



PHA 2500

**Panic Hardware
for narrow stile doors**

The DORMA PHA 2500 panic hardware system.



Innovative, advanced hardware system for emergency exits.

With its PHA 2500 system, DORMA is able to offer a high-quality panic exit device on the basis of an integrated emergency escape lock for single- and double-leaf doors. The system is certified according to EN 1125 and carries the  mark and is ideal for narrow stile doors in emergency exits in which safety, security, reliability and aesthetic elegance are a must. This Panic Hardware system constitutes a further building block in the DORMA product portfolio for the safe

control of emergency escape routes. It satisfies in full the demands placed on emergency exit devices used in public facilities such as hospitals, universities and schools, concert halls, shopping malls, hotels and administrative buildings. With this series, moreover, the external fitting can be provided in form of a DORMA Premium project door furniture to EN 1906, EN 1634-1 and DIN 18273.

Approval certification

The panic exit devices in the DORMA PHA 2500 series are tested and certified to EN 1125.

All products comply with the requirements of Annex ZA to EN 1125 and thus qualify to carry the  mark of conformity.

Additional approval certification of the relevant fire and smoke control doors may be necessary – check local regulations.



Additional information can be retrieved on many of DORMA's products at www.dorma.com.

The abbreviated designations next to the computer symbol  symbol indicate the search terms to be applied in each case.



reddot design award
winner 2006



DESIGNPREIS
2007
NOMINIERT

Contents

	Page
DORMA PHA 2500 für Rohrrahmentüren	
Features and functions	4
Dimensions (single-leaf door)	6
Dimensions (double-leaf door)	8
Dimensions (double-leaf door) with electric strike	10
Applications and installation (single-leaf door)	12
Applications and installation (double-leaf door)	14
Applications and installation (double-leaf door) with electric strike	16
Applications and installation U-forend, latch and bolt 5 mm protruding	18
Components (single-leaf door)	20
Components (double-leaf door)	22
Lock functions	26
Application notes	28
Lever handle fittings	29
Electric Strikes	30

Practical panic hardware – ideal exit devices for narrow-stile doors.

With its series PHA 2500 (touch bar), the DORMA Premium project door furnishings and corresponding complementary accessories, DORMA is able to offer a high-performance panic hardware system ideal for

both internal and external narrow-stile doors. The integrated mortise panic/emergency escape lock enables the door to be engaged by both latch and bolt.

The benefits at a glance

For the trade

- Certified system in one complete pack.
- One actuation touch bar for all door widths.
- Suitable for use in conjunction with stock DORMA Premium project door furnishings.
- Further accessories available for individual applications.

For the architect/specifier

- High-quality appearance with no visible fixing screws.
- Projection from face according to EN 1125.
- Certified system compliant with Euronorm standard.
- All DORMA Premium project door furnishings

compliant with EN 1906, EN 1634-1 and DIN 18273 can be used.

For the fabricator/installer

- Full range of expertise from a single source.
- Easy to install.
- Readily adaptable to different door widths and heights.
- Excellent range of accessories.


For the user

- Optimum safety – even under pre-load, the door can be opened from anywhere across its full width.
- Single-source supply for a full range of customer services.

Data and features	PHA Serie 2500	
	single-leaf door	double-leaf door
Standard doors in emergency escape routes	●	●
Fire and smoke control doors	●	●
Door width ¹⁾	≤ 1300 mm	
	≤ 2600 mm	●
Door height ¹⁾	≤ 2500 mm	●
Max. door leaf weight in kg ¹⁾	200	200
Handling	DIN-R	●
	DIN-L	●
Projection from face ≤ 100 mm	●	●
Narrow stile locks	●	●
Backset (mm)	35/40/45	35/40/45
Europrofile cylinder centres (mm)	92	92
Europrofile cylinder to DIN 18252	●	●
Suitability for use of an electronic EP cylinder	○	○
Lock functions: Transit/Transmission/Change-over	●/●/●	●/●/●
Controlled Latch Retainer	○	○
Forend width (mm)	24	24
U-Forend, Backset 34/39/44 mm	○	○
Locking rod with spring loaded latch lock	○	○
Locking rod with switching lock	–	●
Electric strike Smoke, Fire 447, Fire 442	○	–
Lock case at the inactive leaf with electric strike (incl. monitor contact)		
Backset 55/60/65mm	–	○
Powder-coated silver/special colour	●	●
Mock stainless steel finish	●	●
External fitting (Premium project door furnishings)	○	○
Tested and certified to EN 1125	●	●
CE mark for construction projects	●	●
ISO 9000	●	●

● = yes – = no ○ = option






¹⁾Data correspond to the maximum application scope of EN 1125.

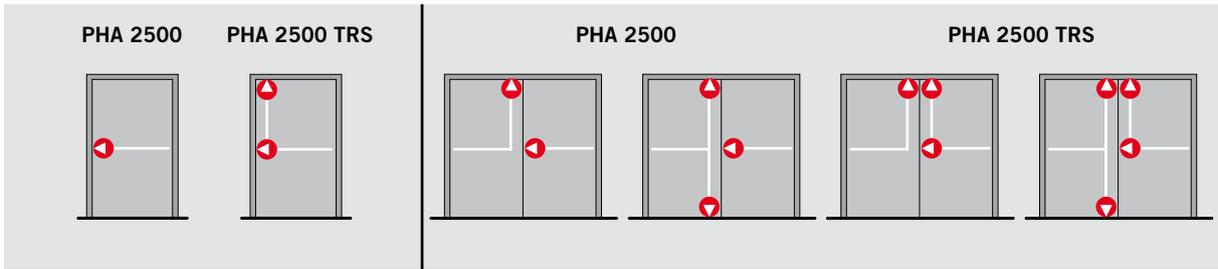



Panic Hardware system PHA 2500

<p>1-point locking</p>	<p>Inactive leaf</p> <p>Active leaf</p> <p>1-point locking</p>
<p>Premium project door furnitures</p>	<p>Premium project door furnitures</p>
<p>2-point locking</p> <p>+</p>	<p>2-point locking</p> <p>+</p>




with electric strike

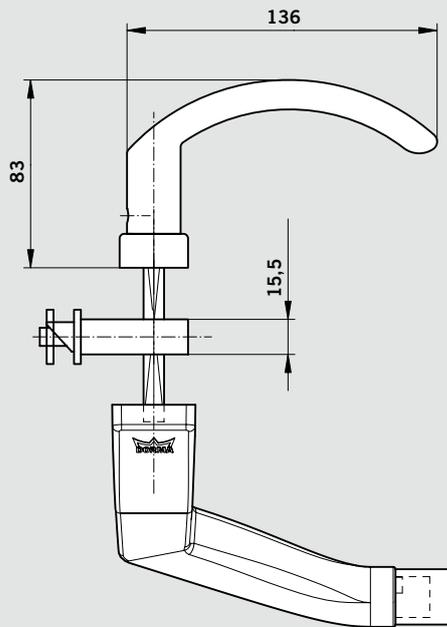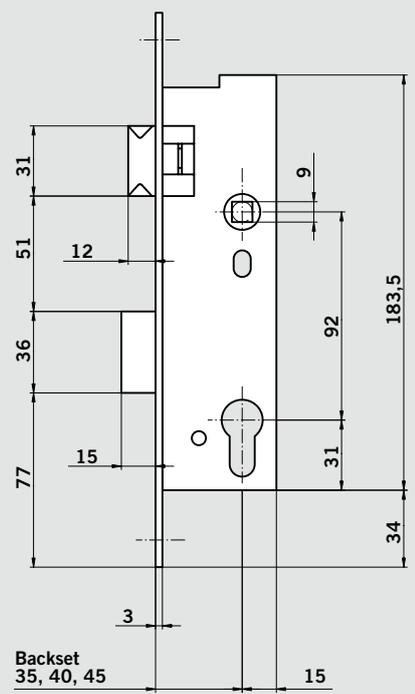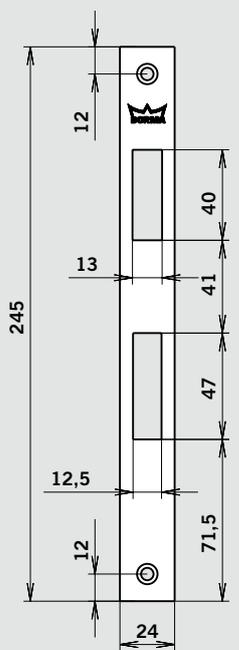
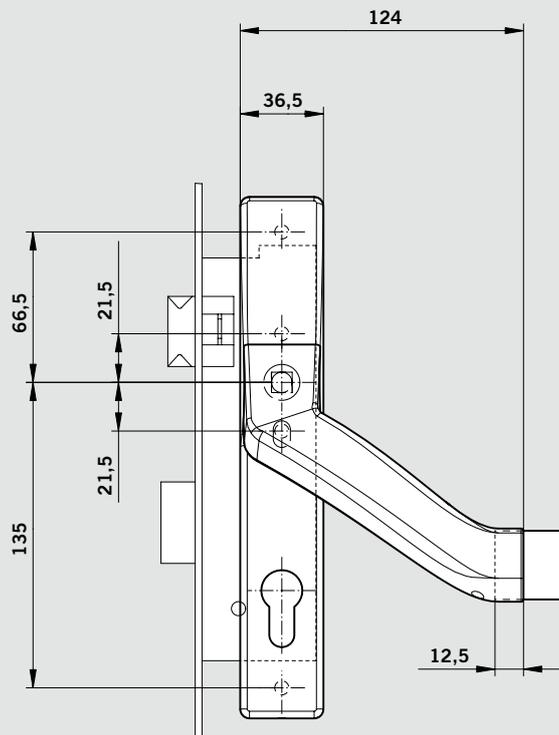
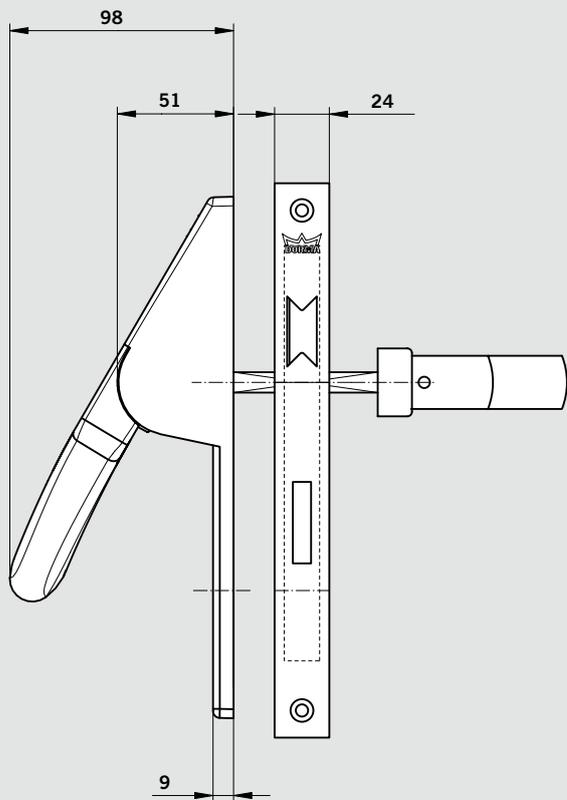




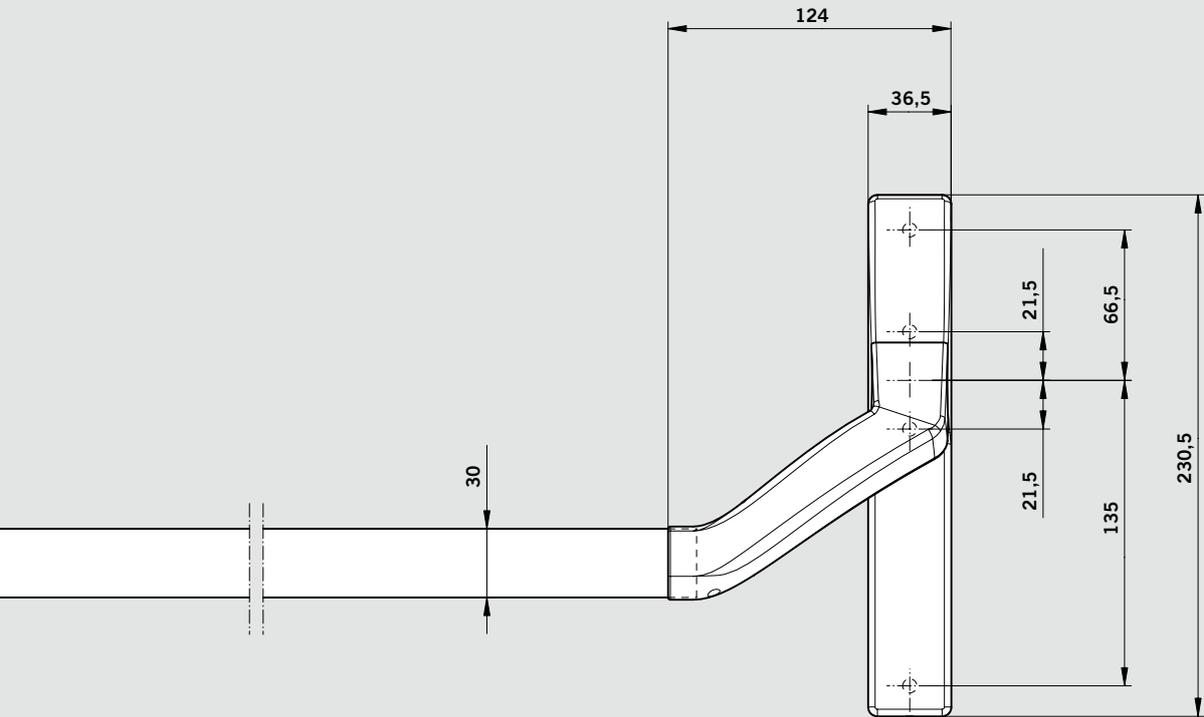


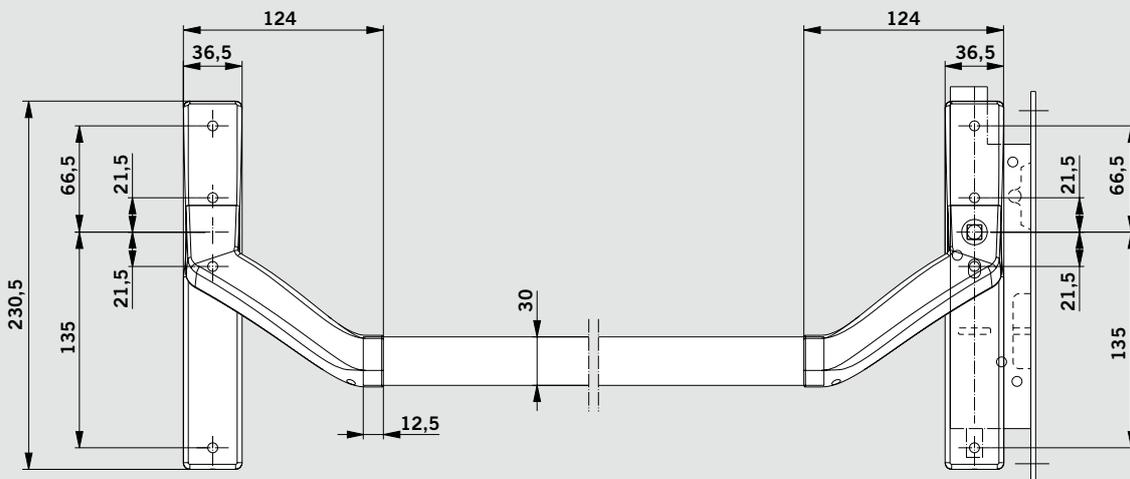


Inactive leaf

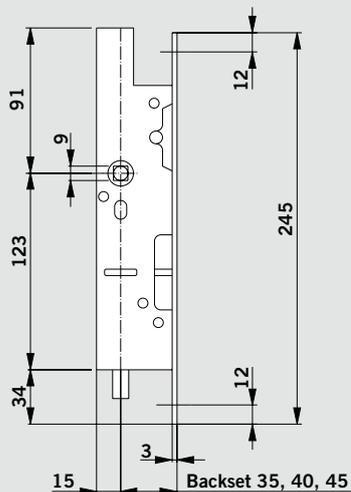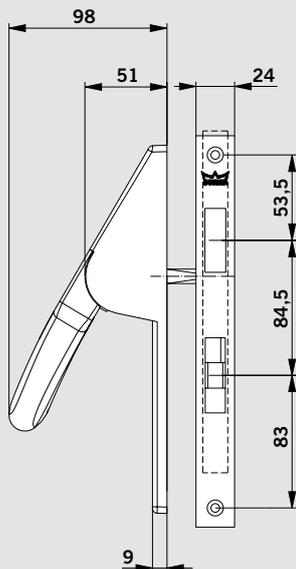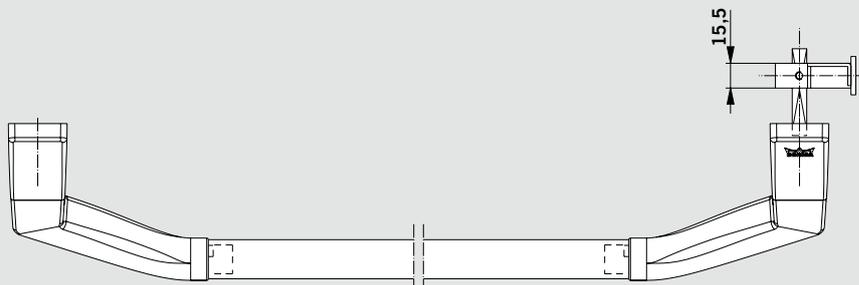

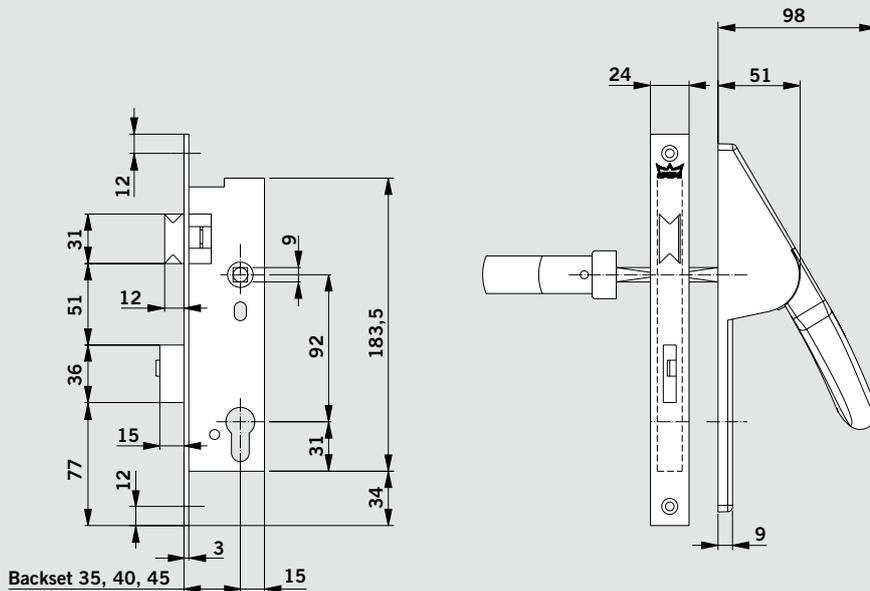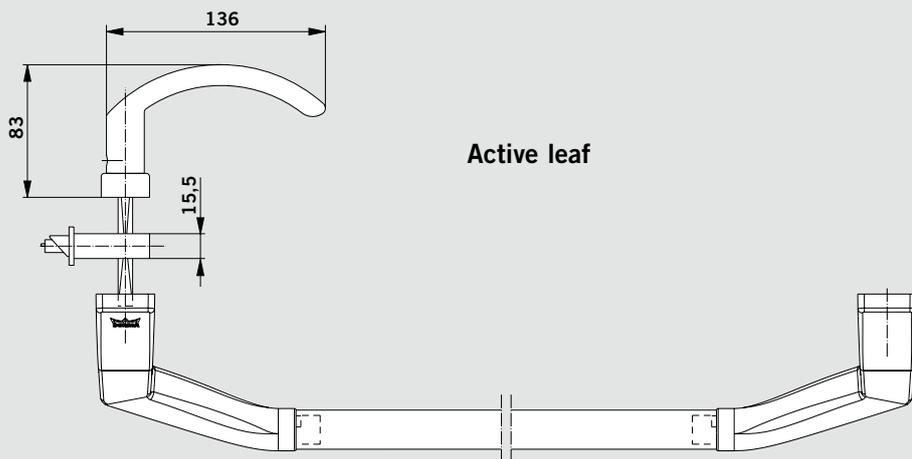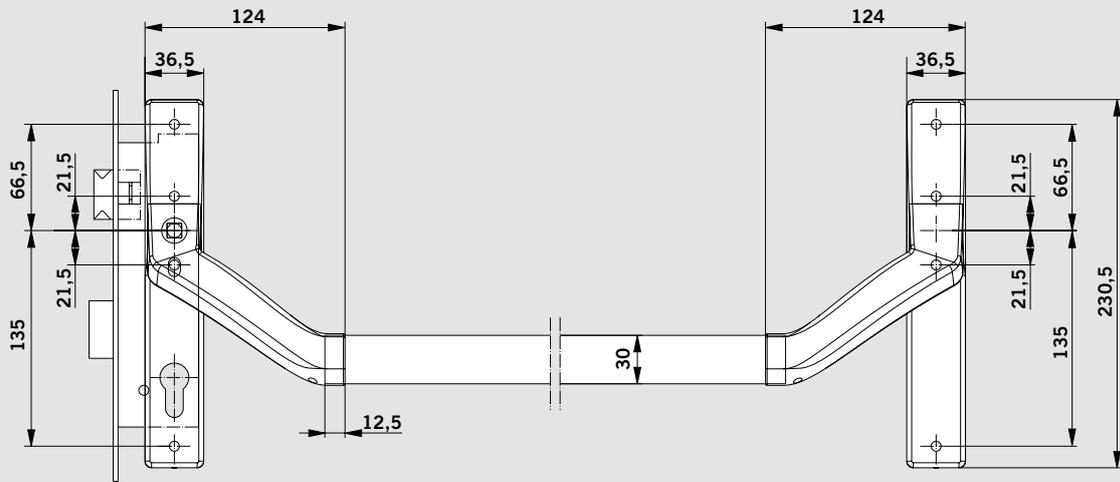

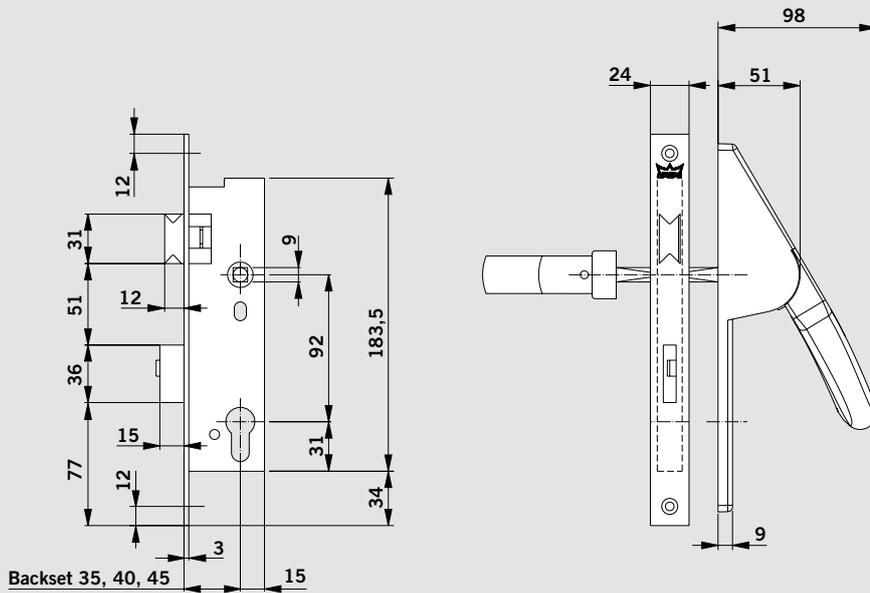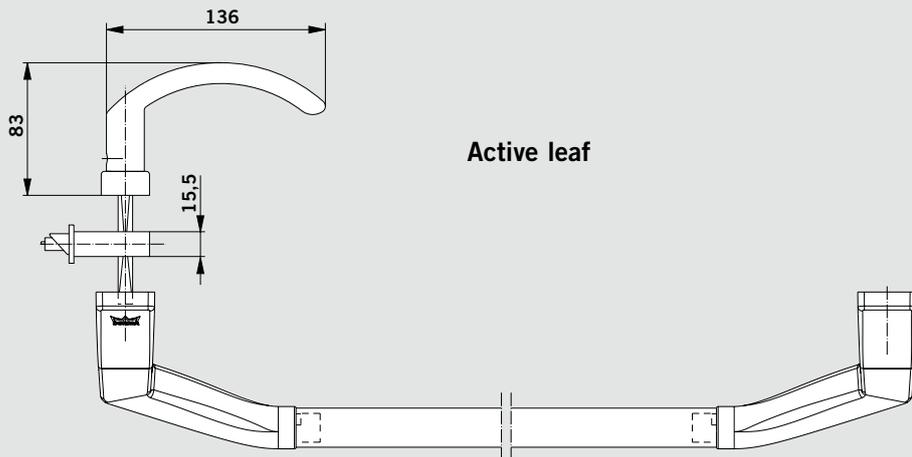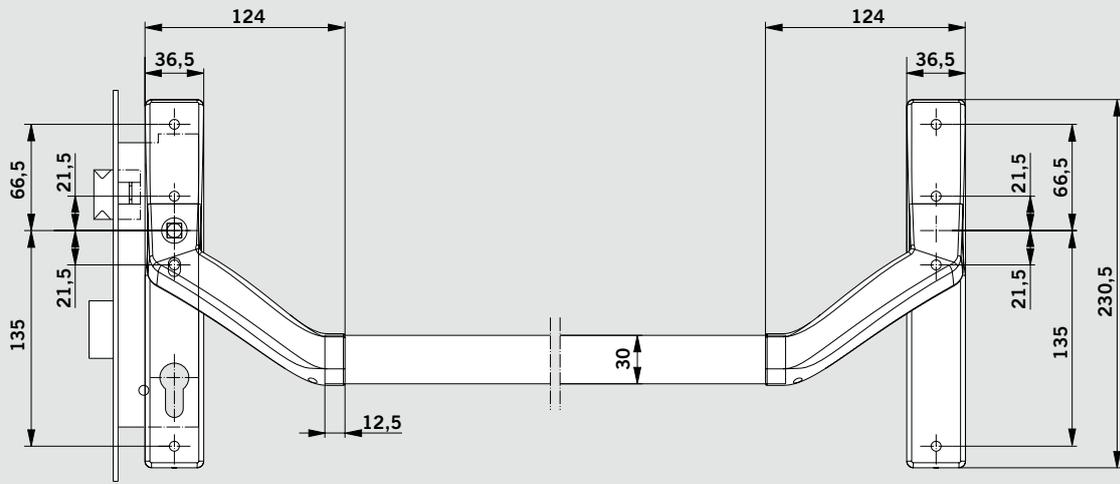


1-point locking, aluminium door

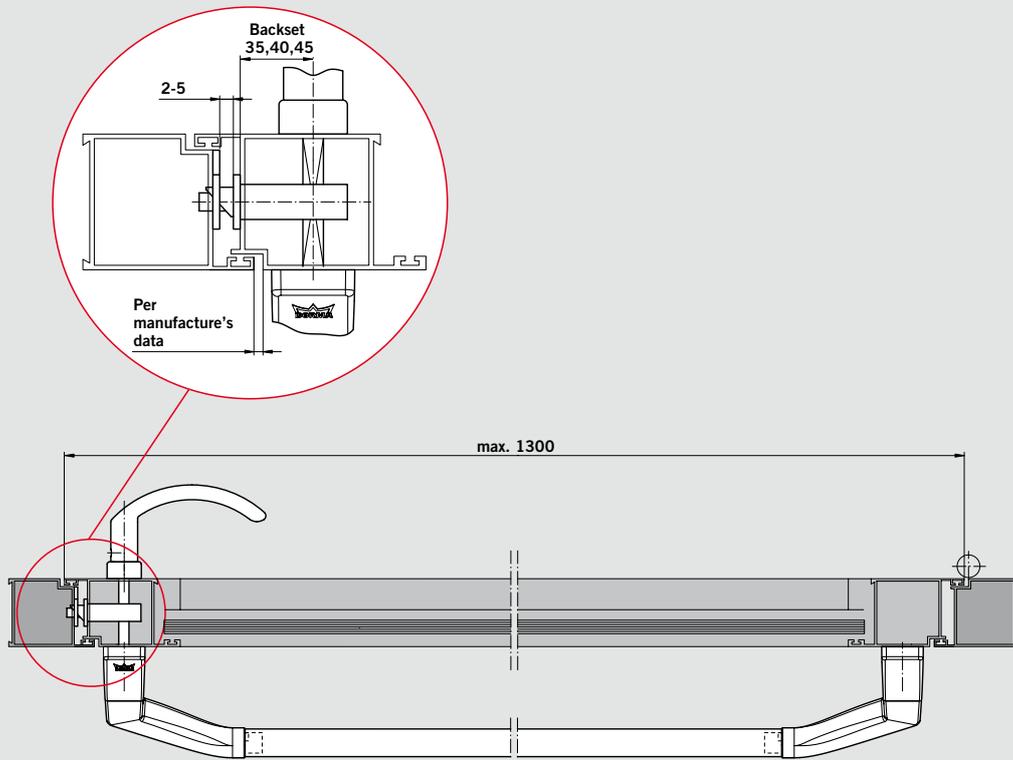


Note advisory on page 28

1-point locking, steel door

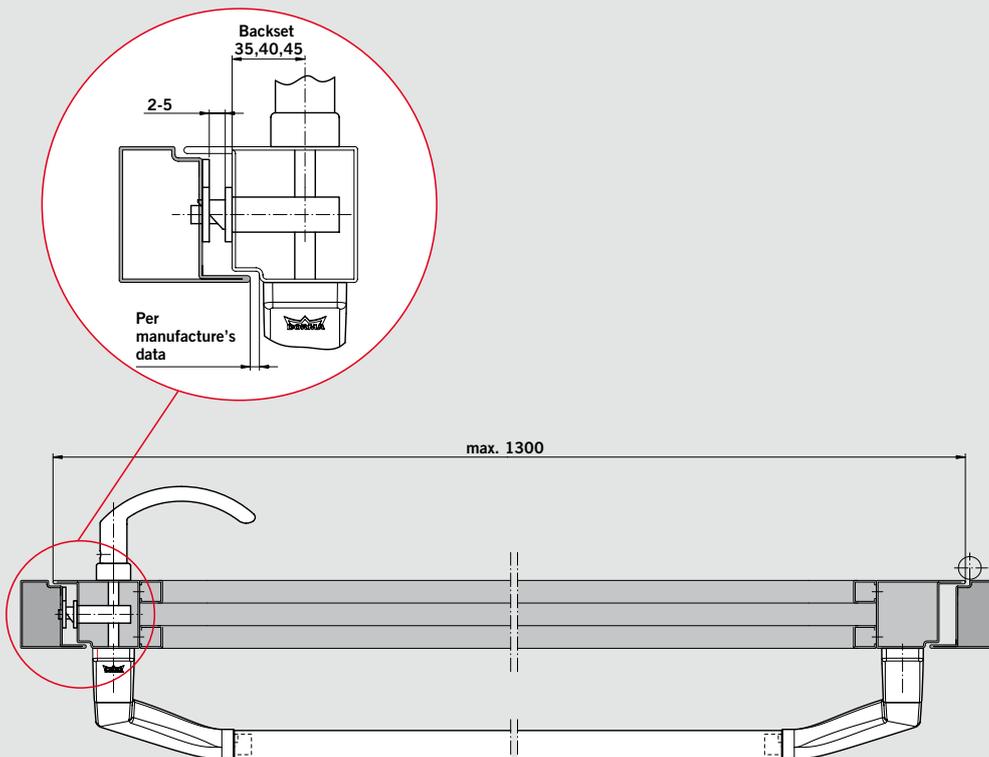


Note advisory on page 28


1-point locking, aluminium door

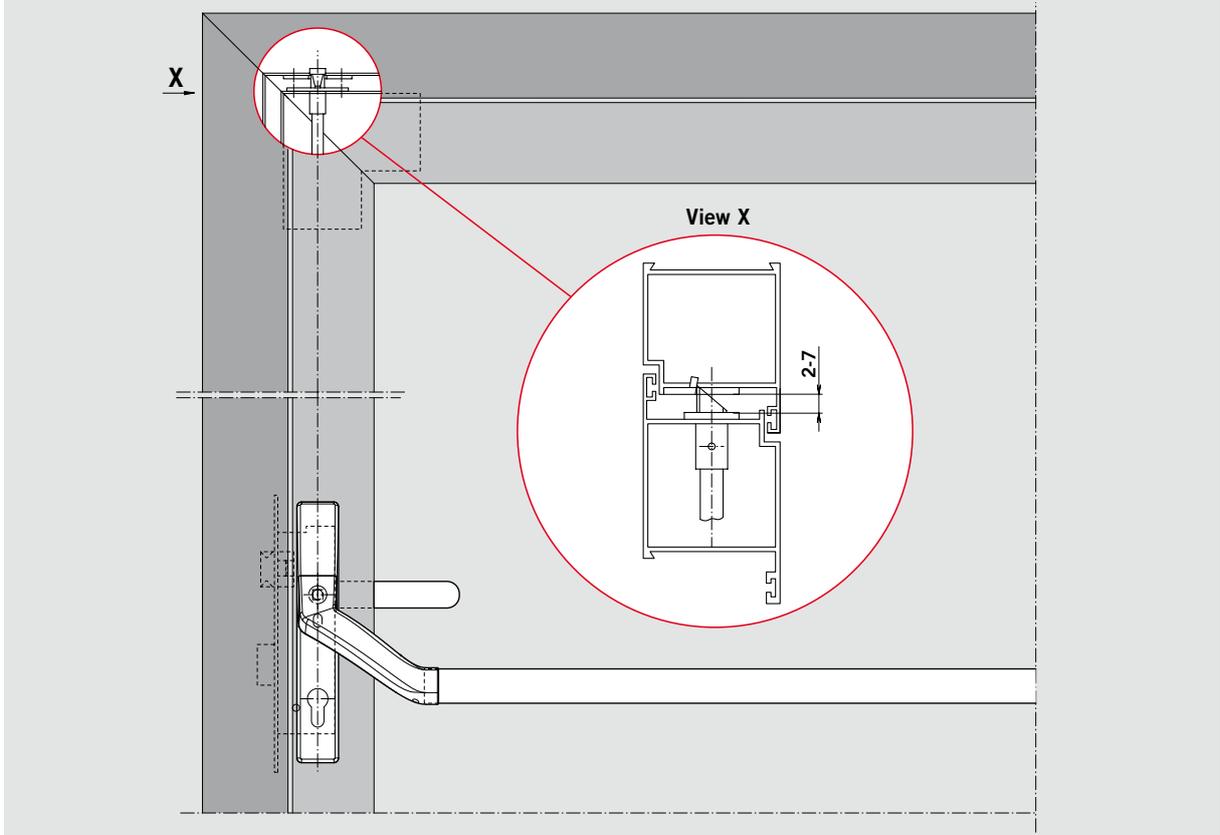

1-point locking, steel door

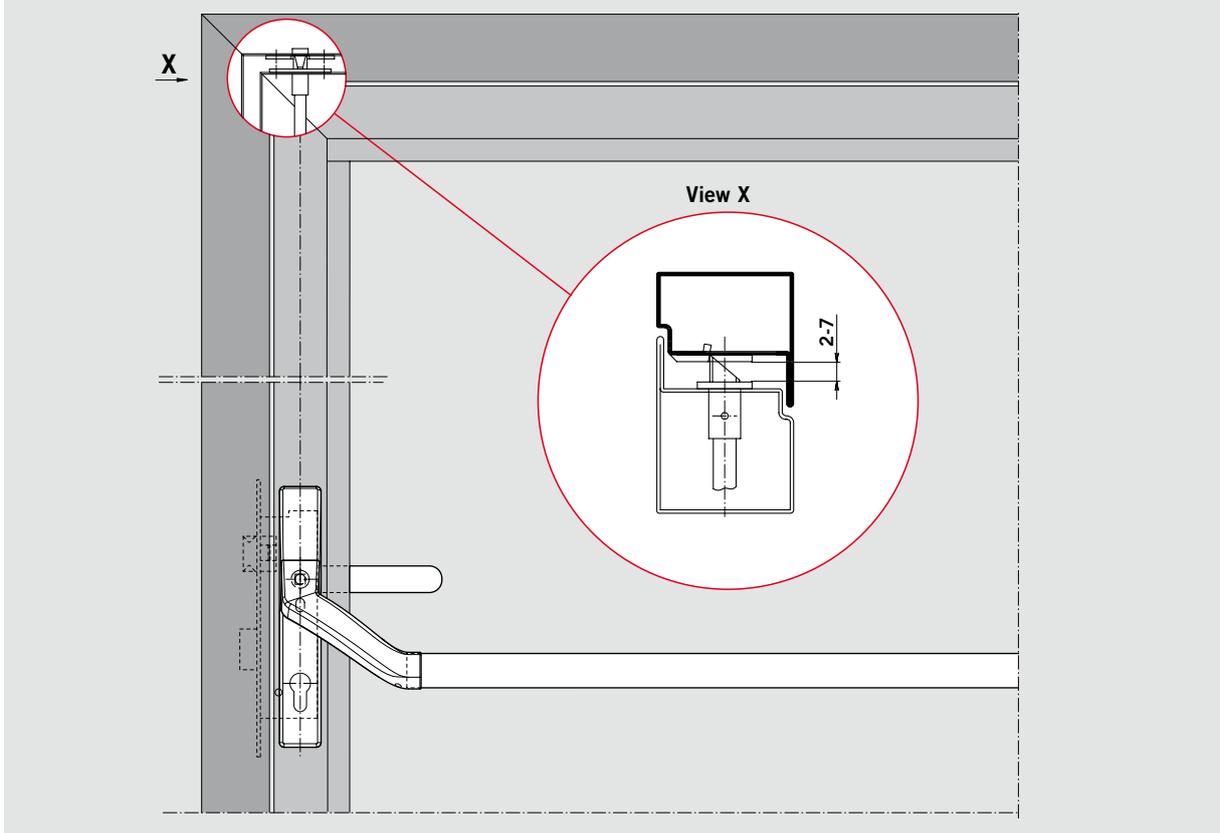


2-point locking, aluminium door

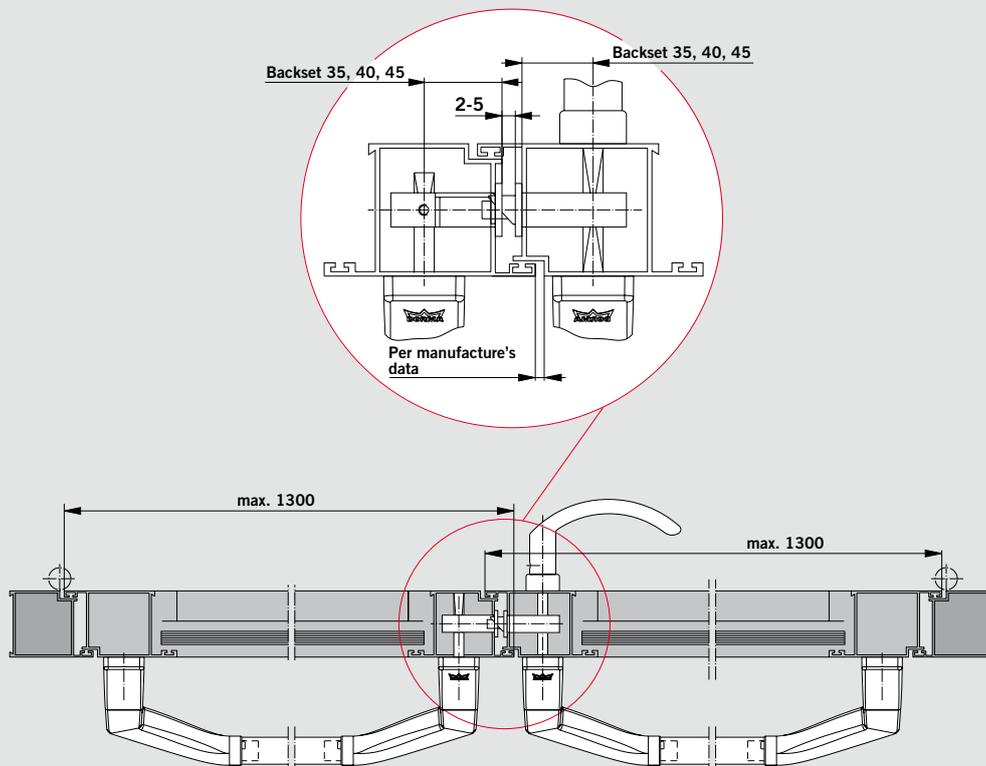


Note advisory on page 28

2-point locking, steel door

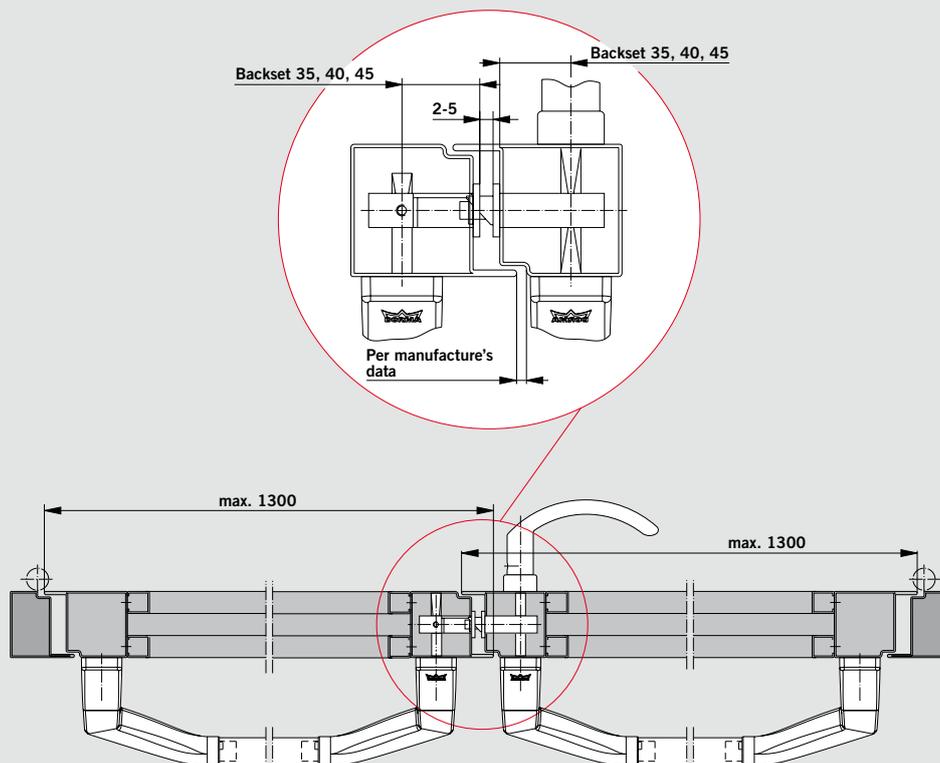


Note advisory on page 28

2-point locking, aluminium door

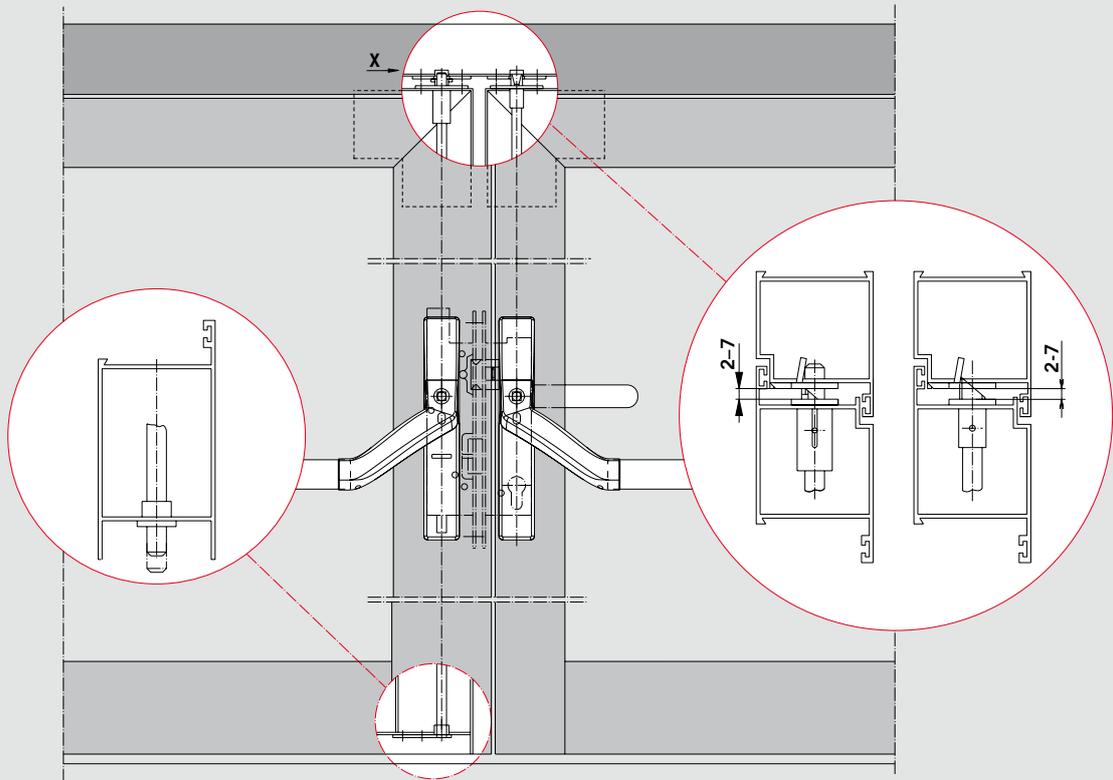


For panic exit devices according to EN 1125 a floor keep is necessary (see page 24)

2-point locking, steel door

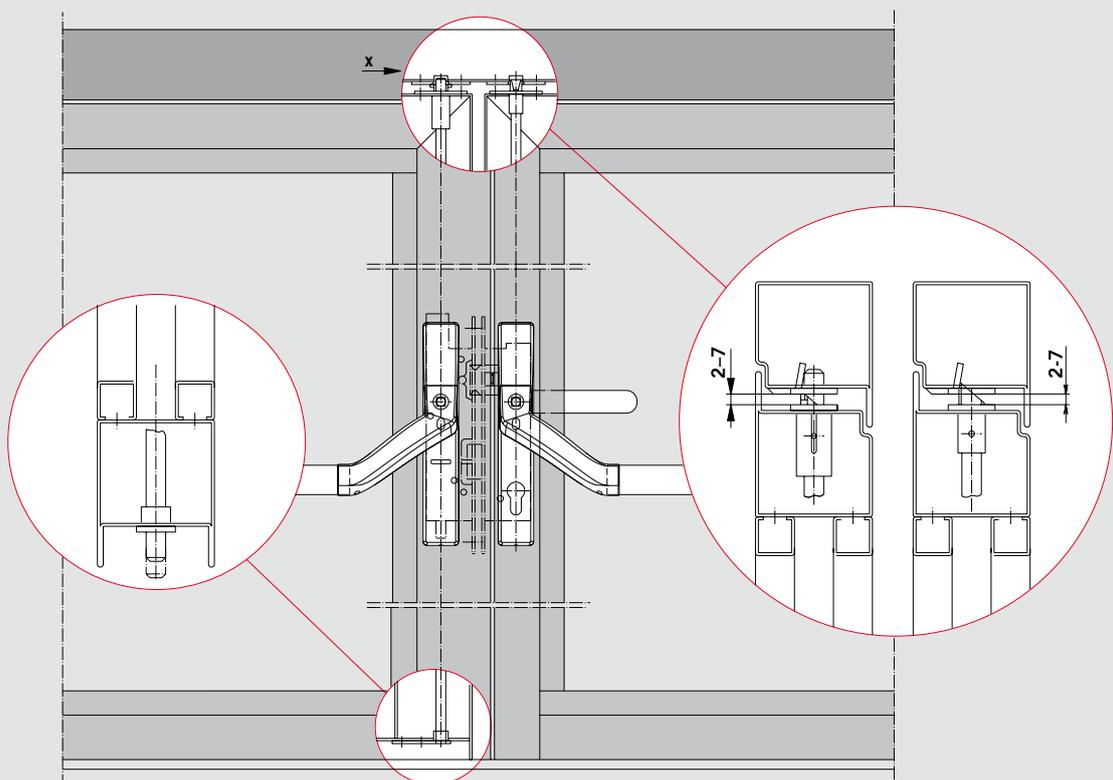


For panic exit devices according to EN 1125 a floor keep is necessary (see page 24)

2-point locking, aluminium door with electric strike

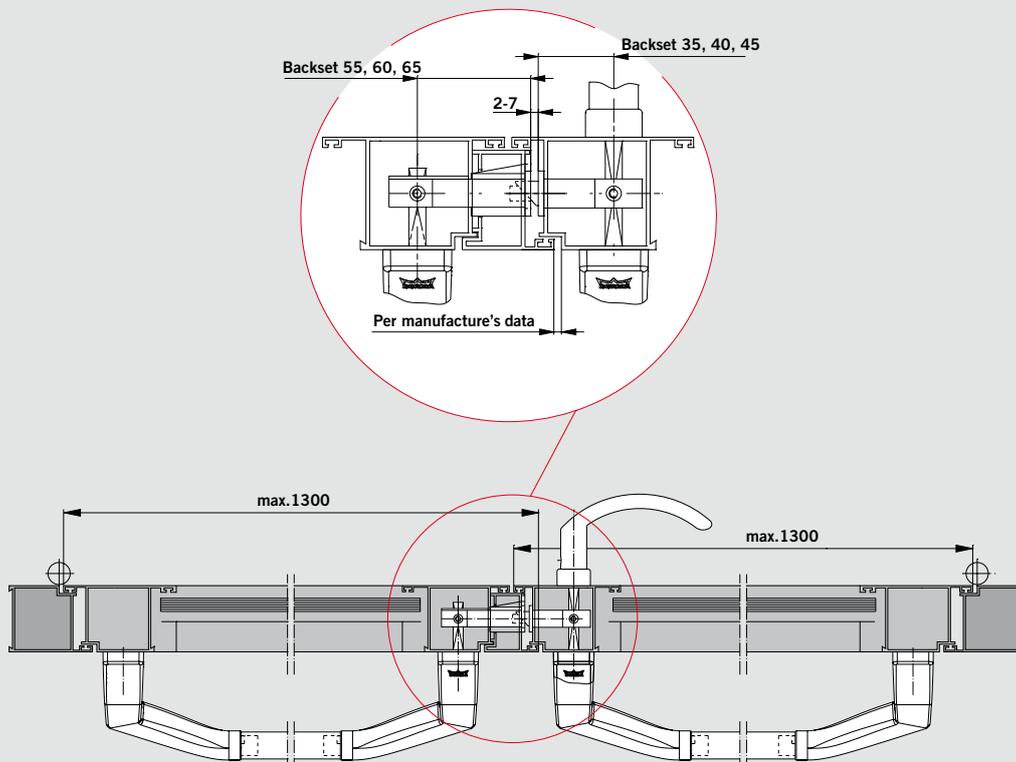


Note advisory on page 28

2-point locking, steel door with electric strike

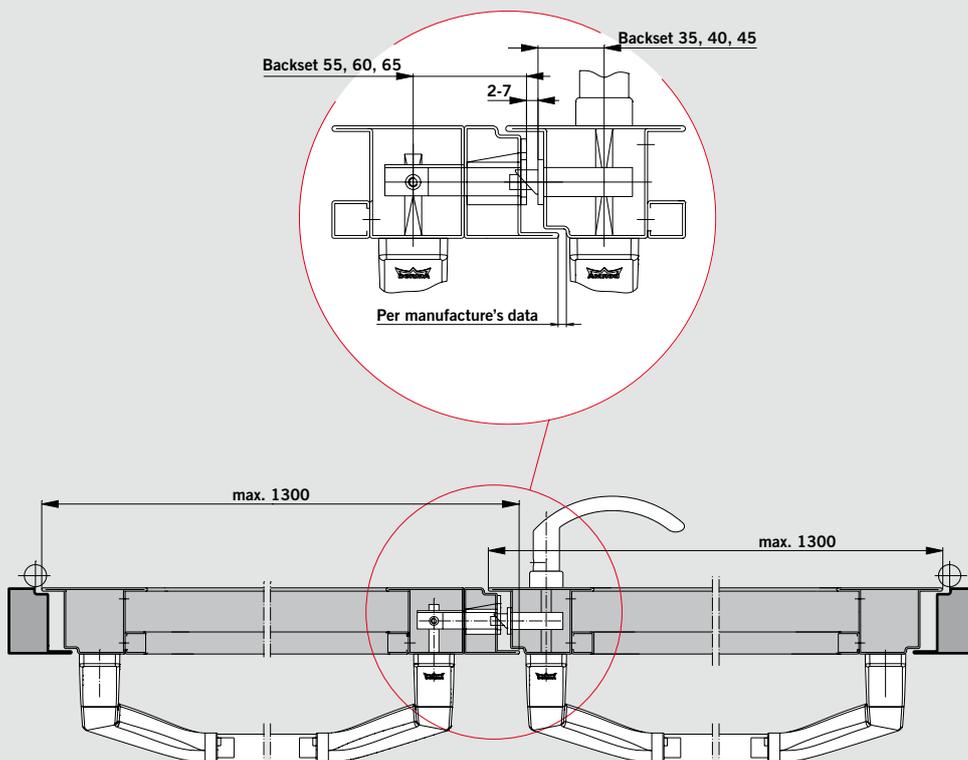


Note advisory on page 28

2-point locking, aluminium door

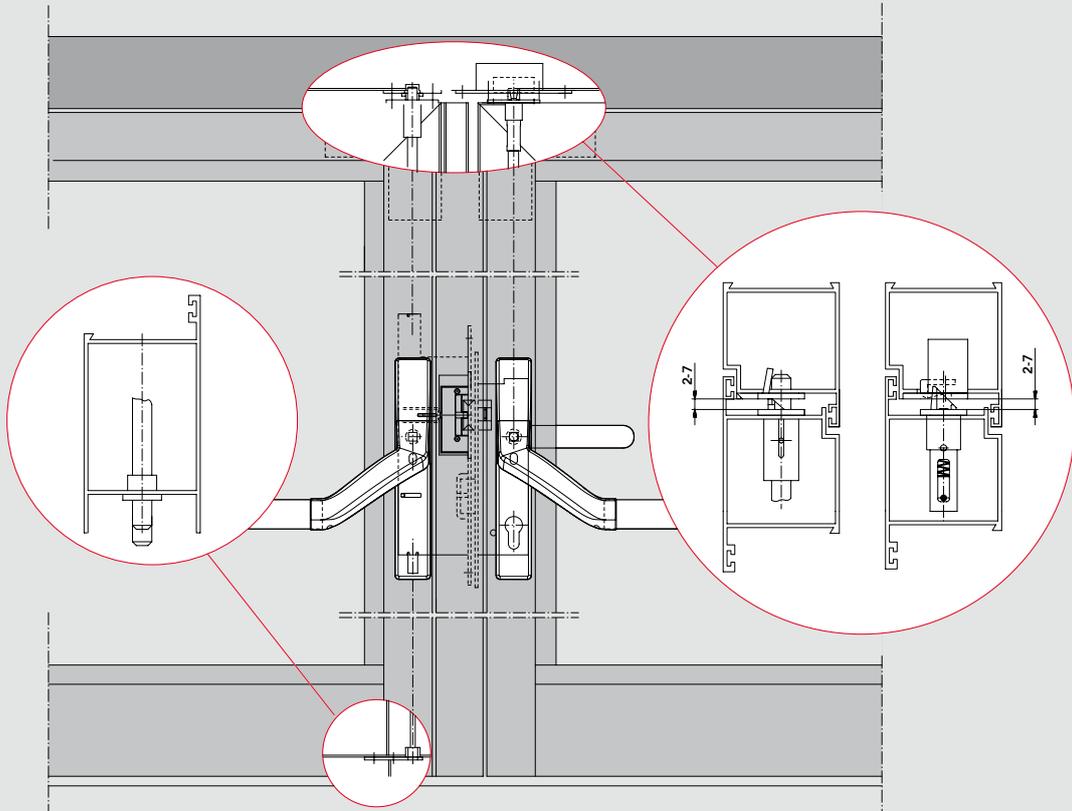


For panic exit devices according to EN 1125 a floor keep is necessary (see page 24)

2-point locking, steel door

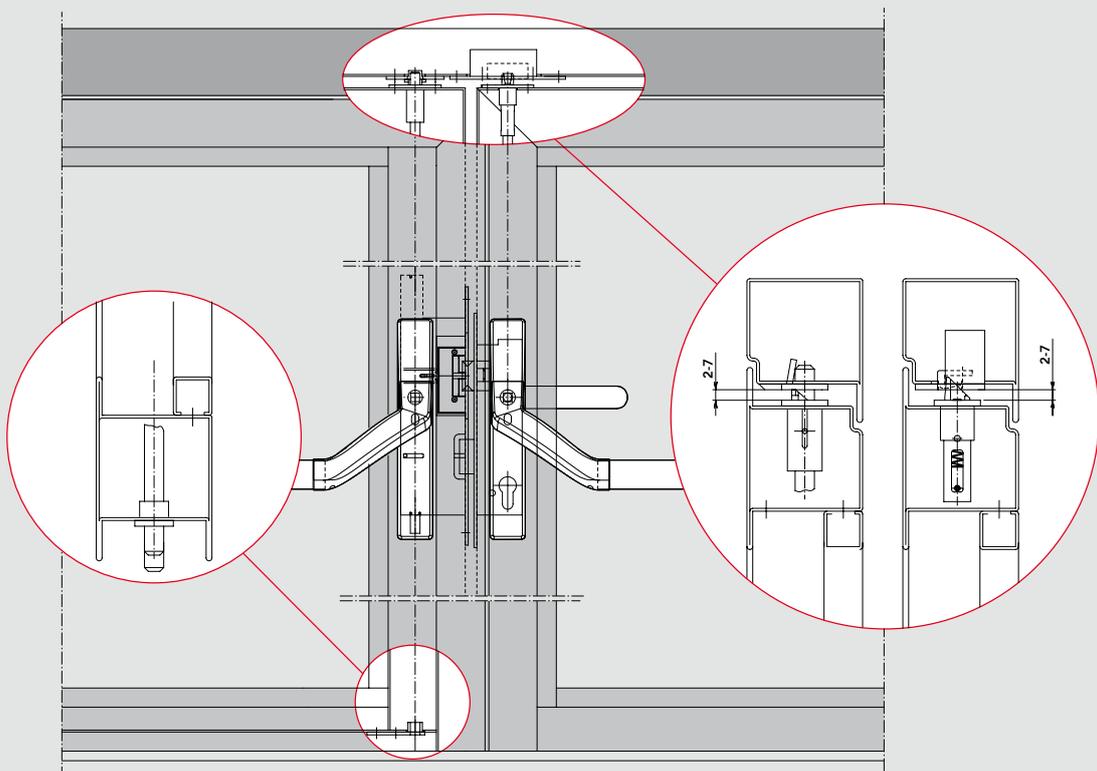


For panic exit devices according to EN 1125 a floor keep is necessary (see page 24)

U-forend, single-leaf aluminium door

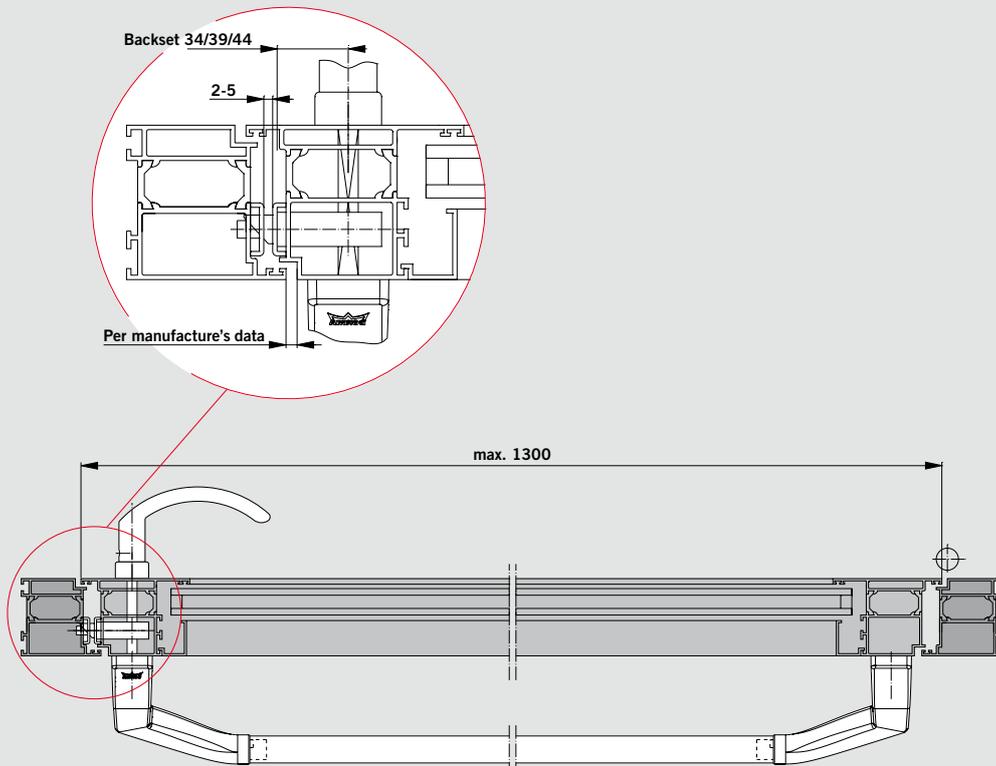


Note advisory on page 28

Latch/bolt 5 mm protruding, single-leaf aluminium door

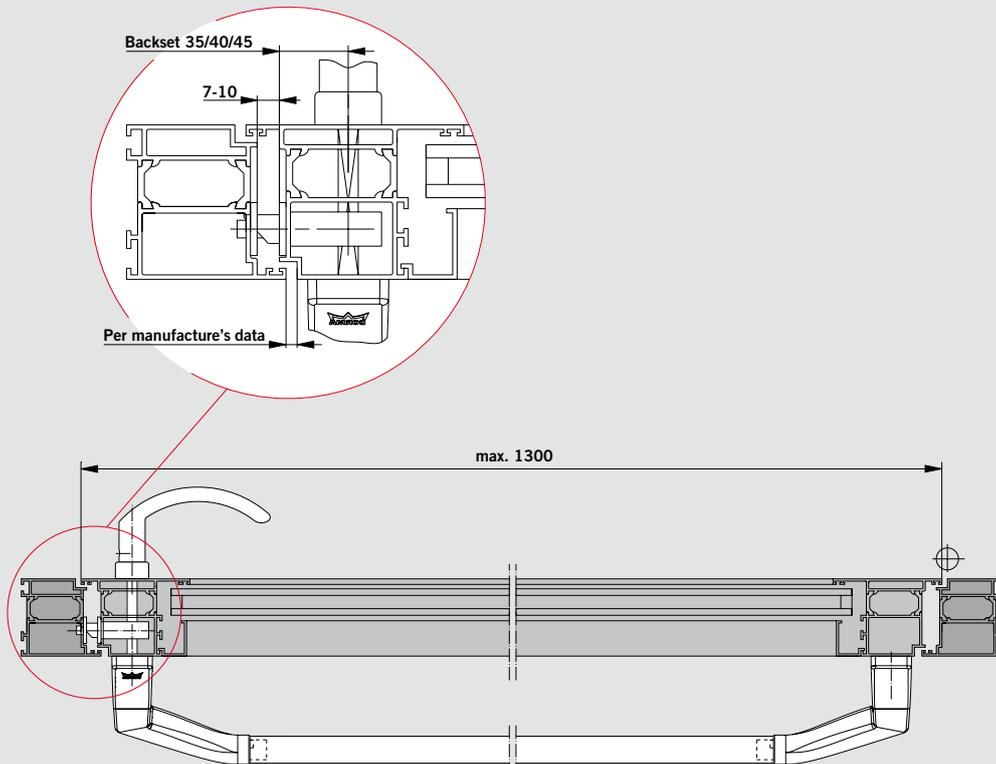


Note advisory on page 28

U-forend, double-leaf aluminium door

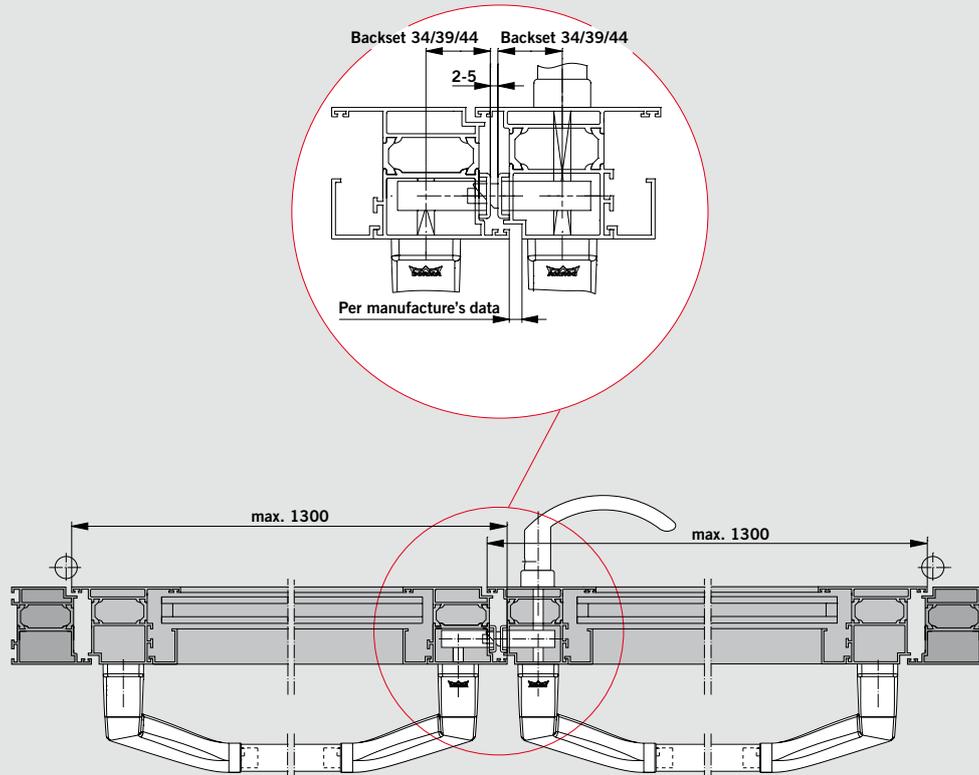

For panic exit devices according to EN 1125 a floor keep is necessary (see page 24)

Latch/bolt 5 mm protruding, double-leaf aluminium door

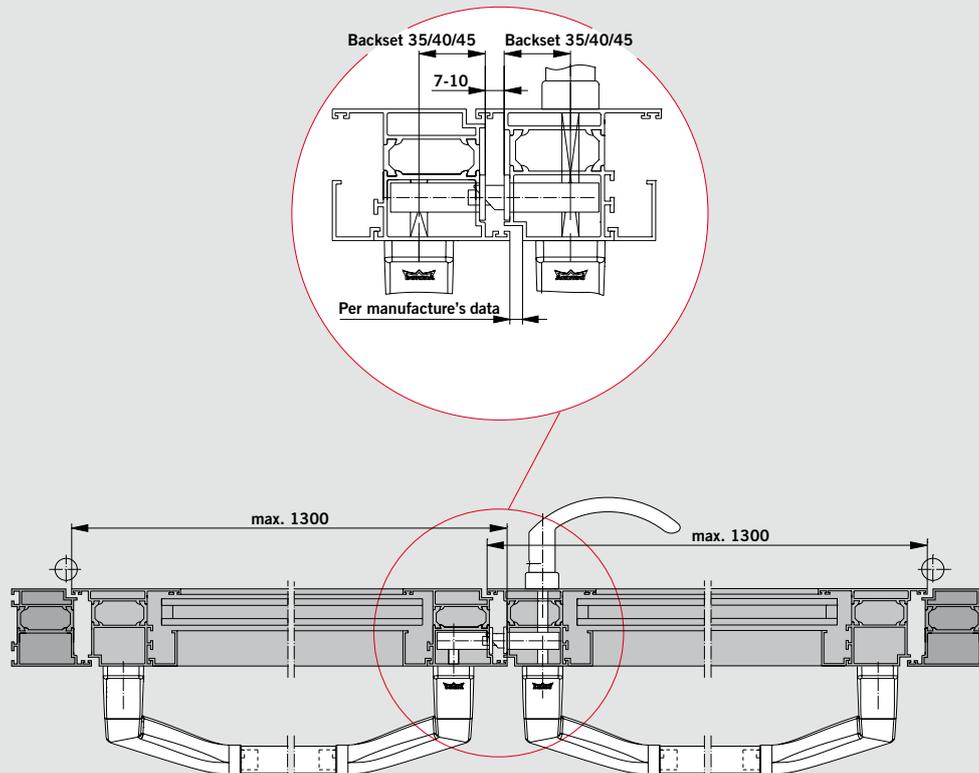

For panic exit devices according to EN 1125 a floor keep is necessary (see page 24)

Specification text

PHA 2500, single-leaf

Panic exit device, compliant with EN 1125, for single-leaf narrow-stile doors, door widths up to 1300 mm; door weight up to 200 kg, projection from face per category 2 ≤ 100 mm, nip-free design, no visible fixing screws.

With narrow stile lock, backset of 35/40/45 mm and

– Mode of operation B / Change-over function

– Mode of operation D / Transit function

– Mode of operation E / Transmission function

Prepared for installation of an electronic cylinder (Europrofile cylinder). Electrical unlocking via DORMA Fire 447,


Fire 442 or Smoke electric strikes. Power supply by others.

All products of the PHA 2500 series carry the **CE** mark.

- Silver
- Mock stainless steel
- Special colour

Order No. 35014 .. 

- ..2511xx01
- ..2511xx04
- ..2511xx09  PHA 2500

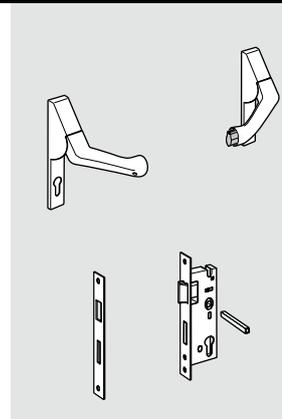**PHA 2500 TRS, single-leaf**

Panic exit device, compliant with EN 1125, for single-leaf narrow-stile doors, door widths up to 1300 mm; door weight up to 200 kg, projection from face per category 2 ≤ 100 mm, nip-free design, no visible fixing screws.

With narrow stile lock, backset of 35/40/45 mm and

– Mode of operation B / Change-over function

– Mode of operation D / Transit function

– Mode of operation E / Transmission function incl. snap lock.


Prepared for installation of an electronic cylinder (Europrofile cylinder). Electrical unlocking via DORMA Fire 447,

Fire 442 or Smoke electric strikes. Power supply by others.

All products of the PHA 2500 series carry the **CE** mark.

- Silver
- Mock stainless steel
- Special colour


- ..2511xx01
- ..2511xx04
- ..2511xx09  PHA 2500

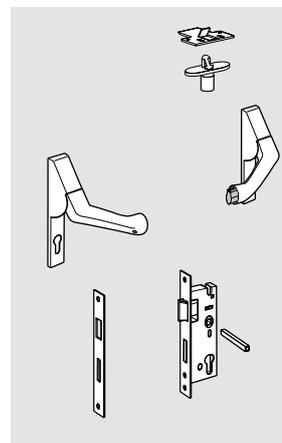**PHA 2105 Connecting rod**

for PHA 2500, door widths up to 1300 mm

- Silver
- Mock stainless steel
- Special colour


- ..21050001
- ..21050004
- ..21050009

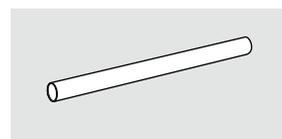**PHA 2140 Locking rod at the top**


for PHA 2500 TRS

Tube Ø 10 mm, for door heights up to 2500 mm

- ..25150000

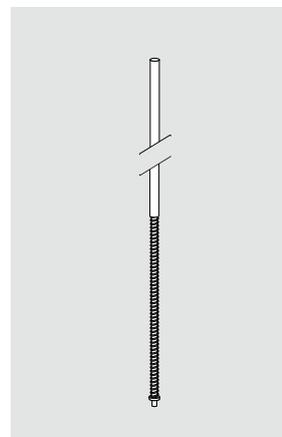

xx = Variant lock function

Product	Handing	Backset	Lock function	Order-No. 35014 ..
PHA 2500 single-leaf 1-point-locking 	L	35	D Transit	.. 251101xx
			E Transmission	.. 251102xx
			B Change-over	.. 251103xx
		40	D Transit	.. 251104xx
			E Transmission	.. 251105xx
			B Change-over	.. 251106xx
		45	D Transit	.. 251107xx
			E Transmission	.. 251108xx
			B Change-over	.. 251109xx
	R	35	D Transit	.. 251110xx
			E Transmission	.. 251111xx
			B Change-over	.. 251112xx
		40	D Transit	.. 251113xx
			E Transmission	.. 251114xx
			B Change-over	.. 251115xx
		45	D Transit	.. 251116xx
			E Transmission	.. 251117xx
			B Change-over	.. 251118xx
PHA 2500 TRS single-leaf 2-point-locking 	L	35	D Transit	.. 251119xx
			E Transmission	.. 251120xx
			B Change-over	.. 251121xx
		40	D Transit	.. 251122xx
			E Transmission	.. 251123xx
			B Change-over	.. 251124xx
		45	D Transit	.. 251125xx
			E Transmission	.. 251126xx
			B Change-over	.. 251127xx
	R	35	D Transit	.. 251128xx
			E Transmission	.. 251129xx
			B Change-over	.. 251130xx
		40	D Transit	.. 251131xx
			E Transmission	.. 251132xx
			B Change-over	.. 251133xx
		45	D Transit	.. 251134xx
			E Transmission	.. 251135xx
			B Change-over	.. 251136xx

Locks with controlled latch retainer in conjunction with lock function E (Transmission) on request.
 For description of lock functions see pages 26, 27.

xx = Colour
 01 = Silver
 04 = Mock stainless steel
 09 = Special colour

Lever handle spindles: Note advisory on page 28.

Specification text

PHA 2500, double-leaf

Panic exit device, compliant with EN 1125, for double-leaf narrow-stile doors, door widths up to 1300 mm; door weight up to 200 kg, projection from face per category 2 \leq 100 mm, nip-free design, no visible fixing screws.

With narrow stile lock at the active-leaf, backset of 35/40/45 mm and

- Mode of operation B / Change-over function
- Mode of operation D / Transit function
- Mode of operation E / Transmission function

Prepared for installation of an electronic cylinder (Europrofile cylinder).

Inactive leaf with locking rod at the top and lock case, backset of 35/40/45 mm, incl. switching lock and rod guide.

All products of the PHA 2500 series carry the **CE** mark.

PHA 2510, active-leaf

- Silver
- Mock stainless steel
- Special colour

..2512xx01

..2512xx04

..2512xx09  PHA 2500**PHA 2520, inactive-leaf**

- Silver
- Mock stainless steel
- Special colour

..2514xx01

..2514xx04

..2514xx09  PHA 2500**PHA 2500 TRS, double-leaf**

Panic exit device, compliant with EN 1125, for double-leaf narrow-stile doors, door widths up to 1300 mm; door weight up to 200 kg, projection from face per category 2 \leq 100 mm, nip-free design, no visible fixing screws.

Active leaf with locking rod at the top and narrow stile lock, backset of 35/40/45 mm and

- Mode of operation B / Change-over function
- Mode of operation D / Transit function
- Mode of operation E / Transmission function

Prepared for installation of an electronic cylinder (Europrofile cylinder).

Inactive leaf with locking rod at the top and lock case, backset of 35/40/45 mm, incl. switching lock and rod guide.

All products of the PHA 2500 series carry the **CE** mark.

PHA 2510 TRS, active-leaf

- Silver
- Mock stainless steel
- Special colour

..2512xx01

..2512xx04

..2512xx09  PHA 2500**PHA 2520 TRS, inactive-leaf**





- Silver
- Mock stainless steel
- Special colour

..2514xx01

..2514xx04

..2514xx09  PHA 2500

xx = Variant lock function

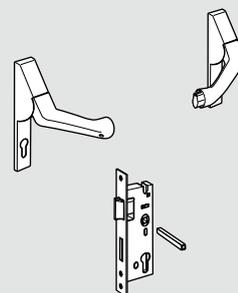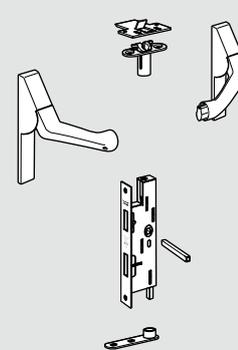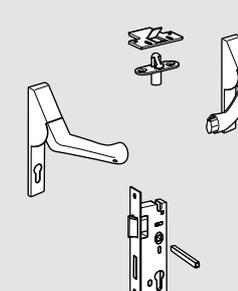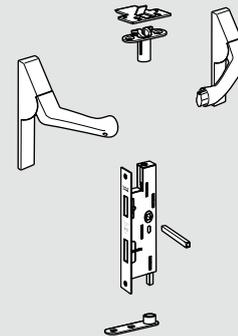Order No. 35014 .. **PHA 2510****PHA 2520 TRS****PHA 2510 TRS****PHA 2520 TRS**

Specification text
PHA 2500 with electric strike, double-leaf

Panic exit device, compliant with EN 1125, for double-leaf narrow-stile doors, door widths up to 1300 mm; door weight up to 200 kg, projection from face per category 2 ≤ 100 mm, nip-free design, no visible fixing screws.

With narrow stile lock at the active-leaf, backset of 35/40/45 mm and

- Mode of operation B / Change-over function
- Mode of operation D / Transit function
- Mode of operation E / Transmission function

Prepared for installation of an electronic cylinder (Europrofile cylinder).

Inactive leaf with locking rod at the top and lock case, backset of 55/60/65 mm, incl. spring loaded snap lock. All products of the PHA 2500 series carry the **CE** mark.

PHA 2510, active leaf

- Silver
- Mock stainless steel

PHA 2521 TRS, inactive leaf, forend without lap

- silberfarbig
- Edelstahl-Design

PHA 2522 TRS, inactive leaf, forend with lap

- silberfarbig
- Mock stainless steel

PHA 2500 with electric strike, double-leaf

Panic exit device, compliant with EN 1125, for double-leaf narrow-stile doors, door widths up to 1300 mm; door weight up to 200 kg, projection from face per category 2 < 100 mm, nip-free design, no visible fixing screws.

Active leaf with locking rod at the top (in combination with special strike plate 9366 or 9361 and spring loaded snap lock) and narrow stile lock, backset of 35/40/45 mm and

- Mode of operation B / Change-over function
- Mode of operation D / Transit function
- Mode of operation E / Transmission function

Prepared for installation of an electronic cylinder (Europrofile cylinder).

Inactive leaf with locking rod at the top and lock case, backset of 55/60/65 mm, incl. spring loaded snap lock. All products of the PHA 2500 series carry the **CE** mark.

PHA 2510 TRS, active leaf

- Silver
- Mock stainless steel

PHA 2521 TRS, inactive leaf, forend without lap

- Silver
- Mock stainless steel

PHA 2522 TRS, inactive leaf, forend with lap

- Silver
- Mock stainless steel

Order No. 35014 ..


..2512xx01
 ..2512xx04 PHA 2500

..2515xx01
 ..2515xx04 PHA 2500





..2515xx01
 ..2515xx04 PHA 2500




..2512xx01
 ..2512xx04 PHA 2500


..2515xx01
 ..2515xx04 PHA 2500

..2515xx01
 ..2515xx04 PHA 2500

xx = Variant lock function

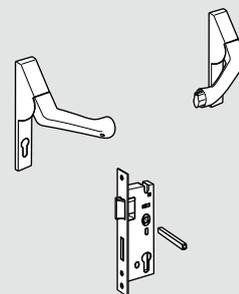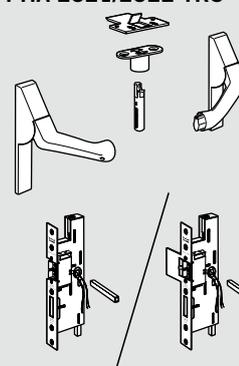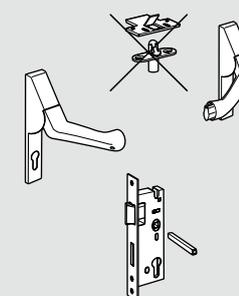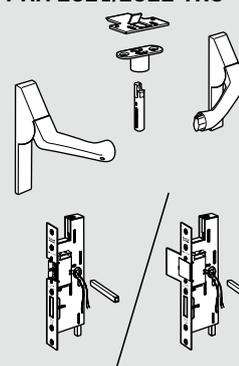PHA 2510

PHA 2521/2522 TRS

PHA 2510 TRS

PHA 2521/2522 TRS


Specification text	Order No. 35014 .. 	
<p>PHA 2105 Connecting rod for PHA 2510 and PHA 2520, for door widths up to 1300 mm</p> <ul style="list-style-type: none"> <input type="checkbox"/> Silver ..21050001 <input type="checkbox"/> Mock stainless steel ..21050004 <input type="checkbox"/> Special colour ..21050009 		
<p>PHA 2140 TRS locking rod at the top for PHA 2510 TRS (active-leaf) and PHA 2520 TRS (inactive-leaf) Tube Ø 10 mm, for door heights up to 2500 mm</p>	..25150000	
<p>PHA 2195 TRB locking rod at the bottom for PHA 2520 TRS (inactive-leaf) Solid bar Ø 10 mm, lever handle heights 1050 mm</p>	..21950000	
<p>PHA 2122 Floor keep for locking of the PHA 2195 TRB at the inactive leaf. Required for panic exit devices to EN 1125. Model:</p> <ul style="list-style-type: none"> PHA 2122-0 (0 mm) ..21220000 PHA 2122-1 (-2 mm) ..21222000 PHA 2122-4 (-4 mm) ..21224000 		
<p>PHA 2121 Adjustable floor keep for locking of the PHA 2195 TRB at the inactive leaf. Required for panic exit devices to EN 1125.</p>	..21210000	
<p>PHA 9361 Strike plate for electric strike in conjunction with PHA 2510 TRS (active leaf)</p>	..93610000	
<p>PHA 9366 strike plate with lap for electric strike in conjunction with PHA 2510 TRS (active leaf)</p>	..93660000	
<p>PHA 9834 Spring loaded snap lock in conjunction with PHA 2510 TRS (active leaf) and 9361/9366</p>	..98340000	

Product	Handing	Backset	Lock function	Order No. 35014 ..
PHA 2510 double-leaf, active-leaf, 1-point locking 	L	35	D Transit	.. 251201xx
			E Transmission	.. 251202xx
			B Change-over	.. 251203xx
		40	D Transit	.. 251204xx
			E Transmission	.. 251205xx
			B Change-over	.. 251206xx
		45	D Transit	.. 251207xx
			E Transmission	.. 251208xx
			B Change-over	.. 251209xx
	R	35	D Transit	.. 251210xx
			E Transmission	.. 251211xx
			B Change-over	.. 251212xx
		40	D Transit	.. 251213xx
			E Transmission	.. 251214xx
			B Change-over	.. 251215xx
45		D Transit	.. 251216xx	
		E Transmission	.. 251217xx	
		B Change-over	.. 251218xx	
PHA 2510 TRS double-leaf, active-leaf, 2-point locking 	L	35	D Transit	.. 251219xx
			E Transmission	.. 251220xx
			B Change-over	.. 251221xx
		40	D Transit	.. 251222xx
			E Transmission	.. 251223xx
			B Change-over	.. 251224xx
		45	D Transit	.. 251225xx
			E Transmission	.. 251226xx
			B Change-over	.. 251227xx
	R	35	D Transit	.. 251228xx
			E Transmission	.. 251229xx
			B Change-over	.. 251230xx
		40	D Transit	.. 251231xx
			E Transmission	.. 251232xx
			B Change-over	.. 251233xx
45		D Transit	.. 251234xx	
		E Transmission	.. 251235xx	
		B Change-over	.. 251236xx	
PHA 2520 TRS double-leaf, inactive-leaf, 1- and 2-point locking 	L/R	35	–	.. 251419xx
		40	–	.. 251420xx
		45	–	.. 251421xx
				xx = Colour 01 = Silver 04 = Mock stainless steel 09 = Special colour
PHA 2521 TRS double-leaf, inactive-leaf, 1-point locking 	L	55	–	.. 251507xx
		60	–	.. 251508xx
		65	–	.. 251509xx
	R	55	–	.. 251510xx
		60	–	.. 251511xx
		65	–	.. 251512xx
PHA 2522 TRS double-leaf, inactive leaf, 1-point locking 	L	55	–	.. 251501xx
		60	–	.. 251502xx
		65	–	.. 251503xx
	R	55	–	.. 251504xx
		60	–	.. 251505xx
		65	–	.. 251506xx

Locks with controlled latch retainer in conjunction with lock function E (Transmission) on request.
 For description of lock functions see pages 26, 27.

Lever handle spindles: Note advisory on page 28

xx = Colour
 01 = Silver
 04 = Mock stainless steel

Lock functions					
	Basic setting	Inner face	Outer face	Return to basic setting following passage from	
				inside	outside
F Transmission function	Locked				
	Not locked				
 Controlled Latch Retainer	Not locked latch hold inside the lock case				
D Transit function	Locked				
	Not locked				
B Change-over function	Locked				
	Not locked Lever handle not engaged				

Transmission function E

For doors in which unauthorised opening from the outside must be reliably prevented. Opening of the door from the inside (danger side) is always possible.

In the event of a panic situation, the latch and the engaged bolt are retracted simultaneously by actuating the exit device from the inside. The bolt remains withdrawn and can be locked again using the key.

On the outside is a fixed dead knob. The door can be unlocked and the latch retracted using the key. Locking is always performed with the key.

Controlled Latch Retainer (Option)

For doors in which passage from the outside is always necessary. The latch is retracted with the key.

In this position the latch retainer can be pushed up. The latch is now held inside the lock case. The retracted latch is released by projecting the dead bolt.

Not permitted for fire- and smoke control doors.

Transit function D

For doors in which passage from the outside may occasionally be necessary. Opening of the door from the inside (danger side) is always possible. Following panic activation, access from the outside is also automatically enabled.

In the event of a panic situation, the latch and the engaged bolt are retracted simultaneously by actuating the exit device from the inside. After panic unlocking, the bolt remains withdrawn and can be locked again with the key.

A lever handle is fitted to the outside face. The door can be unlocked and the latch retracted using the lever handle.

Change-over function B

For doors in which passage from the outside may occasionally be necessary. The lever handle on the outside face may be engaged and disengaged. Opening of the door from the inside (danger side) is always possible.


In the event of a panic situation, the latch and the engaged bolt are retracted simultaneously by actuating the exit device from the inside. After panic unlocking, the bolt remains withdrawn and can be locked again with the key.

A lever handle is fitted to the outside face. The key can be used to retract the lock and engage the lever handle which can then be used to retract the latch. The lever handle remains engaged until the key is used to re-lock the door.

Lever handle spindles


The lever handle spindles included in the scope of supply of the PHA 2500 system are designed for door thicknesses of 50 – 60 mm or 60 – 70 mm. In the case of locks with functions D and B (split follower), a central lock fit is necessary for these lever handle spindles. In the case of door leaf

thicknesses outside the given ranges and/or an asymmetric lock fit, the corresponding lever handle spindle will need to be separately ordered. Please ensure that all the relevant drawing dimensions are indicated.

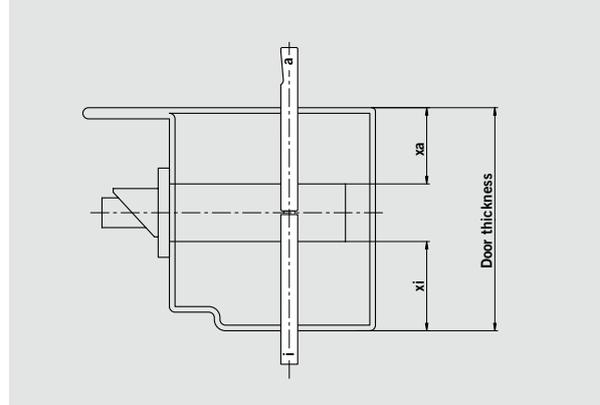

PHA 2500 with an electronic knob cylinder


Use of an electronic knob cylinder according to certificate of conformity 0432-BPR-0066 DORMA PHA 2500.

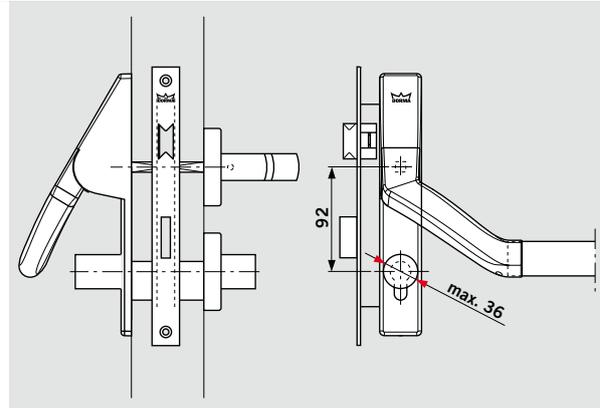


Door situation

It may be the case that the panic fitting cannot be installed on extreme door situations according to standard measurements (door width X smaller than


1000 mm in connection with the distance of the hinge Y bigger than 90 mm). On request DORMA will gladly give you installation suggestions.

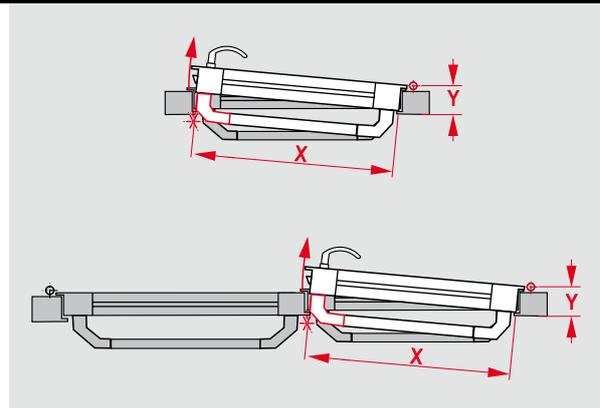

Lever handle fittings for narrow stile doors



8100 FS



8140 FS



8350 FS




8526 FS




8527 FS



8830 FS




8906 FS



8907 FS



8940 FS



8972 FS



8998 FS



8999 FS


Knobs for narrow stile doors



3020 FS



3548 FS



3548 V FS


For further lever handle fittings please refer to DORMA Premium brochure

Lever handles with narrow roses for use on narrow stile doors according to EN 1906, DIN 18273 and EN 1634-1 (for fire and smoke control doors).

For the combination with PHA 2500 system the 9 mm lever handle spindle has to be used.



Series Smoke

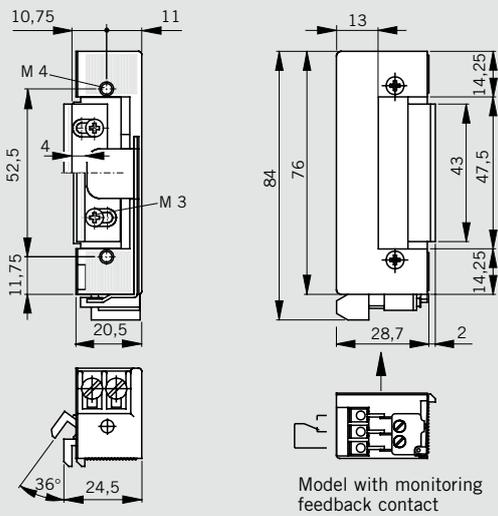

Specification text

DORMA Smoke safety electric strike for installation on smoke control doors, with adjustable latch, for over-rebated and flush-closing meeting stiles, non-handed.

Fail-secure


- 6–12 V AC/DC
- 12 V AC
- 12 V DC
- 24 V DC

- With status monitoring feedback



For detailed information see DORMA Electric Strikes brochure

Series Fire 447

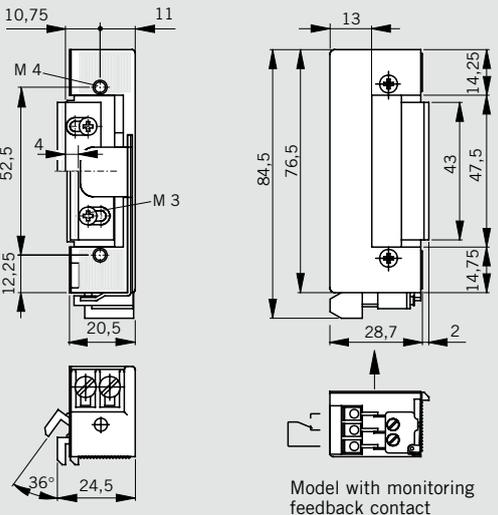

Specification text

DORMA Fire 447 safety electric strike for installation in any position on fire and smoke control doors, with adjustable latch, for over-rebated and flush-closing meeting stiles, non-handed.

Fail-secure


- 6–12 V AC/DC
- 12 V AC
- 12 V DC
- 24 V DC

- With status monitoring feedback



For detailed information see DORMA Electric Strikes brochure

Series Fire 442

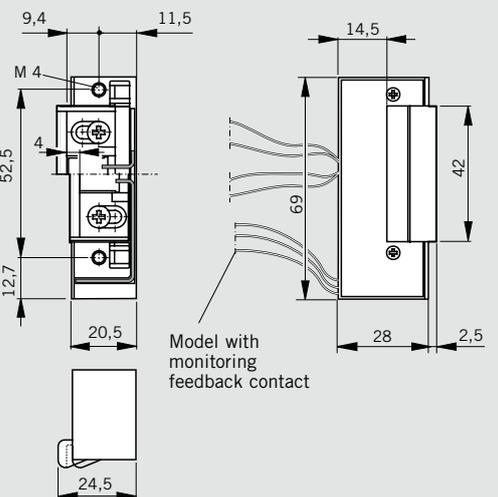

Specification text

DORMA Fire 442 safety electric strike for installation in any position on fire and smoke control doors, with adjustable latch, for over-rebated and flush-closing meeting stiles, non-handed.

Fail-secure

- 6–24 V AC/DC
- 12–48 V AC/DC
- 24–48 V AC/DC

- With status monitoring feedback




For detailed information see DORMA Electric Strikes brochure

Series	Voltage	Unlocking function (E)	Holding function (A)	Monitor contact	Typ (RR)	Order No.	
Smoke	6-12 V AC/DC					15117006	
				●	RR	15117906	
	12 V AC					15117011	
				●	RR	15117911	
	12 V DC 100% ED					15117012	
				●	RR	15117912	
Fire 447	24 V DC 100% ED					15117024	
				●	RR	15117924	
	Fail-secure	6-12 V AC/DC					15147106
					●	RR	15147506
		12 V AC					15147111
					●	RR	15147511
Fire 442	12 V DC 100% ED					15147112	
				●	RR	15147512	
	Fail-secure	24 V DC 100% ED					15147124
					●	RR	15147524
		6-24 V AC/DC bis 12 V 100% ED					15142106
					●	RR	15142506
Fail-secure	12-48 V AC/DC bis 24 V 100% ED					15142112	
				●	RR	15142512	
	24-48 V AC/DC 100% ED					15142124	
				●	RR	15142524	

Holding force: 10 kN

Contact rating: max. 48 V, 5 A

(RR model)

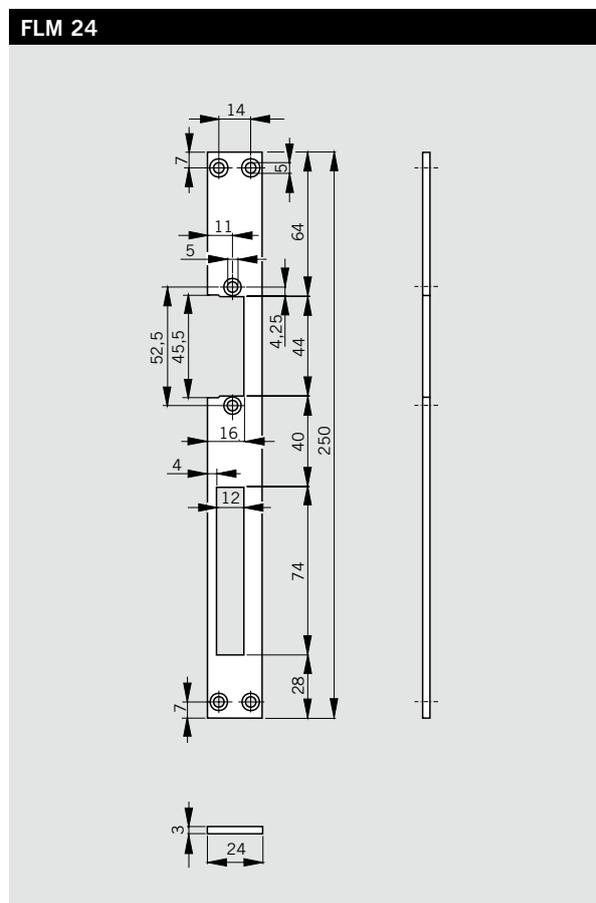

Flat strike plate of stainless steel, non-handed, for combination with DORMA electric strikes, Series Smoke, Fire 447 and Fire 442.

Order No. 15180224



Door Control



Automatic



**Glass Fittings
and Accessories**



**Security/Time
and Access (STA)**



Movable Walls

Door Control Division worldwide

Central Europe

DORMA GmbH + Co. KG
DORMA Platz 1
D-58256 Ennepetal
Tel. +49 2333 793-0
Fax +49 2333 793-495

Australasia

DORMA Door Controls Pty. Ltd.
46-52, Abbott Road
Hallam/Victoria 3803
Australia
Tel. +61 3979 63555
Fax +61 3979 63955

China/Hong Kong

DORMA Door Controls
(Suzhou) Co. Ltd.
No. 9, Hong Feng Road
Suzhou Singapore Industrial Park
Suzhou, 215021
P.R. of China
Tel. +86 512 67612481
Fax +86 512 67614582

DORMA Door Controls Pte. Ltd.

Room 701, Technology Plaza
651 King's Road
North Point
Hong Kong
Tel. +852 25034632
Fax +852 28875370

Emerging Markets

DORMA GmbH + Co. KG
DORMA Platz 1
D-58256 Ennepetal
Tel. +49 2333 793-0
Fax +49 2333 793-495

DORMA Door Controls (Pty.) Ltd.

Kings Court
4A Mineral Crescent
ZA-2000 Crown/Gauteng
South Africa
Tel. +27 11 8300280
Fax +27 11 8300291

Far East

DORMA Far East Pte. Ltd.
No. 31 Gul Lane
Singapore 629425
Tel. +65 6268 7633
Fax +65 6265 7995

France

DORMA France S.A.S.
Europarc
42, rue Eugène Dupuis
F-94046 Créteil
Tel. +33 1 41942400
Fax +33 1 41942401

Gulf

DORMA Gulf Door Controls FZE
Jebel Ali Free Zone South
Plot No. S 20135
Road No. SW 301 G
P.O. Box 17268
Dubai – United Arab Emirates
Tel. +971 4 8020400
Fax +971 4 8869100/8869101

North America

DORMA Architectural Hardware
DORMA Drive, Drawer AC
Reamstown, PA 17567-0411
Tel. +1 800 5238483
Fax +1 800 2749724

Scanbalt

DORMA Sverige AB
F O Petersons Gata 24
SE-421 31 Västra Frölunda
Tel. +46 31 289520
Fax +46 31 281739

South America

DORMA Sistemas de Controles
para Portas Ltda.
Av. Piracema, 1400
Centro Empresarial Tambore
CEP 06400-933 Barueri/
São Paulo, Brasil
Tel. +55 11 46899280
Fax +55 11 46899215

South-East Europe

DORMA AUSTRIA GmbH
Pebering Strass 22
A-5301 Eugendorf
Tel. +43 6225 284880
Fax +43 6225 28491

South Europe

DORMA Italiana S.r.l.
Via. Canova 44/46
I-20035 Lissone (MI)
Tel. +39 039 244031
Fax +39 039 24403310
DORMA Ibérica, S.A.
Camino San Martin de la Vega, 4
E-28500 Arganda del Rey
(Madrid)
Tel. +34 91 8757850
Fax +34 91 8757881

UK/Ireland

DORMA UK Ltd.
Wilbury Way
Hitchin
GB-Hertfordshire SG4 0AB
Great Britain
Tel. +44 1462 477600
Fax +44 1462 477601