



ED 100 ED 250

Swing door operators
in modular design

Swing door operators in modular design

With their ED 100 and ED 250 swing door operators, DORMA offers electro-mechanical swing door operators for various fields of application. Simply select the suitable version according to your prevailing door-leaf width and weight: While the ED 100 is suitable for doors with a weight of up to 100 kg and a door width of 1,100 mm, the ED 250 is designed for doors with a width of 1,600 mm and a door weight of 250 kg. Both operators may be installed as push-version with standard arm and as pull-version with slide channel.


Apart from the extended cover, DORMA also provides an easy-to-install integrated door coordinator. With the aid of the DORMA Upgrade Card, the system's functional range may be adapted to various door versions. The large scope of integrated functions furthermore ensures that the majority of possible applications may easily be realised.

Benefits:

- Flexible configuration: Customers only pay for the functions they actually require.
- Cheap transport and easy mounting thanks to the system's reduced weight.
- Low-noise application due to multi-stage gear.
- Elegant visual appearance: DORMA Contur design provides an operator height of only 70 mm.
- Various functions as standard.

Fields of application:

- For single- or double-leaf swing doors. Choose between the ED 100 and the ED 250 in accordance with your prevailing door-leaf width and weight.
- The pull-version with slide channel and the push-version with standard arm are suitable for application at fire and smoke doors.
- Thanks to its low- and full-energy version, the system is suitable to automate both rarely and heavily frequented internal and external doors.
- High torque for full-automatic swing doors with radar motion control.
- For interior and exterior doors.

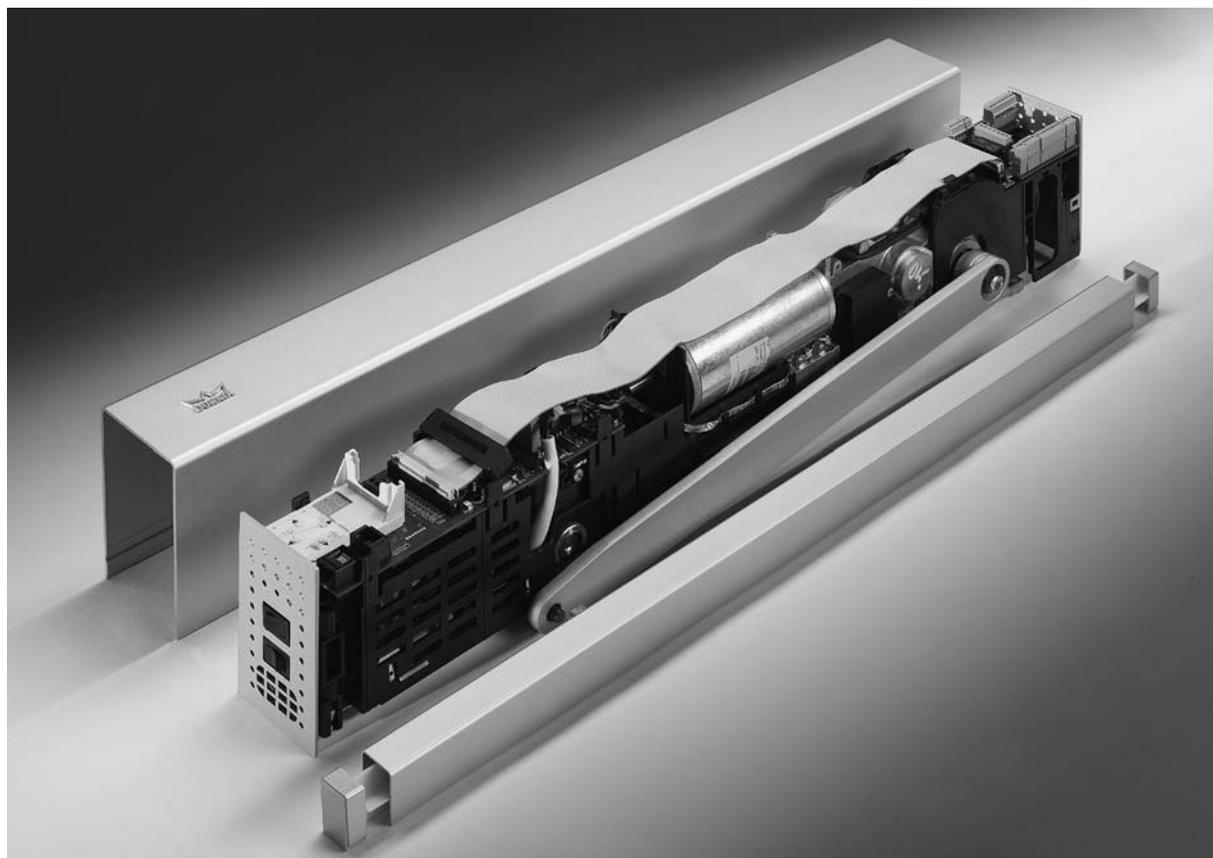

Required operating conditions	
Ambient temperature	-15 to +50 °C
Only suitable for dry environments	Relative humidity max. 93 % (non condensing)
Power supply	230 V AC 50 Hz +/- 10 %

General specifications	
Dimensions (W x H x D)	685 x 70 x 130 mm
Min. clearance between hinges (double-leaf systems)	1,400 mm
Min. clearance between hinges for ESR (double-leaf systems)	1,450 mm
Weight of single-leaf version	12 kg
Power supply for external accessories	24 V DC +/- 10 %, 1.5 A

Parameters	
Opening angle	Max. 110°
Latching action	Adjustable from 7° – 0°
Hold-open time	30 s, 180 s (optional)
Blocking behaviour	Reversing/Door closer function
Locking feedback contact	Motor lock
Wind load control	up to 150 N
Voltage-independent braking circuit	Adjustable via potentiometer
Electronic latching action pulse	Force adjustable

Integrated functions		
LED status indicator	green red yellow	– Operating voltage indicator – Malfunction indicator – Service interval indicator
Integrated program switch	OFF AUTOMATIC PERMANENT OPEN EXIT ONLY (only for single-leaf systems)	
User interface with information display	Status indicator and parameterisation	
Slot for DORMA Upgrade Cards	Extension of functional range	
Update interface	Firmware update	
TMP – Temperature Management Program	Temperature-related overload protection	
IDC – Initial Drive Control	Driving phase optimisation	
Cycle counter	0 – 1,000,000 (reasonably subdivided)	
Maintenance interval indicator	adjustable	
Push & Go Function	Door opens when moved manually by 4°	

Inputs, terminals max. 1.5 mm ²	
Potential-free activator	Inside and outside (NO contact)
Energised activator	8 – 24 V DC/AC + 10 %
Night-/Bank (key switch)	NO contact
Safety sensor	Hinge side and opposite hinge side (NC contact)
Test signal for safety sensor	Hinge side and opposite hinge side
Emergency-Off pushbutton/ Lock switch	NC contact

Outputs, terminals max. 1.5 mm ²	
Potential-free door status contact, alternatively	Door closed
	Door open
	Malfunction

ED 100	
Power consumption	120 Watts
Closing force EN 1154	EN 2–4, adjustable
Max. door-leaf weight for lintel depths of up to 300 mm	100 kg
Door-leaf width	700–1,100 mm
Max. opening speed	**50° (27°*)/second
Max. closing speed	**50° (27°*)/second
Axle extension	30 mm/60 mm
Lintel depth for slide channel	+/- 30 mm
Lintel depth for standard arm	0–300 mm

ED 250	
Power consumption	240 Watts
Closing force	EN 4–6, adjustable
Max. door-leaf weight for lintel depths of up to 300 mm	250 kg
Max. door-leaf weight for lintel depths from 301 mm to 500 mm	120 kg
Door-leaf width	700–1,600 mm
Door-leaf width for fire protection doors (push-version)	1,400 mm
Door-leaf width for fire protection doors (pull-version)	1,100 mm
Max. opening speed	60° (27°*)/second
Max. closing speed	60° (27°*)/second
Axle extension	30/60 mm
Lintel depth for slide channel	+/- 30 mm
Lintel depth for standard arm	0 – 500 mm

* The values in brackets indicate the maximum speed in Low-Energy Mode without Full-Energy or Fire Protection Upgrade Card.

** Depending on the door leaf weight, it is limited automatically in accordance with DIN 18650, BS 7036-4 and ANSI 156.19.

View: BASIC cover, pull-version, 12.5 mm pivot pin




Standard axle extension

View: BASIC cover, pull-version, 25 mm pivot pin




Standard axle extension

View: BASIC cover, push-version

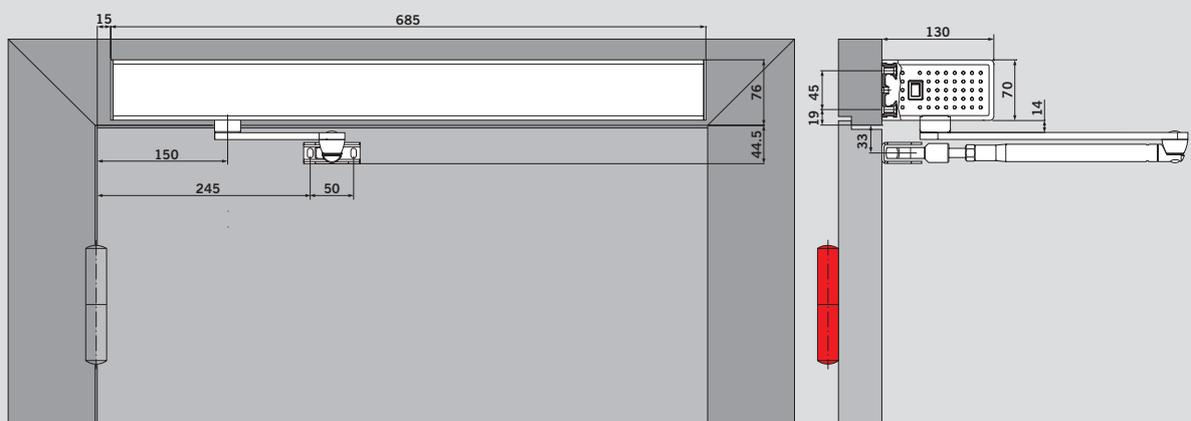


Standard axle extension


Drilling template: BASIC cover, pull-version, 12.5 mm pivot pin

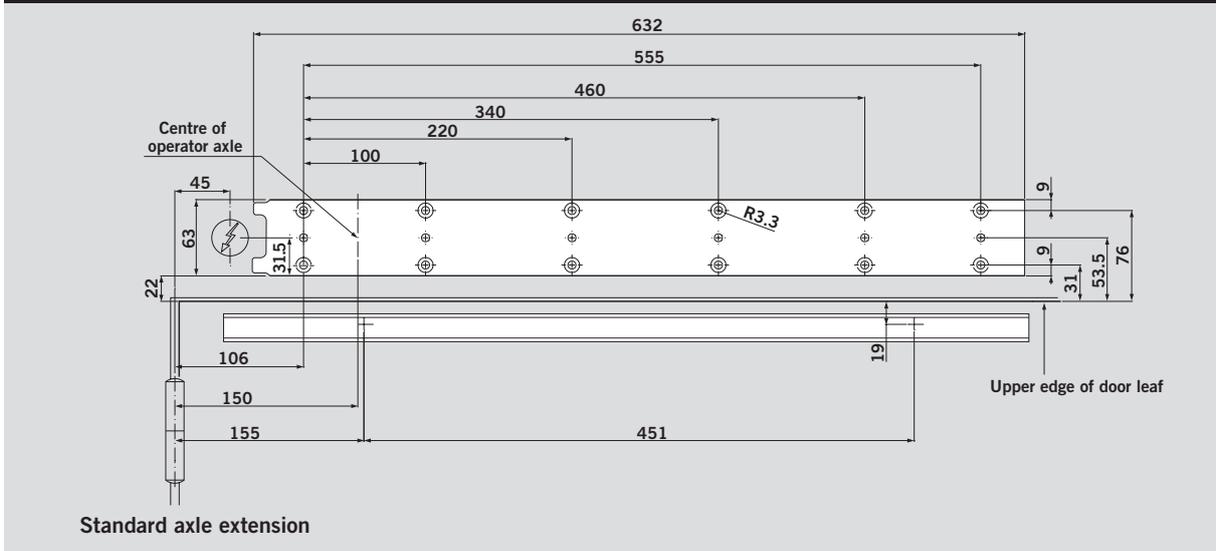


Drilling template: BASIC cover, pull-version, 25 mm pivot pin

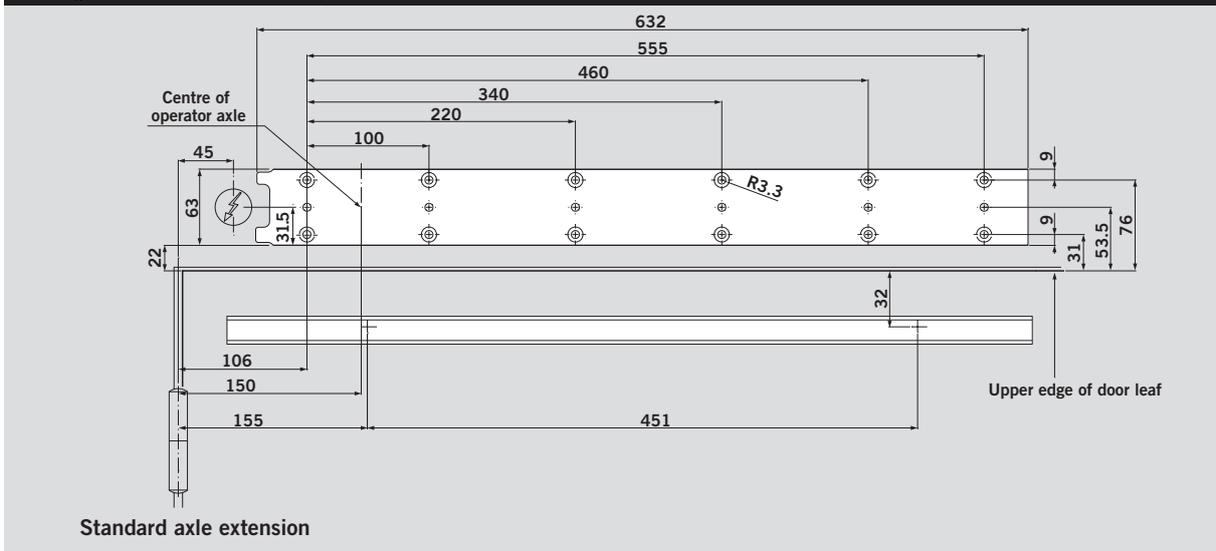

Drilling template: BASIC cover, push-version

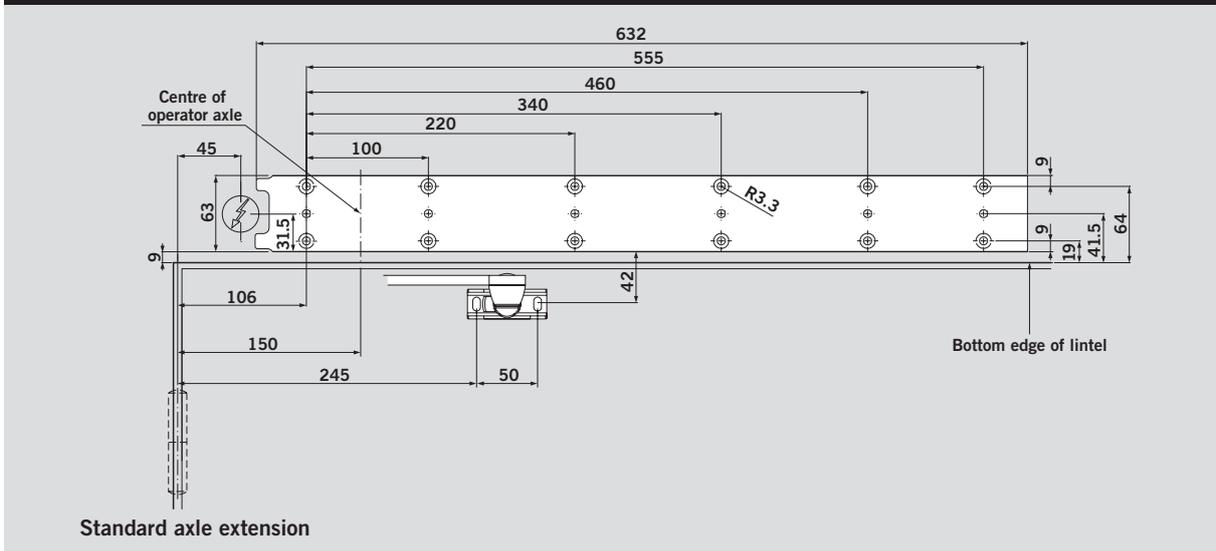


View: PROFESSIONAL cover, pull-version, 12.5 mm pivot pin

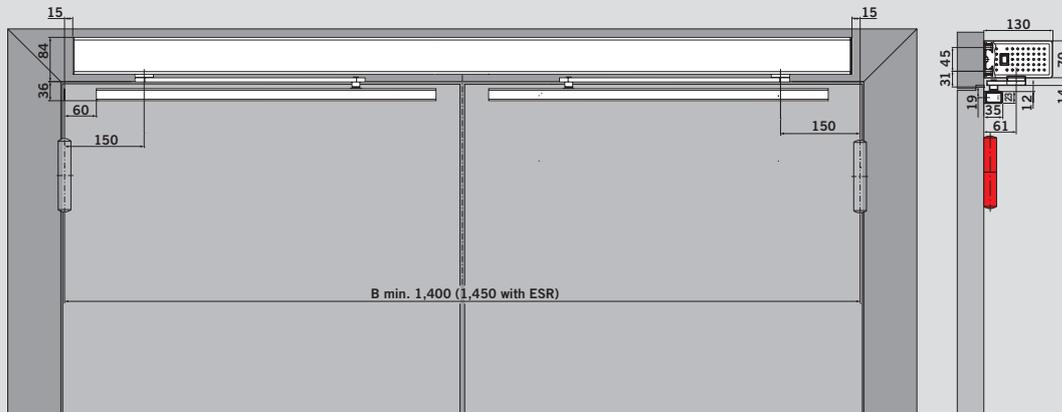


Standard axle extension

View: PROFESSIONAL cover, pull-version, 25 mm pivot pin

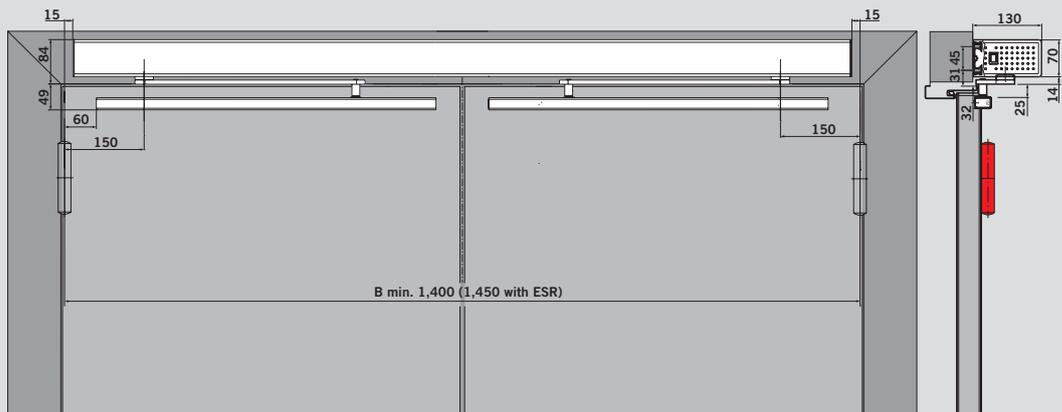


Standard axle extension

View: PROFESSIONAL cover, push-version

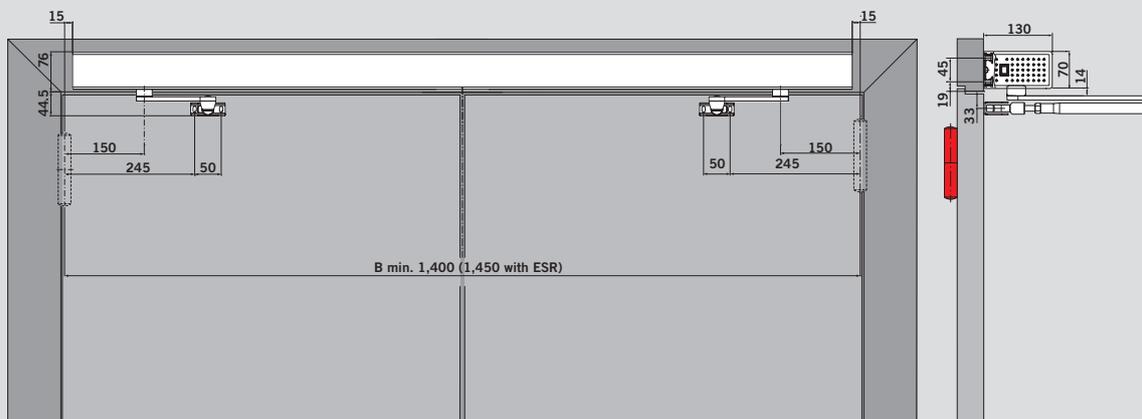


Standard axle extension

Drilling template: PROFESSIONAL cover, pull-version, 12.5 mm pivot pin

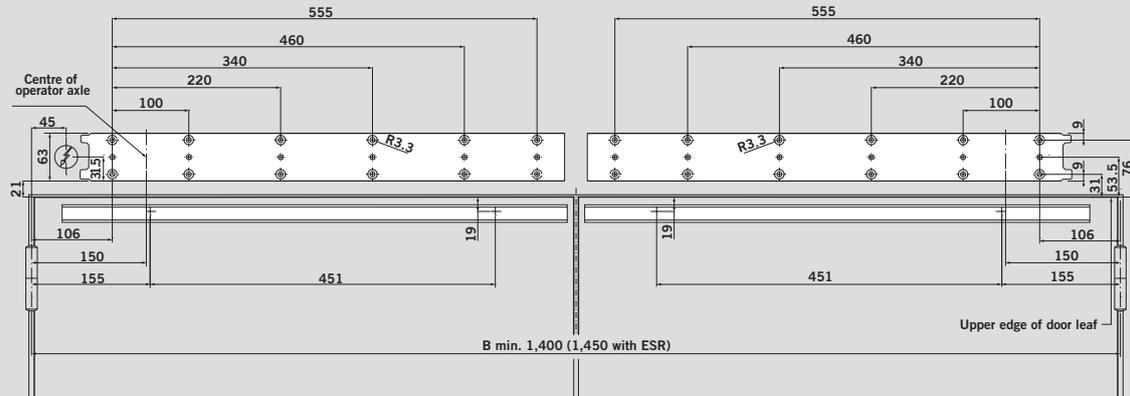


Standard axle extension
The cable entry may be realised on the left or on the right side.

Drilling template: PROFESSIONAL cover, pull-version, 25 mm pivot pin

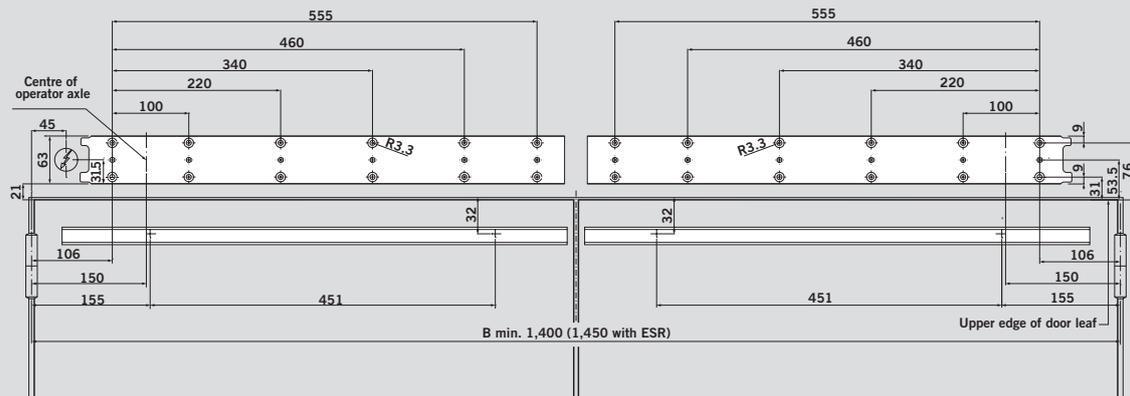


Standard axle extension
The cable entry may be realised on the left or on the right side.

Drilling template: PROFESSIONAL cover, push-version

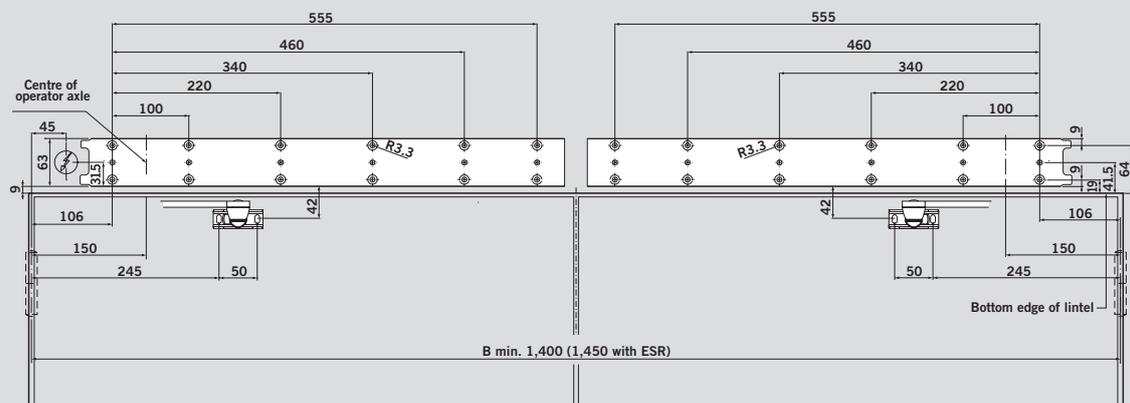

Standard axle extension
The cable entry may be realised on the left or on the right side.

System setup

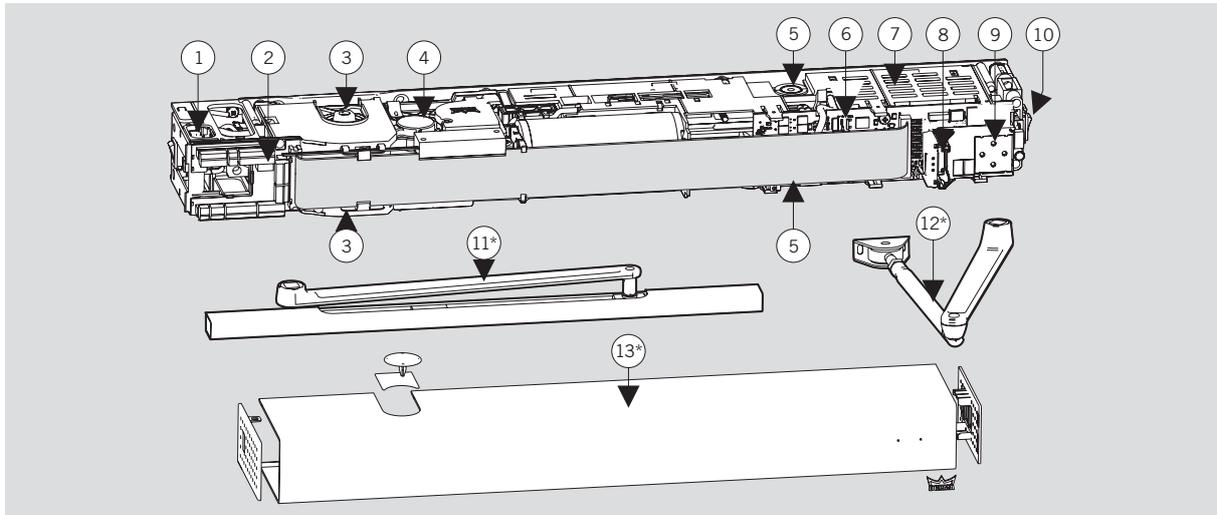

The example system is equipped with all available components.
It is selected in accordance with the door-leaf width and the door-leaf weight.

- | | | | |
|------------------------------------|-------------------------------|---|----------------------|
| ① Mains connection | ⑤ Adjustment of closing force | ⑧ Slot for DORMA Upgrade Cards | ⑫ Standard arm* |
| ② Connection unit | ⑥ Control unit | ⑨ User interface with information display | ⑬ Complete cover* |
| ③ Axle connection on both sides | ⑦ Switching power supply unit | ⑩ Internal program switch | |
| ④ Drive system (motor/gear/spring) | | ⑪ Slide channel (set)* | *supplied separately |

Article No.

ED 100 swing door operator 230 V	29222301
ED 250 swing door operator 230 V	29202301

Momentenübersicht

Way of mounting	Lintel mounting on hinge side with slide channel (pull-version)		Lintel mounting on opposite hinge side with slide channel (pull-version)	
	minimum	maximum	minimum	maximum
Closing force EN 1154	EN 2	EN 4	EN 2	EN 4
Manual closing torque (Nm)	13	34	13	37
Closing torque in AUTOMATIC mode (Nm)*	20	FE: 150/LE: 67	20	FE: 150/LE: 67
Manual opening torque (Nm)*	30	50	35	55
Opening torque in AUTOMATIC mode (Nm)*	20	FE: 150/LE: 67	20	FE: 150/LE: 67

Way of mounting	Lintel mounting on hinge side with slide channel (pull-version)		Lintel mounting on opposite hinge side with slide channel (pull-version)	
	minimum	maximum	minimum	maximum
Closing force EN 1154	EN 4	EN 6	EN 4	EN 6
Manual closing torque (Nm)	26	65	26	70
Closing torque in AUTOMATIC mode (Nm)*	20	FE: 150/LE: 67	20	FE: 150/LE: 67
Manual opening torque (Nm)*	55	85	60	90
Opening torque in AUTOMATIC mode (Nm)*	20	FE: 150/LE: 67	20	FE: 150/LE: 67

FE = With Full-Energy or Fire Protection Upgrade Card

LE = Low-Energy standard operator without upgrade card

* = The torque is available as soon as the door has performed an automatic opening cycle following one of the activators or the Push & Go Function has been triggered. Parameter **HD** must be adjusted to **0!**

Wind load control

ED 100 and ED 250 operators are especially suitable for application at exterior doors that are subject to varying wind loads and for interior doors separating rooms where different pressure prevails.


While the system is in AUTOMATIC mode, the wind load control monitors the driving speed and adjusts the speed correspondingly if it exceeds or falls below the adjusted value.

In conjunction with the Full-Energy Upgrade Card, the operator provides a force of up to 150 N at the main closing edge – which is then used to compensate environmental influences.

The electronic latching action is activated during the last 5° of the closing cycle in order to support the closing action.

Arm

ED slide channel set – pull-version

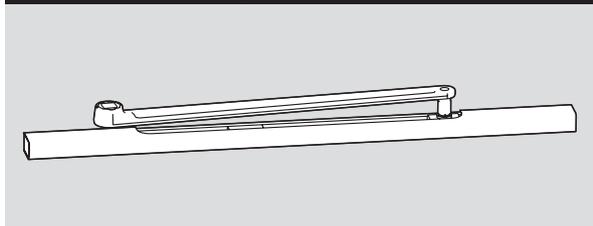


The slide channel set is suitable for doors with a weight of up to 250 kg; however, the admissible door-leaf width of 1,100 mm for the ED 100

and 1,600 mm for the ED 250 must not be exceeded. The maximum lintel depth amounts to +/- 30 mm.

Article No.

ED slide channel set (silver-coloured)	29275001
ED slide channel set (white)	29275002
ED slide channel set (special colour)	29275003

ED standard arm 225 – push-version

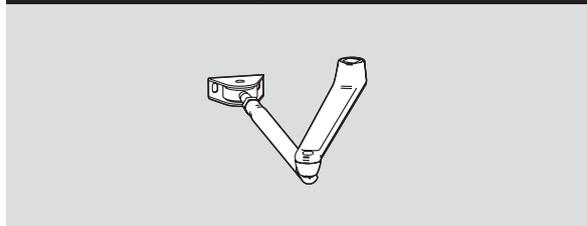

The standard arm 225 is suitable for lintel depths of up to 225 mm and a maximum door-leaf weight of 250 kg; however, the admissible door-leaf width of 1,100 mm for the ED 100


and 1,600 mm for the ED 250 must not be exceeded.

**ED 100 und ED 250:
For lintel depths from
0 to 225 mm**

Article No.

ED standard arm 225 (silver-coloured)	29271001
ED standard arm 225 (white)	29271002
ED standard arm 225 (special colour)	29271003

ED standard arm 500 – push-version

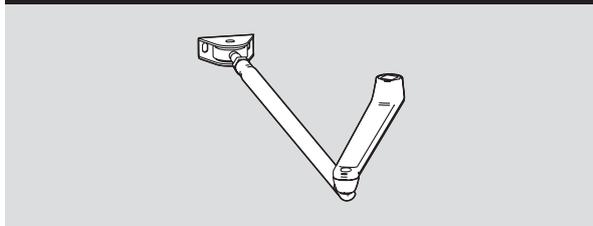

The standard arm 500 is designed for lintel depths from 226 to 500 mm. The ED 100 is suitable to realise a maximum lintel depth of 300 mm, while the ED 250 is tailored to larger lintel depths. If the lintel depth exceeds 301 mm, a door-leaf weight

of 120 kg must not be exceeded.


**ED 250
For lintel depths from 226 to
500 mm**

**ED 100
For lintel depths from 226 to
300 mm**

Article No.

ED standard arm 500 (silver-coloured)	29272001
ED standard arm 500 (white)	29272002
ED standard arm 500 (special colour)	29272003

ED axle extensions

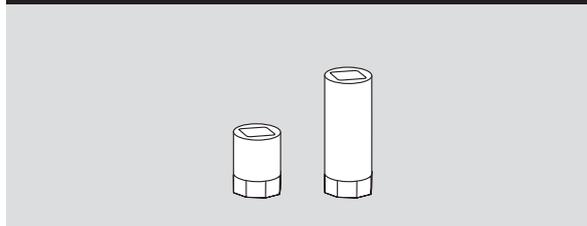

The axle extensions are suitable for all arm versions of the ED 100 & ED 250.

The ED axle extensions are available in chromated black.

Article No.

ED axle extension 30 mm	29278001
ED axle extension 60 mm	29278101

Covers


The operator covers are packed separately from the operator system, which makes it easy to select the respectively required cover. DORMA provides covers for single- and double-leaf systems. All covers are

designed for on-site mounting and realised in DORMA Contur design. They are furthermore suitable for both the ED 100 and the ED 250 version. When creating double-leaf systems, the four-position

internal program switch has to be replaced by a three-position switch, which means that the EXIT ONLY function is only available in combination with the external program switch. Double-leaf systems are required for

doors where the clearance between the hinges exceeds 1,400 mm (1,450 mm with ESR).


ED BASIC cover – Aluminium cover for single-leaf swing door systems

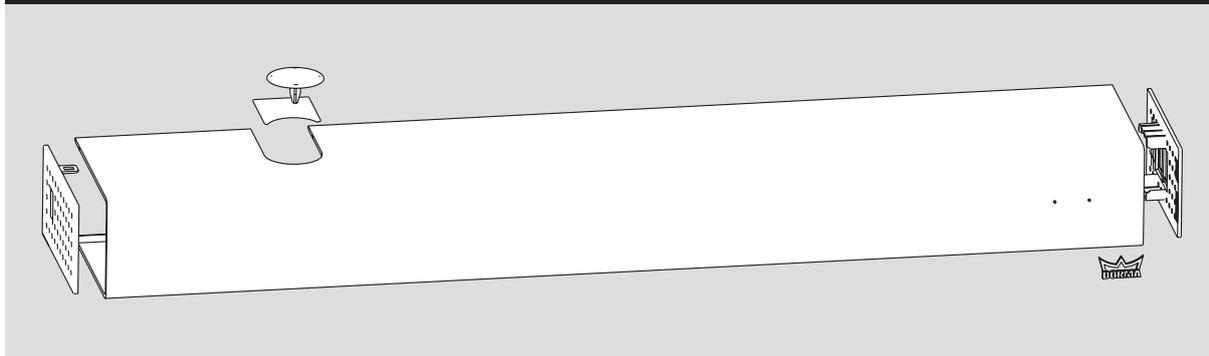

Article No.

ED BASIC cover (silver-coloured)	29241001
ED BASIC cover (white)	29241002
ED BASIC cover (special colour)	29241003

ED VARIO cover

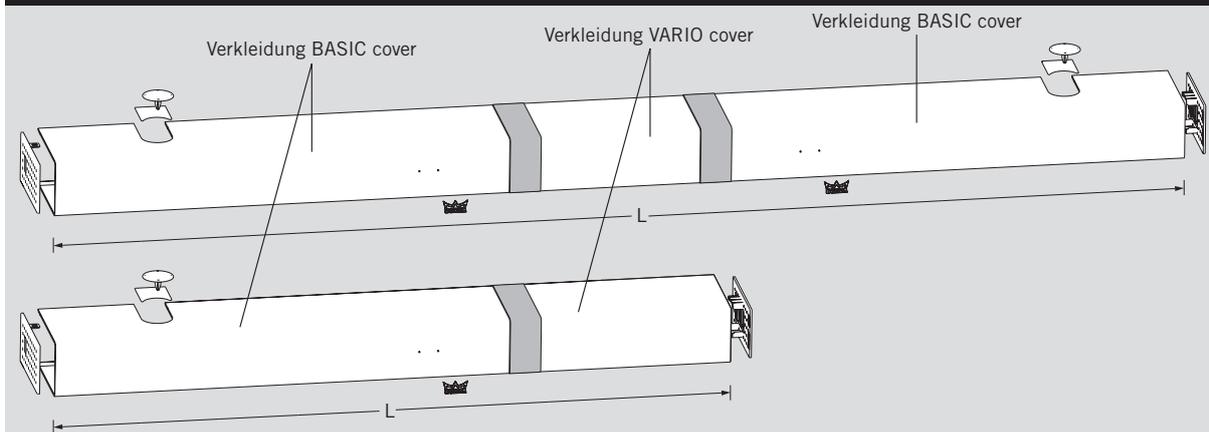

This aluminium cover is designed to create a continuous cover for double-leaf swing door systems. In addition to the VARIO cover, you will require two ED BASIC covers, which are mounted

on the right and on the left of the operator system. The ED VARIO cover is designed to hide the gap between the two covers and may be sawed to the appropriate size on site. With the aid of

the VARIO cover, you may also increase the length of single-leaf operators. The cover may be installed on the left or on the right side and can be sawed to the appropriate size on site.

The VARIO cover is silver-coloured and available in two versions.

Article No.

ED VARIO cover, 2,200 mm (silver-coloured)	29242001
ED VARIO cover, 2,800 mm (silver-coloured)	29242002


double-leaf version

1,500 mm – 2,200 mm
1,500 mm – 2,800 mm

single-leaf version

800 mm – 1,600 mm
800 mm – 1,600 mm

ED PROFESSIONAL cover

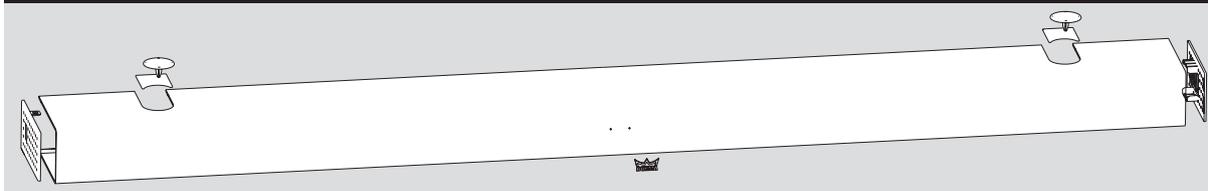

This aluminium cover is designed to create double-leaf swing door systems. The ED PROFESSIONAL

cover is a continuous and seamless cover and available in lengths from 1,400 mm (1,450 mm with ESR) to

3,200 mm. With the PROFESSIONAL cover, also single-leaf operators may be extended to a

length of up to 3,000 mm towards the main closing edge.

Article No.


ED PROFESSIONAL cover (silver-coloured or as special colour) 29243003

DORMA Upgrade Cards

DORMA Upgrade Cards are designed to increase the functional range of our swing door operators. The installation of the cards is very easy: Just insert the respective Upgrade Card

into the proper slot at the control unit and the software will be transferred automatically. DORMA offers different Upgrade Cards, which may either be combined or installed as individual

components. Please note that the respective function of the Upgrade Card is only available as long as the card is connected to the control unit.

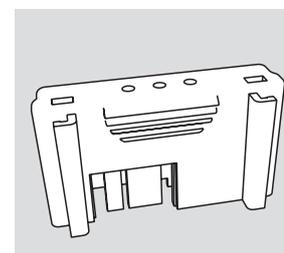

Upgrade Card Full-Energy – blue

All operator systems are supplied as Low-Energy version, which means that the adjustable opening and closing speed range is restricted to a certain limit. The respective limits depend on the prevailing door-leaf width and door-leaf weight and may vary between 1° and 27° per second. These limits furthermore comply


with DIN 18650 (German Industrial Standard), ANSI 156.19 (American Standard) and BS 7036 (British Standard). Depending on their field of application, such swing door operators might not require safety sensors when operated in Low-Energy Mode. If you need a higher driving speed, you will require the respective

Full-Energy Upgrade Card. The driving speed may then be increased to a maximum of 50°/second with the ED 100 and to 60°/second with the ED 250. In this case the swing path has to be monitored by safety sensors (mounted onto the door leaf).

Article No.

ED Upgrade Card Full-Energy
ED 100 29251022
blue
ED Upgrade Card Full-Energy
ED 250 29251020
blue/transparent

Recommended weight/dimensions for the installation of the Full-Energy Upgrade Card

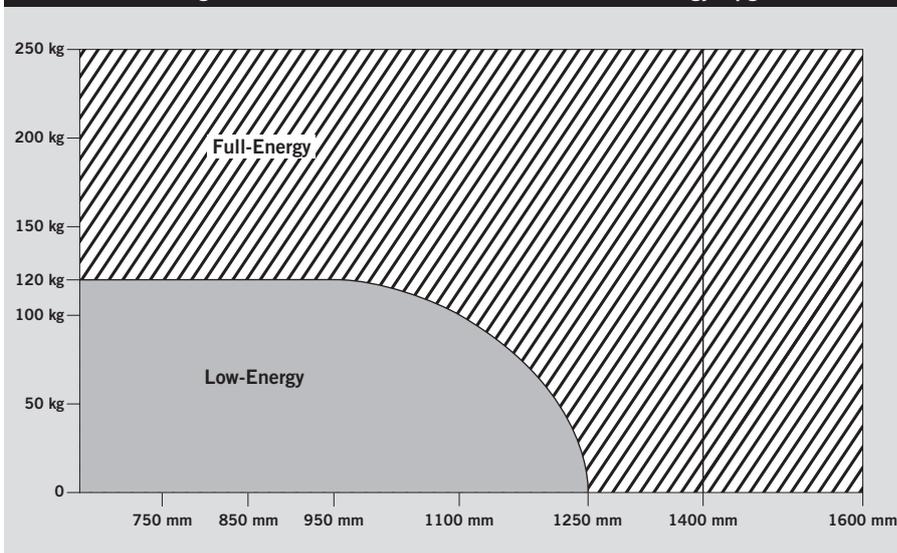

Upgrade Card Fire Protection ED 100 – red

When the ED 100 is installed at fire and smoke doors with application in preventive fire protection, the Upgrade Card Fire Protection is required for compliance with the guidelines for hold-open devices. Apart from its smoke detector connection (as monitored current loop), the card also offers a manual reset function (by opening the door), a full-energy function and the system may be triggered at the door leaf.

Thanks to the card's integrated full-energy function, no additional Full-Energy Upgrade Card is required.

Manual reset by opening the door

A triggered hold-open system has to be reactivated manually. As soon as the function has been activated, it suffices to open the door until it has almost reached the adjusted opening width.

Triggering at door leaf

It must be possible to trigger a hold-open device manually in order to close the door – for example with the aid of a manual release push-button with “Tür schließen” (German for “close door”) lettering. However, you do not require the manual release pushbutton as long as the system may be triggered (closed) by pushing the door leaves in closing direction.

Article No.

ED Upgrade Card Fire Protection	
ED 100	29252022
red	
ED 250	29252020
red/transparent	

Upgrade Card Professional

The Upgrade Card Professional provides functions for swing door operators that used to be realised with the aid of external components.

– Extended hold-open time of 180 s

The hold-open time of up to 30 seconds, which is already integrated in the basic system, is sufficient for most applications.

However, an extended hold-open time of up to 180 seconds may easily be realised with the aid of the Full-Energy Upgrade Card.

– Flip-Flop-Function

In standard mode, the operator opens the door after a Night-/Bank pulse has been triggered (via the key switch) and closes it on expiry of the hold-open time. When the flip-flop-function is activated, the door opens and remains in

PERMANENT OPEN position as soon as the Night-/Bank function is triggered at the respective input. The door will close when the Night-/Bank function is activated again. The hold-open period in PERMANENT OPEN position is not limited, and the standard hold-open time is available at all other activator inputs. Please note that smoke detectors always have priority to the PERMANENT OPEN function.

– Nurse-Bed-Function (only for double-leaf door systems)

As soon as a pulse is triggered, both door leaves of the double-leaf system will open.

Sometimes this may not be necessary, as the full passage width is not required.

Whenever this is the case, the Nurse-Bed-Function is perfectly suitable to control the two door leaves separately.

The activator that is connected to the external detector only institutes the active door leaf to open.

The resulting passage width is sufficiently big to allow people to use the door.

The other activator (the one that is connected to the internal detector) is used to open the door to the full opening width. In this case, both door leaves open so that the full passage width is accessible.

This function reduces the energy consumption and may help to avoid draughts and thus heat loss.

Article No.

ED Upgrade Card Professional	
ED 100/ED 250	29253001
green	

Upgrade Card DCW

The Upgrade Card DCW provides the operator with a DCW Bus connection. The integrated DCW driver supports the following accessory:

– Emergency exit motor lock with self-locking action DORMA SVP DCW

The required procedure is controlled by the operator while the operator and the motor lock communicate via the DCW bus.

– ST 32 DCW

The key switch to trigger the Night-/Bank function is suitable for application as activator outside the secured area (if you turn the key clockwise).

When the key switch is used in conjunction with the DCW program switch: the program switch is adjusted to OFF by turning the key counter-clockwise in order to deny access

after closing of business or during work breaks. Turn the key to the right for more than 3 seconds in order to trigger the AUTOMATIC function.*

* Depending on regional standards, provisions and regulations regarding the safeguarding of buildings, further measures to shut off the building may be required.

Article No.



ED Upgrade Card DCW	
ED 100/ED 250	29254001
yellow	

Functional characteristics

In the event of a fire, the ceiling-mounted or lintel-mounted smoke detectors detect emitted smoke and deactivate the automatic opening of the door. In this case, the operator will close

the door via the integrated spring and can no longer open it automatically. Apart from the automatic activation via smoke detector, the system may also be triggered manually via the optional

manual release pushbutton or when the door is closed by hand. In order to reactivate the system, the door has to be opened manually.

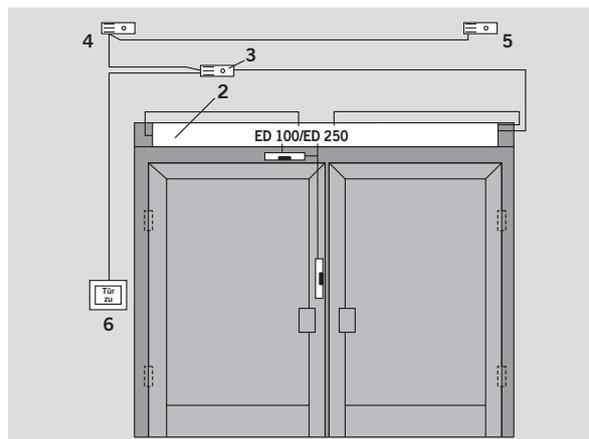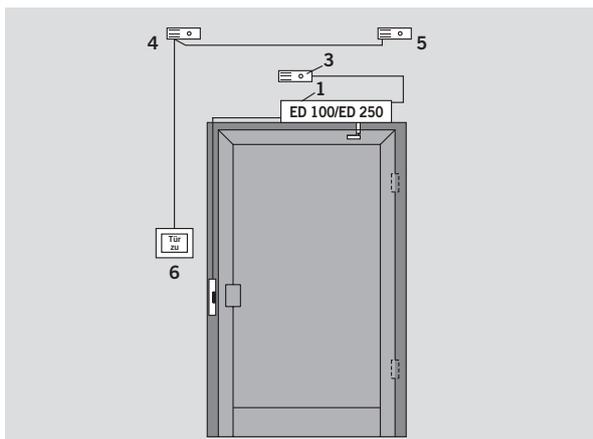


- 1 ED 100/ED 250
- 2 ED 100/ED 250 with continuous cover
- 3 RM-ED smoke detector

- 4 RM smoke detector, opposite hinge side
- 5 RM smoke detector, hinge side


- 6 Optional manual release pushbutton "Tür zu" (German for "close door")

DORMA RM-ED lintel-mounted smoke detector

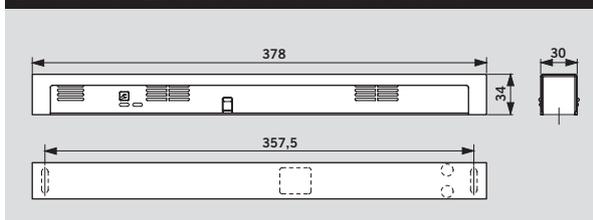


- RM-ED (silver-coloured) Article No. 64840001
- RM-ED (white) Article No. 64840011
- RM-ED (special colour) Article No. 64840009

DORMA RM-N ceiling-mounted smoke detector

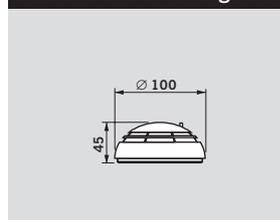

white
Article No. 64830000

DORMA HT manual release pushbutton

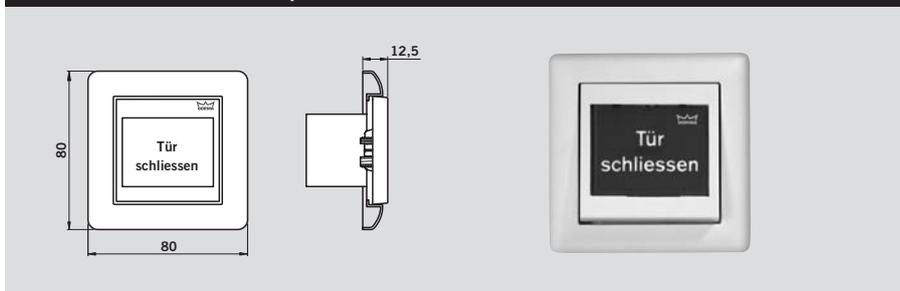

Flush-mounted version

white
Article No. 19144601175

Box for surface-mounting for DORMA HT

Article No. 05158533332
(No picture)

ESR – Integrated door coordinator

The ESR set is installed inside the double-leaf operator on site. It is available as individual component and easy to install. The system



works similar to a drum brake and thereby ensures the proper functioning of the system. Its brake works on the motor shaft of the

operator on the active door leaf and transfers the switching signal via a shaft. The system does not require any maintenance.

Article No.
ED ESR Set 29261001

Connections

- 1 Power supply
- 2 Emergency pushbutton, function: Emergency Off
- 3 Two-pole-and-earth socket
- 4 External PGS, mechanical
- 5 External PGS, electronic
- 6 Pushbutton, inside
- 7 Pushbutton, outside
- 8 Locking device
- 9 Radar motion detector, inside
- 10 Radar motion detector, outside
- 11 Key switch
- 12 ED 100/ED 250
- 13 ED 100/ED 250 with continuous cover
- 14 RM-ED smoke detector
- 15 RM-N smoke detector, opposite hinge side
- 16 RM-N smoke detector, hinge side
- 17 Optional manual release pushbutton "Tür zu" (German for "close door")

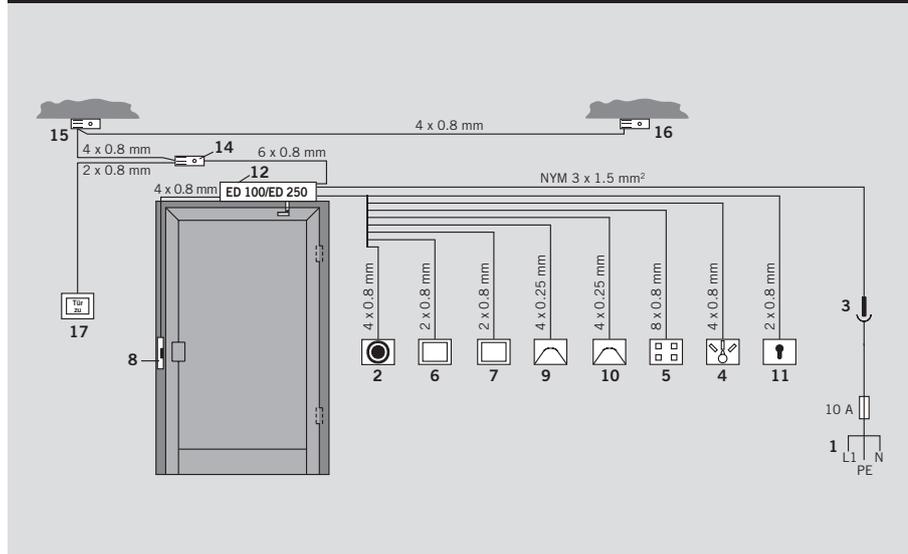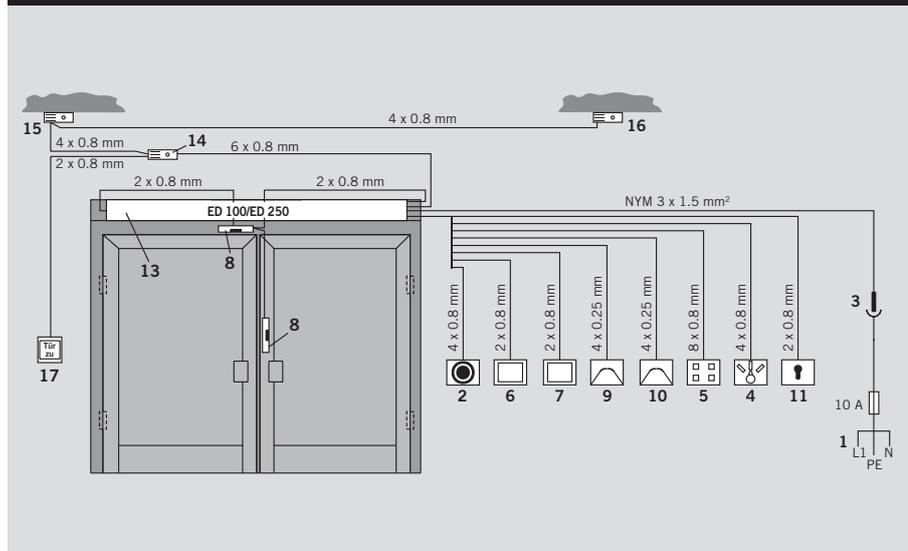
ED 100/ED 250, single-leaf doors**ED 100/ED 250, double-leaf doors**

Program switches

External program switches are available in different designs and have been conceived for all kinds of demands. They offer various options, from a mechanical to a full-electronic

version, alternatively also lockable via Euro profile half-cylinder or in a full-electronic way via code. These switches are designed to replace the internal program switch.

Mechanical

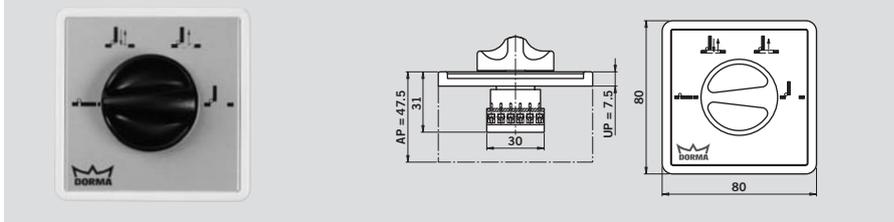


Program switch

4-position, aluminium, white, flush-mounted version, Gira S-Color

Article No. 19135404150
Box for surface-mounting: 5080531332

Mechanical and lockable

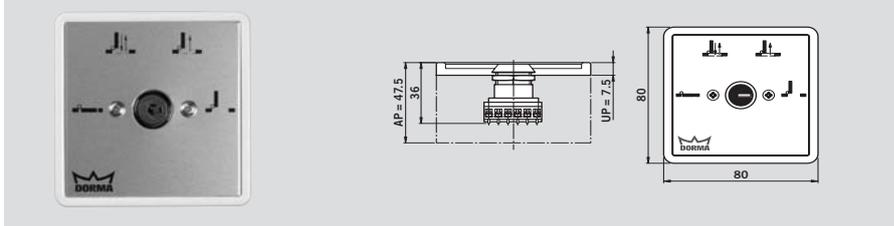


Program switch

4-position, lockable, aluminium, white, flush-mounted version, Gira S-Color

Article No. 19135604150
Box for surface-mounting: 5080531332

Electronic

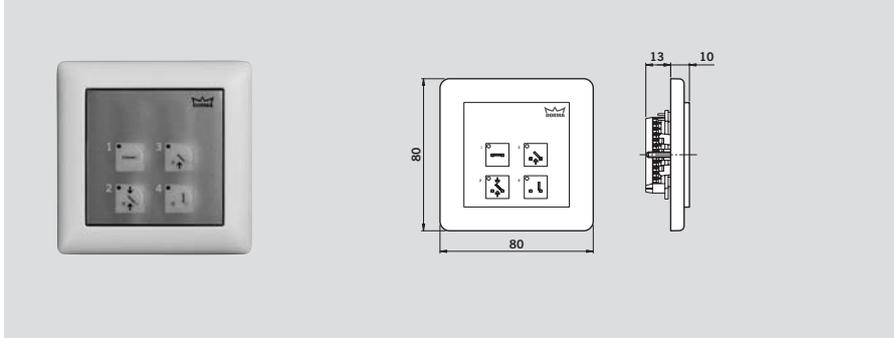


Full-electronic program switch

In System 55 design, 4-position, lockable via code or additional TL-ST S55 key switch, membrane keypad, aluminium-coloured, white, flush-mounted version

Article No. 16557001150
Box for surface-mounting: 5158533332

Mechanical with Euro profile half-cylinder

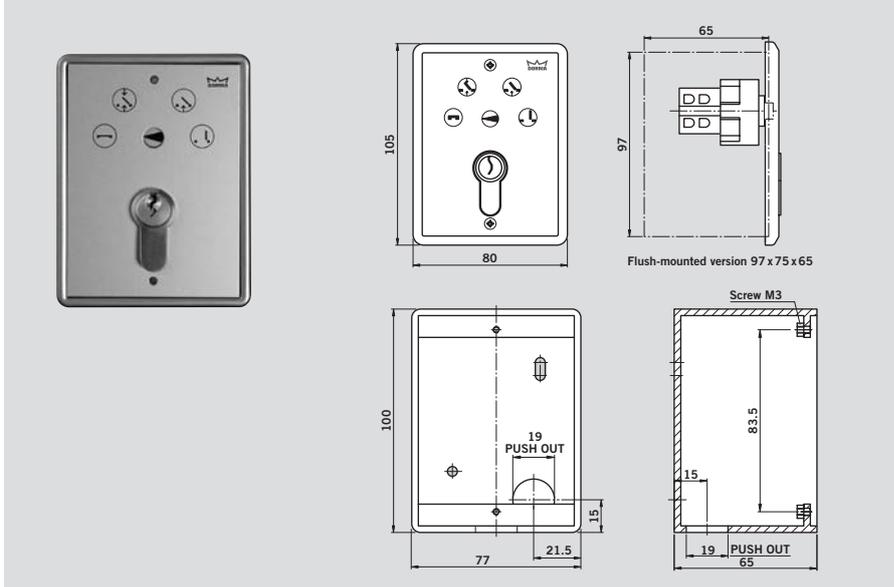


Program switch

4-position, lockable via Euro profile half-cylinder, white, flush-mounted version

Article No. 19141801170
Box for surface-mounting: 19142201170

Pushbuttons

Pushbutton

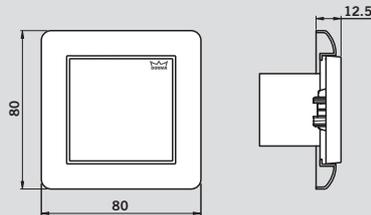

Pushbutton



Single-pole changeover contact, standard frame, white, flush-mounted version, System 55

Article No. 19144701170

Key switches



KT 3-1
Surface-mounted version
Flush-mounted version

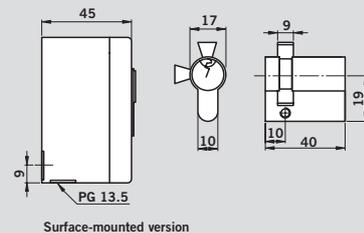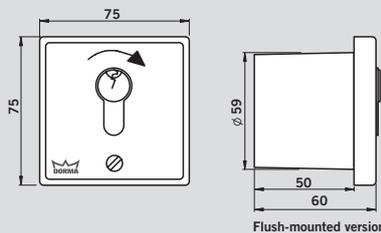

Key switch KT 3-1

1 NO contact, with Euro profile half-cylinder (may be replaced by any standard Euro profile half-cylinder), key only retractable in neutral position, aluminium, metal, 75 x 75 x 60 mm

KT 3-1, flush-mounted version
Article No. 05054531332

KT 3-1, surface-mounted version
Article No. 05054631332




KT 8
Surface-mounted version
Flush-mounted version

ST 32 tamper-proof key switch with LED display

Silver-coloured aluminium cover with face plate, suitable for flush- and surface-mounting, to lock/unlock the door system from the outside
Approximate dimensions of housing (W x H x D):
75 x 75 x 67 mm
Face plate (flush-mounted):
90 x 100 x 2 mm
Article-No. 56043201

Large-sized pushbutton (elbow)

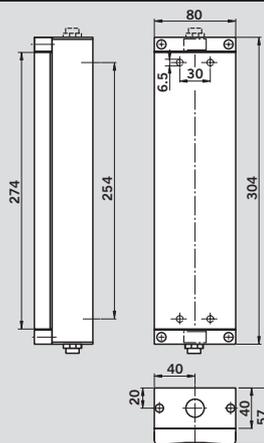


Large-sized pushbutton (elbow)

Flush-mounted version/
surface-mounted version,
electrical, silver-coloured,
304 x 80 mm

Article No. 90410015

Large-sized pushbuttons (elbow)

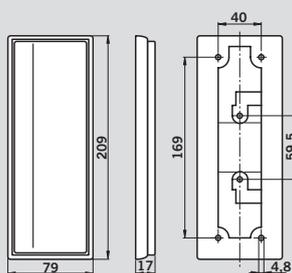


Large-sized pushbutton (elbow)


Surface-mounted version, extra-flat design, plastic, grey, 209 x 79 x 17 mm

Article No. 05080231332

Large-sized pushbuttons

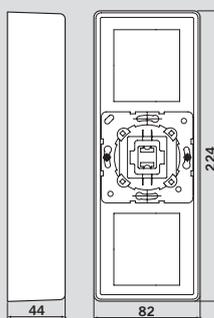

Surface-mounted version

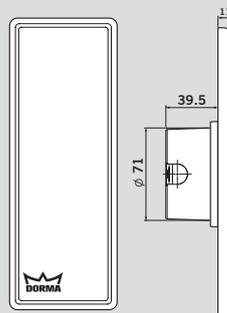

Flush-mounted version

Large-sized pushbutton

With box for flush-mounting, without switch pad, incl. switch, 224 x 82 mm
Article No. 05095531332

Large-sized pushbutton

With box for surface-mounting, without switch pad, incl. switch, paint box for surface-mounting (silver-coloured), 224 x 82 x 44 mm
Article No. 05095231332

Switch pad

Stainless-steel, suitable for surface-mounted version/ flush-mounted version, 214 x 70 mm
Article No. 05095431332

Switch pad

Stainless-steel, suitable for surface-mounted version/ flush-mounted version, 214 x 70 mm, lettering "Tür auf" (German for "open door")
Article No. 05095331332 (No picture)

CT 4/1 code keypad as control for locking devices (keypad and electronic module have to be combined)



The code keypad does not require optional software for simple access authorisations. The water resistant metal keypad is also suitable for installation in the exterior of a building. Thanks to Plug&Play, the 4- or 6-digit code may be changed directly with the aid of the keypad. The respective control unit is installed within the security zone and may be connected to all DORMA operators.
Surface-mounted version, 230 V/50 Hz, 1.5 V A, 1 x UM potential-free relay contact 8 A, 250 V, connections: max. 2.5 mm, 75 x 75 x 11.5 mm

MTB 4/1 metal keypad

to enter the activation code (to open the door) and for programming purposes, surface-mounted version 75 x 75 x 11.5 mm

Article No. 05079331332

EB 4/1

Electronic module, incl. 2 m connection cable, plastic cover, black, surface-mounted version

Article No. 05063431332

DORMA BRC remote system


The new DORMA BRC system operates with a bi-directional BidCoS wireless protocol. In contrast to unidirectional systems, the receiver sends a message to the hand-

held transmitter that the signal has been received. The hand-held transmitter indicates the prevailing status via a LED. Thus a short keystroke is enough

to trigger an opening pulse in a reliable way within the system's typical field range of 100 meters. The BRC-W and BRC-T transmitters are also of bi-directional design;

however, the status indicator is not visible as the transmitters are integrated in pushbuttons.

BRC-R

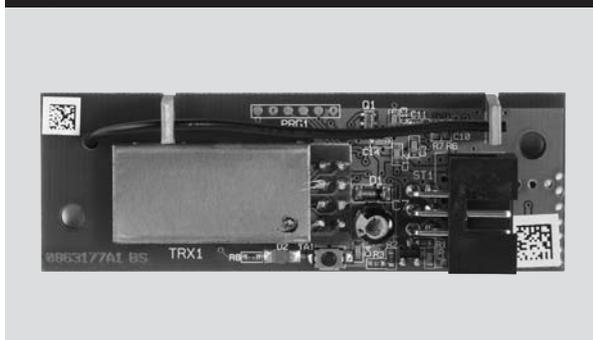

The new DORMA BRC-R radio receiver may easily be installed inside the operator as its size is adapted to the available space. Simply fix it on the motor-gear-unit with two screws. We offer three different types of transmitters. Up to 1024 transmitters may be allocated to a DORMA BRC-R.

Article No.

BRC-R receiver 29300201

BRC-H



The hand-held transmitter provides two individually allocatable channels. Feedback via integrated LED: orange, red and green. Shock proof design and DORMA keychain.

Article No.

BRC-W receiver 29301001

BRC-W




The battery-operated wall transmitter in 55 mm design is made of white plastic and may easily be adhered to the wall or fixed with screws. It is suitable for light indoor-use.

Article No.

BRC-W receiver 29301002

BRC-T

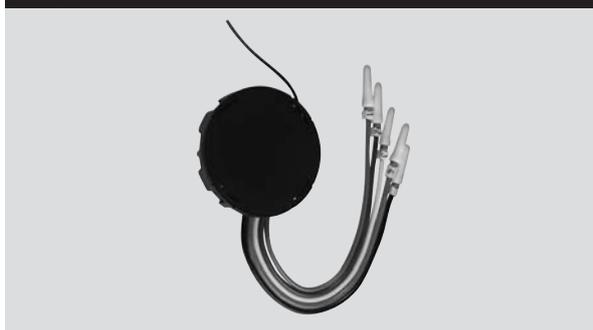

Battery-operated transmitter, designed for installation into a pushbutton with deep box for flush-mounting or into a surface-mounted large-sized pushbutton. In connection with the DORMA stainless-steel large-sized pushbutton it is also suitable for heavier conditions.

Article No.

BRC-T receiver 29301003

Radar motion detectors

Radar motion detectors respond to movements. They detect approaching people within their detection range and trigger the activation (opening) signal at the door operator. Thanks to their various adjustments, also difficult installations may be realised.

Radar motion detectors with direction recognition





Eagle, black




Eagle, white



Eagle, silver-coloured

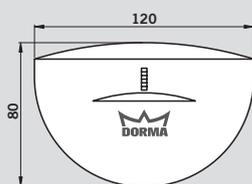

Merkur

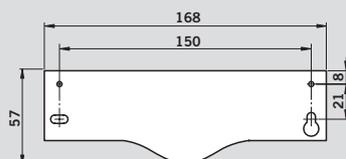

Eagle 1

With direction recognition,
black

Article No. 16503101170

white

Article No. 16503103170

silver-coloured

Article No. 16503102170

Merkur

Cross traffic suppression
with direction recognition,
black

Article No. 16532201170



DORMA infrared safety sensors are active infrared sensors and designed to detect all static and moving obstructions, either people or objects, within their detection range. On the opposite hinge side, the infrared safety sensor fulfils the function of an activator, which means that

the sensor will institute the door to reverse and open as soon as an obstruction is detected in the course of a closing cycle. Then the hold-open times starts anew. On the hinge side, the infrared safety sensor will interrupt the automatic movement of the door whenever it detects an obstruction;

the door closes on expiry of the adjusted hold-open time. DORMA infrared safety sensors are available in different lengths and may be supplied in the same colour as the operator. We offer two different types of infrared safety sensors: The DORMA IRS-4, which is required for areas where

compliance with DIN 18650 (German Industrial Standard) is essential and the DORMA IRS-2, a moving infrared safety sensor, which is suitable for areas that are not subject to DIN 18650.

IRS-4 active infrared safety sensor



DORMA IRS-4
According to DIN 18650, which describes safety-related requirements to automatic door systems, a risk assessment is to be performed before you bring

the automatic door system into service in order to ensure the safe installation and operation of the automatic door system. In case the risk assessment reveals that contactless

safety sensors are required, the swing path of the door has to be safeguarded by moving active infrared safety sensors such as the DORMA IRS-4. These sensors prevent the door leaf from

hitting people or objects. Moreover, the control unit performs cyclical tests in order to ensure the proper functioning of the DORMA IRS-4 sensor.

IRS-4 active infrared safety sensor		Colour	Article No.
IRS-4-35	With one sensor, length: 350 mm	silver-coloured	294350
	Type-approved in accordance with DIN 18650	special colour	294351
IRS-4-110	With two sensors, length: 1,100 mm	silver-coloured	294110
	Type-approved in accordance with DIN 18650	special colour	294111
IRS-4-160	With three sensors, length: 1,600 mm	silver-coloured	294160
	Type-approved in accordance with DIN 18650	special colour	294161

IRS-2 active infrared safety sensor



DORMA IRS-2

With the aid of the DORMA IRS-2, danger spots within the swing path of the door

may be safeguarded via moving active infrared safety sensors.


The DORMA IRS-2 is available in different lengths and with a variable number of infrared sensors. It further-

more prevents the door leaf from hitting people in the most relevant danger zones.

IRS-2 active infrared safety sensor		Colour	Article No.
IRS-2-33	With one sensor, length: 330 mm	silver-coloured	16521701150
		white	16521704150
		special colour	16521705150
IRS-2-70	With one sensor, length: 700 mm	silver-coloured	16521706150
		white	16521709150
		special colour	16521710150
IRS-2-90	With two sensors, length: 900 mm	silver-coloured	16521711150
		white	16521714150
		special colour	16521715150
IRS-2-120/2	With two sensors, length: 1,200 mm	silver-coloured	16521716150
		white	16521719150
		special colour	16521720150
IRS-2-120/3	With three sensors, length: 1,200 mm	silver-coloured	16521721150
		white	16521724150
		special colour	16521725150

Further accessories

Red-green display

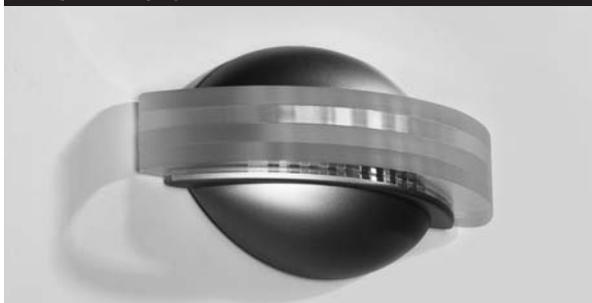

The red-green display indicates the status of the door system. The extravagant, semicircular designer light indicator is made of acryl, manufactured according to the latest LED technology and equipped with a high-grade LED display (24 V, brilliancy according to DIN VDE 0834, part 1). Its light signals are visible from both sides and the front – even from a large distance.
Light indicator, 24 V DC, LED display (red, green, white).

Article No. 05111631332

Emergency power supply unit



In order to provide unlimited safety to all visitors of a building, existing door systems have to remain fully functional even in the event of a power failure. This is achieved with the aid of the DORMA MT 700 USV emergency power supply unit. Depending on the connected accessories, this unit may keep the system operational for up to one hour by providing emergency power supply for the complete door system. Thus there is sufficient time for countermeasures and securing the building.

USV MT 700 V A emergency power supply unit, integrated in 230 V power supply line
Dimensions: 160 x 120 x 360 mm (H x W x D)

Article No. 05094531332

DORMA GmbH + Co. KG
DORMA Platz 1
D-58256 Ennepetal
Phone +49 2333/793-0
Fax +49 2333/793-495

Division Automatic worldwide

Region Australasia

Australia
DORMA Automatics Pty. Ltd.
Phone +61 3 8795 0666
www.dorma.com.au

New Zealand
DORMA HORIZON NZ LTD
Phone +64 9 573-1999
www.dorma.com.nz

Region Central Europe

Belgium
DORMA foquin N.V./S.A.
Phone +32 50 451570
www.dorma.be

Germany
DORMA Automatic
GmbH + Co. KG
Phone +49 2333 793-0
www.dorma.de

Luxembourg
Luxembourg Subsidiary
Automatic
Phone +49 2333 793-216
www.dorma.de

Netherlands
DORMA Nederland B.V.
Phone +31 488 418100
www.dorma.nl

Switzerland
DORMA Schweiz AG
Phone +41 718864646
www.dorma.ch

Region Emerging Markets

Bulgaria
DORMA-BALKAN EOOD
Phone +359 2 9714 904
www.dorma.com

Greece
DORMA Representation Greece
Phone: +30 21 09944388
www.dorma.com

India
DORMA Door Controls India
Pvt. Ltd.
Phone +91 44 28585097
www.dorma.com

Israel
DORMA GmbH + Co. KG
Phone +49 2333 793-0
www.dorma.com

Poland
DORMA Polska sp. z o.o.
Phone +48 22 7365900
www.dorma.pl

Russia
DORMA Russia
Phone +7 495 981-1433
www.dorma.rus

South Africa
DORMA Door Controls (Pty.) Ltd
Phone +27 11 8300280
www.dorma.com

Turkey
DORMA Kapi Kontrolleri Ltd.
Sti Sahraticecid Mah.
Phone: +90 216 3600056
www.dorma.com

Ukraine
DORMA Sales Representative
Vasyl Stuchilin
Phone +38 44 5183526
www.dorma.com

Region China

China
DORMA China Ltd.
Phone +86512 67612481
www.dorma.com.sg

Hong Kong
DORMA Door Controls (Suzhou)
Co., Ltd.
Phone +852 25034632
www.dorma.com.sg

Region Far East

Indonesia, Japan, Malaysia, Vietnam
DORMA Emerald Entrance
Systems Pte Ltd
Phone +65 459 5733
www.dorma.com.sg

Philippines
DORMA Door Controls Pte. Ltd.
Phone +632 893 4077/8
www.dorma.com.sg

Singapore
DORMA Far East Pte. Ltd.
(Sales)
Phone +65 64151898
www.dorma.com.sg

South Korea
DORMA Emerald Entrance
Systems Pte Ltd
Phone +65 459 5733
www.dorma.com.sg

Taiwan
DORMA Door Controls Pte. Ltd.
Phone +886 2 9182987
www.dorma.com.sg

Region France

France
DORMA Accueil S.A.S.
Phone +33 4 79348924
www.dorma.fr

Region Gulf

Saudi Arabia
DORMA Arabia Automatic
Doors Ltd.
Kingdom of Saudi Arabia
Phone +9663 847 2394
www.dorma.com

United Arab Emirates
DORMA Gulf Door Controls
FZE
Dubai, United Arab Emirates
Phone +971 48 839014
www.dorma.com

Region North America

Canada
DORMA Door Controls
Phone +1 905 6701281
www.dorma.com

Mexico
DORMA México, S. de R.L.
de C.V.
Phone +52 55 5272-6937
www.dorma.com

USA
DORMA Automatics Inc.
Phone +1 847 295-2700
www.dorma-usa.com

Region Scanbalt

Denmark
DORMA Danmark A/S
Phone +45 44 543000
www.dorma.dk

Estonia
DORMA Representation
Estonia
Phone +372 6707064
www.dorma.com

Finland
DORMA Finland Oy
Phone +358 9 8789130
www.dorma.fi

Lithuania
DORMA Norge AS
Phone +47 23 176800
www.dorma.com

Norway
DORMA Norge AS
Phone +47 23 176800
www.dorma.no

Sweden
DORMA Sverige AB
Phone +46 31 289520
www.dorma.se

Region South America

Argentina
DORMA Sistemas de
Controles para Portas Ltda
Phone +54 11 45051032
www.dorma.com

Brazil
DORMA Sistemas de Controles
para Portas Ltda.
Phone +55 11 46899128
www.dorma.com.br

Region South-East Europe

Austria
DORMA AKS
Automatic GmbH
Phone +43 6225 8636-0
www.dorma.at

Croatia
DORMA Croatia d.o.o.
Phone +385 0 1 46 06 944
www.dorma-croatia.hr

Czech Republic
DORMA dvorní technika CR,
s.r.o.
Phone +420 2 671321-78
www.dorma.com

Hungary
DORMA AKS Automatic GmbH
Phone +36 1 2065127
www.dorma.com

Romania
DORMA Romania S.R.L.
Phone +40 31 806 916 0
www.dorma.com

Slovakia
DORMA Slovensko spol. s.r.o.
Phone +421 2 50221-283
www.dorma.com

Slovenia
DORMA Representation
Slovenia ICL d.o.o.
Phone +386 2 5302010
www.dorma.com

Region South Europe

Italy
DORMA Italiana S.r.l.
Phone: +39 039 244031
www.dorma.it

Portugal
DORMA Portugal
para Portas, Lda.
Phone +351 252 860490
www.dorma.com

Spain
DORMA Ibérica, S.A.
Phone +34 91 8757850
www.dorma.es

Region UK/Ireland

Ireland
DORMA Ireland Limited
Phone +353 1 295-8280
www.dorma.com

Great Britain
DORMA UK Limited
Phone +44 1462 477600
www.dorma-uk.co.uk



Door Control



Automatic



**Glass fittings
and Accessories**



**Security Time
and Access (STA)**



Movable Walls