

Variflex

0

DORMA Hüppe. Movable Walls for modern interiors.

E

Tilling



Intelligent solutions for sophisticated interior design requirements



Modern living areas should provide those who use them with an enhanced quality of life. Movable partition walls from the DORMA Hüppe Variflex system offer the best possible solution there is.

Regardless of their characteristics and function, rooms can be effortlessly partitioned, made smaller, larger or reproportioned to suit individual requirements. Any area, from a small conference room to a large exhibition hall, can be optimally adapted to suit varying numbers of users. Excellent sound insulation properties allow different events to be held in adjacent areas without any intrusive noise.

This flexibility is the key to creating the perfect ambiance in any situation, distinguished by a broad range of surface finishes and coverings to satisfy any creative or aesthetic demand. Mobile partitioning coupled with flawless operating technology enables DORMA Hüppe to provide the ideal solution every time, ensuring that the people using the rooms feel at home, whatever the setting.



Customised flexibility for multi-functional layouts

From system configurations to in daily use. The more complex guarantees perfect solutions every time, even for rooms with practical considerations, with the questions asked of a mobile high or sloping ceilings or angled walls. Variflex from DORMA Hüppe, partitioning system, the louder the architectural design options the call for the DORMA Hüppe are almost limitless. Intelligent Variflex answer. The Variflex partitioning creates areas system can adapt even those perfectly customised to the areas with the most unusual given demands and functional dimensions to suit individual requirements. This guarantees requirements. The diversity the highest degree of flexibility and flexibility of the system



vith



DORMA



Functional design and aesthetics coupled with superior quality

A room is characterised primarily by its visual appearance. As a result, a room partitioning their visual effects are unsursystem should also blend in harmoniously with its given surroundings. With an almost infinite choice of designs and colours to cater for the most sophisticated design and layout wonder that DORMA Hüppe requests, DORMA Hüppe Variflex fulfils this requirement planning considerations. But admirably. Comprehensively translating creative and artistic craftsmanship embodied in ideas into reality, the Variflex system counters the most intricate aesthetic needs with a applies to the widest array of

multitude of design options. The high-quality materials and passed.

When it comes to the designoriented configuration of today's living areas, it is no Variflex has a role to play in all that's not all. The standard of DORMA Hüppe Variflex systems is also second to none. This

6

5



materials, from hardwood veneers through fabric coverings to laminated surfaces. Only this close attention to detail can guarantee the desired visual appearance for many years to come.

The use of exquisite materials and various material combinations can be particularly appealing. Wood and glass, wood and metal, for example, wood and stainless steel, and even different woods can all be combined, thus offering an

abundance of attractive design options with a visual effect that is both striking and immediate. It all comes down to the highly effective interaction of design and technology: clear evidence of the unparalleled ability of the DORMA Hüppe Variflex system to enhance today's interiors.





Greater flexibility and convenience – automatically

Variflex offers the option of semi-automatic operation to allow rooms to be adapted quickly and easily. This alternative is tried and tested solutions for everyday use: this is extremely economical to operate, thus reducing costs,

and also enjoy proven functional reliability as an important complementary aid to today's modern conference technology.



The system advantages of semi-automatic (HA) technology

- Electronically controlled sealing strip operation; the partitioning is moved manually; time and energy savings are made by eliminating crankwork
- Time and cost savings increase system economy; the precise contact pressure of the sealing strips is assured at all times
- Unlimited layout configurations; stacking and parking as for the manual system

• Minimal additional costs

 Floor-mounted guides and special track rails are not required

• Door and window elements can be fitted


• Generally enhanced user convenience

Leading the field in sound insulation

As well as having the function of visually subdividing areas, movable partition walls also have the role in many applications of filtering acoustic signals in order to prevent noise disturbing the users of the other rooms. Room partitioning with reliable acoustic insulation properties is a must, particularly when events run concurrently.

The outstanding craftsmanship of the DORMA Hüppe Variflex system ensures unsurpassed sound insulation without compromising ease of use.

The sound insulation values of DORMA Hüppe Variflex are constantly being tested and confirmed by internationally recognised testing authorities; both a challenge and an incentive to achieve even better results through new developments. As freely oscillating elements, the clip-on fascia boards block the transmission of structure-borne noise, thus ensuring extremely high sound insulation values. The fascias can be replaced at any time should this be required due to damage or to match new décor. Special acoustic panels manufactured with slits or holes encourage sound absorption and reduce reverberation.




These advantages, coupled with the high quality standards and the optical effect of DORMA Hüppe Variflex, greatly enhance user comfort and offer incomparable benefits for areas used for musical events and larger conferences. phase so that any acoustic issues such as noise paths or the use of a step noise reducing joint in the flooring can be discussed.

In order to ensure maximum levels of sound insulation in respect of a project, we recommend contacting DORMA Hüppe during the planning

Fire prevention precautions offer total security

Catastrophic and devastating fires feature again and again on news bulletins from around the world. In many instances, the buildings concerned have lacked adequate fire prevention measures. Fire safety is of paramount importance for protecting human life: secondrate solutions are simply not an option. Fire prevention and protection must be guaranteed, above all in public areas that are in constant use. Safeguarding human life must be the top priority at all times.

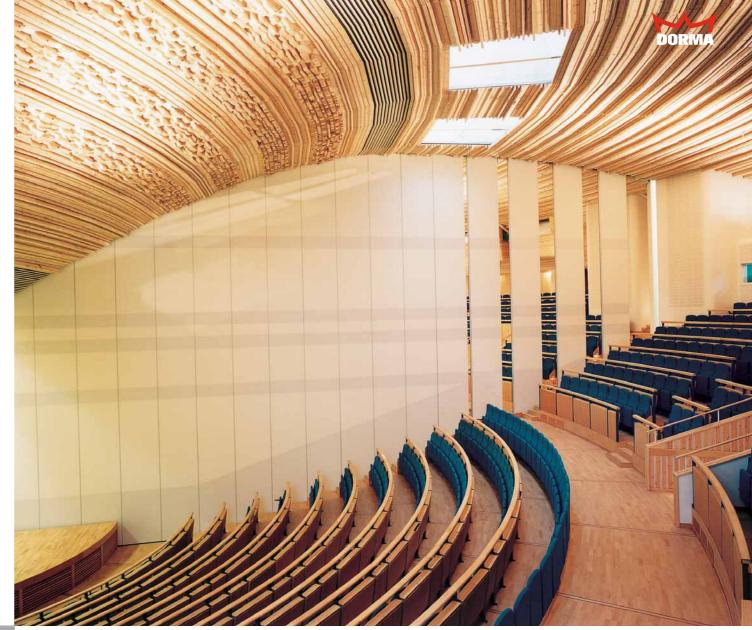



DORMA Hüppe Variflex offers intelligent solutions that are specifically adapted to meet preventative fire safety requirements and afford better conditions for dealing effectively with hazardous situation. The technical perfection of safety systems used by DORMA Hüppe means that Variflex can make a valuable contribution to protection human life in the event of fire.





A multitude of element types for every need

As a component offering ideal structural solutions in the creation of attractive living areas, mobile partitioning is having to satisfy increasing demands from an ever-widening range of applications.

However, the various element types available within the Variflex system from DORMA Hüppe can be used in applications of almost any kind and in the most widely diverse settings. Variflex systems can

match unique design features, satisfy special design specifications and incorporate door elements or a variety of window elements. The partitioning can be straight or angled, and can also accommodate special features such as sloping ceilings. Whatever the issue, DORMA

best solution.

Hüppe Variflex can provide the



Full wall element





with overlapping thrust unit)









Double pass door







Pass door with vision panel

Pass door within element




Variable track systems for modern architectural planning

In their parked position, the individual Variflex elements together form a compact stack. So they only take up a minimal amount of space in any room

(for examples, see diagram). Manually and automatically operated systems have different requirements, which is why we recommend prior consultation


at the planning stage. Whatever the final decision, DORMA Hüppe Variflex offers wide flexibility.




Parking layout A



Parking layout D




Parking layout B



Parking layout C



Parking layout E




Parking layout F





The sum of the advantages in detail

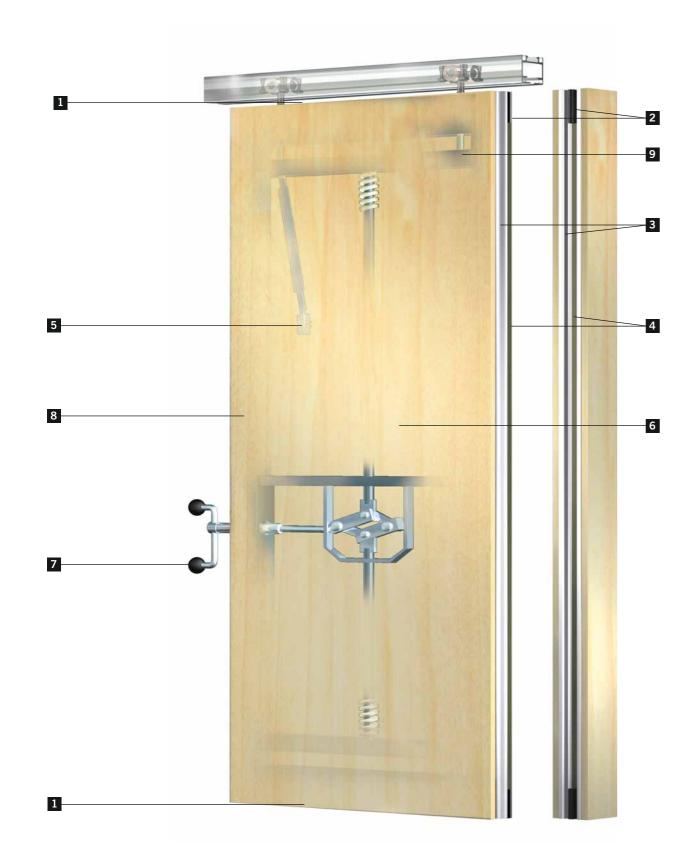

1 Horizontal seals

The principle of double-skin construction is applied consistently in the seal area in order to ensure maximum sound insulation. A spindle mechanism presses extendable, springloaded, double seals against the floor and the ceiling track. Any irregularities in the flooring are offset by spring-loaded double-chamber seals. The contact force of the sealing strips does not place excessive strain on screed floors, but does ensure that the Variflex system is sufficiently stable to prevent the panels moving, even in the event of an attempted forced entry.

2 Corner seals

Variflex resolves the technical issue of corner seals with specially designed, corner pieces that also reinforce the stability and sound insulation properties of the system.

3 Vertical seals

All Variflex models have flexible, vertical sealing strips to ensure the best possible seal for maximum sound insulation. The strips extend some distance into the panels to ensure positive interlock.

4 Magnetic strip

The individual panels are centred via the magnetic strips to guarantee sound positive locking and sealing.

5 Fascia boards

The acoustic fascia boards are clipped on as freely oscillating panels to ensure optimum sound insulation with minimum system weight. The fascias can be replaced without removing the panels. Their surfaces can be coated or covered with any conventional interior design material.

6 Sound insulation material

The various Variflex models can be fitted with additional insulation materials according to sound insulation requirements.

7 Operating handle

In manual systems, the element sealing strips are operated using a crank. The crank has as a captive bayonet fitting to prevent it from being pulled off. The bayonet arrangement is easy to disengage and prevents crank slippage.

8 Frames

The frame is made from torsionally stiff aluminium hollowchamber profiles and sectional steel tubing. Transverse forces will not, therefore, cause deformation of the frame. Combined with the panel mounted in acoustically free suspension, Variflex elements are able to offer both exceptional strength and outstanding sound insulation.

9 Roller assemblies

The dampening track roller assemblies prevent the transmission of impact forces and operating noise, so protecting the element, rail and carrier.



The type R rail system combined with cross-roll carriers is particularly suitable for right-angled branches and intersections. The track rollers mounted in ballbearings exhibit extremely quiet operation and are also maintenance-free. The system is ideal for a very wide range of different layouts and high element weights. Support rollers in the branch junctions and intersections prevent the elements from dropping as they pass through for increased user convenience and easier handling.



The type K rail system is a new compact alternative offering all the advantages of minimized dimensions. The mechanically coded branch junction technology with curves and switches ensures easy operation as the elements are transferred to their appropriate positions. Curved system configurations are possible.

TEF is synonymous with technical perfection that is unmatched by any other



manufacturer. TEF describes the flush edge connection of the last wall panel that serves

to form an area of visual harmony for an outstanding architectural solution.



18



■ The optimal partition for special requirements.

Finish and trim Panel design with K-type edge With visible surface edging With visible surface edging Panel design with U-type edge With protective surrounding trim With protective surrounding trim With protective surrounding trim Panel design with S-type edge	Manual (M) Semi-automatic (HA) Design	Clear height (min./max.) mm Element width (min./max.) mm Clear height (min./max.) mm Element width (min./max.) mm Framed construction Panel fixing Element interconnection/ design of the vertical profiles Panel design with <i>K-type edge</i> Panel design with <i>U-type edge</i> Panel design with <i>S-type edge</i> Manual model (M)	2,000/14,500 600/1,250 2,000/6,000 750/1,250 Aluminium-steel Freely oscillating Aluminium profile with integrated magnetic strip and sealing lips With visible surface edging With protective surrounding trim — Manual operation of the elements and actuation of the	2,000/14,500 600/1,250 2,000/6,000 750/1,250 Aluminium-steel Freely oscillating Aluminium profile with integrated magnetic strip and sealing lips With visible surface edging With protective surrounding trim With robust sheet steel skin up to Rw 58 dB Manual operation of the elements and actuation of the
Element width (min./max.) mm 600/1,250 600/1,250 Semi-automatic (HA) Clear height (min./max.) mm 2,000/6,000 2,000/6,000 Design Framed construction Aluminium-steel Aluminium-steel Panel fixing Freely oscillating Freely oscillating Element interconnection/ design of the vertical profiles Aluminium profile with integrated magnetic strip and sealing lips Aluminium profile with integrated magnetic strip and sealing lips Finish and trim Panel design with <i>K-type edge</i> With visible surface edging With visible surface edging Panel design with <i>S-type edge</i>	Semi-automatic (HA) Design	Element width (min./max.) mm Clear height (min./max.) mm Element width (min./max.) mm Framed construction Panel fixing Element interconnection/ design of the vertical profiles Panel design with <i>K-type edge</i> Panel design with <i>U-type edge</i> Panel design with <i>S-type edge</i> Manual model (M)	600/1,250 2,000/6,000 750/1,250 Aluminium-steel Freely oscillating Aluminium profile with integrated magnetic strip and sealing lips With visible surface edging With protective surrounding trim — Manual operation of the elements and actuation of the	600/1,250 2,000/6,000 750/1,250 Aluminium-steel Freely oscillating Aluminium profile with integrated magnetic strip and sealing lips With visible surface edging With protective surrounding trim With robust sheet steel skin up to Rw 58 dB Manual operation of the elements and actuation of the
Semi-automatic (HA) Clear height (min./max.) mm 2,000/6,000 2,000/6,000 Design Framed construction Aluminium-steel Aluminium-steel Aluminium-steel Panel fixing Freely oscillating Freely oscillating Freely oscillating Aluminium profile with integrated magnetic strip and sealing lips Finish and trim Panel design with <i>K-type edge</i> With visible surface edging With visible surface edging With visible surface edging Finish and trim Panel design with <i>K-type edge</i> — With visible surface edging With visible surface edging Finish and trim Panel design with <i>K-type edge</i> — With robust sheet steel skin up to Rw 58 dB Manual model (M) Manual operation of the elements and actuation of the elements, electronically controllex Manual operation of the elements, electronically controllex Semi-automatic model (HA) Manual operation of the elements, electronically controllex Special frame construction in conjunction with B1 (F30) cover board and sealing com pound Horizontal panel joint from element height (mm) 4100 4100 (with steel sheet skin: from 3200) Passdoors Single-leaf following technical clearance from factory Single-leaf or double-leaf Window ele	Design	Clear height (min./max.) mm Element width (min./max.) mm Framed construction Panel fixing Element interconnection/ design of the vertical profiles Panel design with <i>K-type edge</i> Panel design with <i>U-type edge</i> Panel design with <i>S-type edge</i> Manual model (M)	2,000/6,000 750/1,250 Aluminium-steel Freely oscillating Aluminium profile with integrated magnetic strip and sealing lips With visible surface edging With protective surrounding trim — Manual operation of the elements and actuation of the	2,000/6,000 750/1,250 Aluminium-steel Freely oscillating Aluminium profile with integrated magnetic strip and sealing lips With visible surface edging With protective surrounding trim With robust sheet steel skin up to Rw 58 dB Manual operation of the elements and actuation of the
Element width (min./max.) mm 750/1,250 750/1,250 Design Framed construction Aluminium-steel Aluminium-steel Panel fixing Freely oscillating Freely oscillating Aluminium profile with integrated magnetic strip and sealing lips Finish and trim Panel design with <i>K-type edge</i> With visible surface edging With visible surface edging Finish and trim Panel design with <i>K-type edge</i> With visible surface edging With robust sheet steel skin up to Rw 58 dB Manual model (M) Manual operation of the elements and actuation of the sealing strips Manual operation of the ele- ments, electronically controlled extension and retraction of the elements and actuation of the elements and retraction of the elements and retraction of the elements and retraction of the elements and retraction of the sealing strips Fire protection package <i>F30</i> - Special frame construction in conjunction with B1 (F30) cover board and sealing com pound Horizontal panel joint from element height (mm) 4100 4100 (with steel sheet skin: from 3200) Passdoors Single-leaf following technical clearance from factory Single-leaf or double-leaf Weighted sound reduction value Rw determined per 58/6	Design	Element width (min./max.) mm Framed construction Panel fixing Element interconnection/ design of the vertical profiles Panel design with <i>K-type edge</i> Panel design with <i>U-type edge</i> Panel design with <i>S-type edge</i> Manual model (M)	750/1,250 Aluminium-steel Freely oscillating Aluminium profile with integrated magnetic strip and sealing lips With visible surface edging With protective surrounding trim — Manual operation of the elements and actuation of the	750/1,250 Aluminium-steel Freely oscillating Aluminium profile with integrated magnetic strip and sealing lips With visible surface edging With protective surrounding trim With robust sheet steel skin up to Rw 58 dB Manual operation of the elements and actuation of the
Design Framed construction Aluminium-steel Aluminium-steel Panel fixing Freely oscillating Freely oscillating Freely oscillating Element interconnection/ design of the vertical profiles Aluminium profile with integrated magnetic strip and sealing lips Aluminium profile with integrated magnetic strip and sealing lips Finish and trim Panel design with <i>K-type edge</i> With visible surface edging With visible surface edging Panel design with <i>S-type edge</i> - With protective surrounding trim up to Rw 58 dB Manual model (M) Manual operation of the elements and actuation of the sealing strips Manual operation of the elements, electronically controlled extension and retraction of the sealing strips Semi-automatic model (HA) Manual operation of the ele- ments, electronically controlled extension and retraction of the sealing strips Manual operation of the ele- ments, electronically controlled extension and retraction of the sealing strips Fire protection package - Manual operation of the sealing strips Fire protection package Single-leaf following technical clearance from factory Single-leaf or double-leaf Horizontal panel joint from element height (mm) 4100 4100 (with steel sheet skin: from 3200) Single-leaf or double-leaf Passdoors		Framed construction Panel fixing Element interconnection/ design of the vertical profiles Panel design with <i>K-type edge</i> Panel design with <i>U-type edge</i> Panel design with <i>S-type edge</i> Manual model (M)	Aluminium-steel Freely oscillating Aluminium profile with integrated magnetic strip and sealing lips With visible surface edging With protective surrounding trim — Manual operation of the elements and actuation of the	Aluminium-steel Freely oscillating Aluminium profile with integrated magnetic strip and sealing lips With visible surface edging With protective surrounding trim With robust sheet steel skin up to Rw 58 dB Manual operation of the elements and actuation of the
Panel fixing Freely oscillating Freely oscillating Element interconnection / design of the vertical profiles Aluminium profile with integrated magnetic strip and sealing lips Aluminium profile with integrated magnetic strip and sealing lips Finish and trim Panel design with <i>K-type edge</i> With visible surface edging With visible surface edging Panel design with <i>U-type edge</i>		Panel fixing Element interconnection/ design of the vertical profiles Panel design with <i>K-type edge</i> Panel design with <i>U-type edge</i> Panel design with <i>S-type edge</i> Manual model (M)	Freely oscillating Aluminium profile with integrated magnetic strip and sealing lips With visible surface edging With protective surrounding trim — Manual operation of the elements and actuation of the	Freely oscillating Aluminium profile with integrated magnetic strip and sealing lips With visible surface edging With protective surrounding trim With robust sheet steel skin up to Rw 58 dB Manual operation of the elements and actuation of the
Element interconnection / design of the vertical profiles Aluminium profile with integrated magnetic strip and sealing lips Aluminium profile with integrated magnetic strip and sealing lips Finish and trim Panel design with <i>K-type edge</i> With visible surface edging With visible surface edging Panel design with <i>U-type edge</i> With visible surface edging With visible surface edging Panel design with <i>U-type edge</i> - With protective surrounding trim Panel design with <i>S-type edge</i> - With robust sheet steel skin up to Rw 58 dB Manual model (M) Manual operation of the elements and actuation of the sealing strips Manual operation of the ele- ments, electronically controlled extension and retraction of the sealing strips Manual operation of the ele- ments, electronically controlled extension and retraction of the sealing strips Fire protection package Special frame construction in conjunction with B1 (F30) Special frame construction in conjunction with B1 (F30) Horizontal panel joint from element height (mm) 4100 4100 (with steel sheet skin: from 3200) Single-leaf following technical clearance from factory Window element - Yes Sliding portion flush or external Sliding portion flush or external Technical Weighted sound reduction value Rw determined per Slidio 38 to 57 (sec 5, 8 dB)	Finish and trim	Element interconnection/ design of the vertical profiles Panel design with <i>K-type edge</i> Panel design with <i>U-type edge</i> Panel design with <i>S-type edge</i> Manual model (M)	Aluminium profile with integrated magnetic strip and sealing lips With visible surface edging With protective surrounding trim — Manual operation of the elements and actuation of the	Aluminium profile with integrated magnetic strip and sealing lips With visible surface edging With protective surrounding trim With robust sheet steel skin up to Rw 58 dB Manual operation of the elements and actuation of the
design of the vertical profiles integrated magnetic strip and sealing lips Finish and trim Panel design with K-type edge With visible surface edging With visible surface edging Panel design with U-type edge With visible surface edging With visible surface edging With visible surface edging Panel design with U-type edge With protective surrounding trim With protective surrounding trim With protective surrounding trim Panel design with S-type edge - With robust sheet steel skin up to Rw 58 dB Manual model (M) Manual operation of the elements and actuation of the sealing strips Manual operation of the elements, electronically controlled extension and retraction of the sealing strips Semi-automatic model (HA) Manual operation of the elements, electronically controlled extension and retraction of the sealing strips Fire protection package - Special frame construction in conjunction with B1 (F30) For enternet height (mm) 4100 4100 with steel sheet skin: from 3200) Passdoors Single-leaf following technical clearance from factory Single-leaf or double-leaf Window element - Yes Telescopic element design Sliding portion flush or external Sliding portion flush or external Window element - 58/60	Finish and trim	design of the vertical profiles Panel design with <i>K-type edge</i> Panel design with <i>U-type edge</i> Panel design with <i>S-type edge</i> Manual model (M)	integrated magnetic strip and sealing lips With visible surface edging With protective surrounding trim – Manual operation of the elements and actuation of the	integrated magnetic strip and sealing lips With visible surface edging With protective surrounding trim With robust sheet steel skin up to Rw 58 dB Manual operation of the elements and actuation of the
Panel design with U-type edge With protective surrounding trim With protective surrounding trim Panel design with S-type edge - With robust sheet steel skin up to Rw 58 dB Manual model (M) Manual operation of the elements and actuation of the sealing strips Manual operation of the elements and actuation of the elements and actuation of the elements, electronically controlled extension and retraction of the sealing strips Manual operation of the elements, electronically controlled extension and retraction of the sealing strips Fire protection package Special frame construction in conjunction with B1 (F30) cover board and sealing com pound Horizontal panel joint from element height (mm) 4100 4100 (with steel sheet skin: from 3200) Passdoors Single-leaf following technical clearance from factory Single-leaf or double-leaf Window element - Yes Telescopic element design Sliding portion flush or external Sliding portion flush or external Weighted sound reduction value Rw determined per 58/60 38 to 57 (as 5. F8 dP)	Finish and trim	Panel design with <i>U-type edge</i> Panel design with <i>S-type edge</i> Manual model (M)	With protective surrounding trim _ Manual operation of the elements and actuation of the	With protective surrounding trim With robust sheet steel skin up to Rw 58 dB Manual operation of the elements and actuation of the
Panel design with S-type edge With robust sheet steel skin up to Rw 58 dB Manual model (M) Manual operation of the elements and actuation of the sealing strips Manual operation of the elements and actuation of the sealing strips Semi-automatic model (HA) Manual operation of the elements, electronically controlled extension and retraction of the sealing strips Manual operation of the elements, electronically controlled extension and retraction of the sealing strips Fire protection package Special frame construction in conjunction with B1 (F30) Fire protection package - F30 - Horizontal panel joint from element height (mm) 4100 Horizontal panel joint from element height (mm) Single-leaf following technical clearance from factory Window element - Yes Telescopic element design Silding portion flush or external Weighted sound reduction value Rw determined per 58/60 38 to 57 (as \$158 dB)		Panel design with <i>S-type edge</i> Manual model (M)	Manual operation of the elements and actuation of the	With robust sheet steel skin up to Rw 58 dB Manual operation of the elements and actuation of the
Image: Section of the elements and actuation of the sealing strips Manual operation of the elements and actuation of the elements, electronically controlled extension and retraction of the sealing strips Fire protection package Manual operation of the sealing strips Manual operation of the elements, electronically controlled extension and retraction of the sealing strips Fire protection package - Special frame construction in conjunction with B1 (F30) cover board and sealing com pound Horizontal panel joint from element height (mm) 4100 4100 (with steel sheet skin: from 3200) Passdoors Single-leaf following technical clearance from factory Single-leaf or double-leaf Window element - Yes Telescopic element design Sliding portion flush or external Sliding portion flush or external Weighted sound reduction value Rw determined per 58/60 38 to 57 (as 5.58 dB)		Manual model (M)	elements and actuation of the	up to Rw 58 dB Manual operation of the elements and actuation of the
elements and actuation of the sealing strips elements and actuation of the sealing strips Semi-automatic model (HA) Manual operation of the elements, electronically controlled extension and retraction of the sealing strips Manual operation of the elements, electronically controlled extension and retraction of the sealing strips Fire protection package - Special frame construction in conjunction with B1 (F30) cover board and sealing com pound Horizontal panel joint from element height (mm) 4100 4100 (with steel sheet skin: from 3200) Passdoors Single-leaf following technical clearance from factory Single-leaf or double-leaf Window element - Yes Telescopic element design Sliding portion flush or external Sliding portion flush or external Weighted sound reduction value Rw determined per 58/60 38 to 57 (ac S) 58 dB)			elements and actuation of the	elements and actuation of the
ments, electronically controlled extension and retraction of the sealing strips ments, electronically controlled extension and retraction of the sealing strips Fire protection package		Semi-automatic model (HA)		sealing strips
F30 - conjunction with B1 (F30) - cover board and sealing compound Horizontal panel joint 4100 4100 (with steel sheet skin: from 3200) Passdoors Single-leaf following technical clearance from factory Single-leaf or double-leaf Window element - Yes Telescopic element design Sliding portion flush or external Sliding portion flush or external Weighted sound reduction value Rw determined per 58/60 38 to 57 (ar S) 58 dB)			ments, electronically controlled extension and retraction of the	ments, electronically controlled extension and retraction of the
from element height (mm) 4100 from 3200) Passdoors Single-leaf following technical clearance from factory Single-leaf or double-leaf Window element - Yes Telescopic element design Sliding portion flush or external Sliding portion flush or external Weighted sound reduction value Rw determined per 58/60 38 to 57 (as Si 58 dB)			_	cover board and sealing com-
clearance from factory Window element - Yes Telescopic element design Sliding portion flush or external Sliding portion flush or external Technical Weighted sound reduction value Rw determined per 58/60 38 to 57 (as Si 58 dB)			4100	
Telescopic element design Sliding portion flush or external Sliding portion flush or external Technical Weighted sound reduction value Rw determined per 58/60 38 to 57		Passdoors		Single-leaf or double-leaf
TechnicalWeighted sound reduction38 to 57value Rw determined per58/60(ac St 58 dB)		Window element	-	Yes
value Rw determined per 58/60 (as St 58 dB)		Telescopic element design	Sliding portion flush or external	Sliding portion flush or external
	Technical	value Rw determined per	58/60	
K-value per DIN with maximum sound insulation package (heat transfer coefficient)0.3800.664		sound insulation package (heat	0.380	0.664
Contact pressure of the horizontal sealing strips per element in Newton up to1,5001,500		horizontal sealing strips per	1,500	1,500
Positive and frictional locking of the vertical element connec- tions			·	
tions		Rail type	Smart Track and R-rail	Smart Track, R and K-rail

* Note regarding Variflex dimensions: Larger widths possible on application. Provisional details regarding the element heights/element widths indicated can only be confirmed following consultation with the Design Department.





An unlimited choice of surface finishes

One of the factors which characterises modern interior design is intelligent space partitioning to create an architectural "choreography" of light and shadow. The partition walls are a significant part of the 

whole and, with striking surface contrasts, can play a role in an effective overall presentation.

DORMA Hüppe Variflex further enhances the aesthetic appearance with superiorquality surface finishes. A wide array of materials can be marshalled to create quite stunning visual effects. Materials to choose from include real wood veneers that can be ebonised, waxed, brushed or lime-washed. There are laminates and metallic finishes, granite fabric coverings and stainless steel inserts; acoustic, sheet steel and fibreglass surfaces; glass inserts, mirrors and textile coverings. And many more options besides. Whatever the requirement, we have the surface finish to match. DORMA Hüppe Variflex offers the best solution every time.







Door Control



Automatic



Glass Fittings and Accessories



Security/Time and Access Control (STA)



Movable Walls

DORMA Hüppe Austria GmbH Hollabererstraße 4b A-4020 Linz Phone +43 732 600451 Fax +43 732 650326 office@dorma-hueppe.at www.dorma-hueppe.at

DORMA Gulf Door Controls FZE P.O.Box 17268, Jebel Ali Free Zone South Dubai, United Arab Emirates Phone +971 4 8020-400 Fax +971 4 8869-101/100 movablewalls@dormagulf.com www.dorma-gulf.com

DORMA Malaysia Sdn. Bhd. P.O.Box 55, PLO 217, Jalan Siber 10 Kawasan Perindustrian Senai IV MY-81400 Senai Johor Phone +60 7 598 57 30 Fax +60 7 598 57 29 www.dorma.com.sg

Style South Consort House, Princes Road Ferndown, Dorset, BH22 9JG Phone +44 1202 874044 Fax +44 1202 874844 www.style-partitions.co.uk south@style-partitions.co.uk DORMA Ibérica S.A. Camino de San Martin de la Vega, 4 E-28500 Arganda del Rey (Madrid) Phone +34 91 8757852 Fax +34 91 8757884 jmarroyo@dorma.es

www.dorma.es

DORMA Polska Sp. z o.o. Dział ścian przesuwnych DORMA Hüppe UI. Warszawska 72 PL-05-520 Konstancin-Jeziorna Phone +48 22 7365900 Fax +48 22 7365901 huppe@dorma.com.pl www.dorma.pl

DORMA Sverige AB Industrivägen 5 SE-171 48 Solna Phone +46 31 289520 Fax +46 8 50552929 info@dorma.se www.dorma.se

DORMA Hüppe Raumtrennsysteme GmbH + Co. KG Industriestraße 5 D-26655 Westerstede/Ocholt Postfach 2190 D-26648 Westerstede Phone +49 4409 666-0 Fax +49 4409 666-489 info.hueppe@dorma.com www.dorma-hueppe.com

Drucker fe