




SISTEMI EKU[®] WOODART TT AS




SISTEMI EKU® WWOODART TT AS

TIPOVI


Pomoću serije EKU WOODART moguće je izraditi prozore i vrata s dva, tri ili četiri krila velikih dimenzija i težina s podizno-kliznim otvaranjem. Mogućnost rješenja sa dvije klizne vodilice.

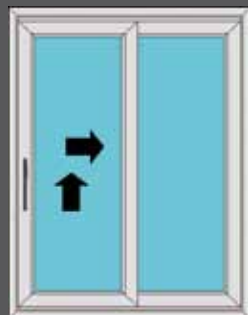

dvokrilna podizno-klizna staklena vrata

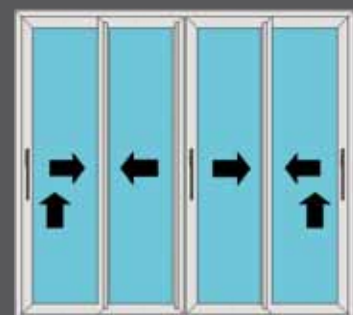

četverokrilna klizna staklena vrata

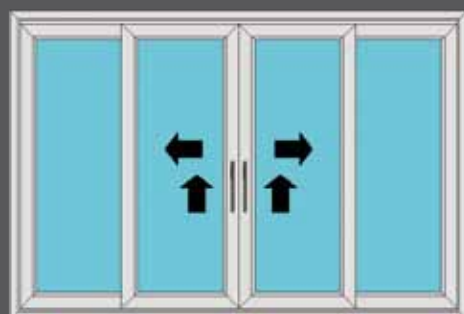


četverokrilna podizno-klizna staklena vrata



PREDNOSTI

- krila koja ne zauzimaju puno prostora
- dobra termička izolacija zagarantirana drvenom oblogom i izolacijskim šipkicama
- elegancija drva sjedinjena s praktičnošću aluminija
- dizajn koji ispunjava svaki estetski zahtjev
- visoka otpornost i minimalno održavanje
- mogućnost realizacije ostakljenja velikih dimenzija s maksimalnim osvetljenjem
- bogat asortiman profila, oblika i boja koji omogućuju raznovrsna rješenja

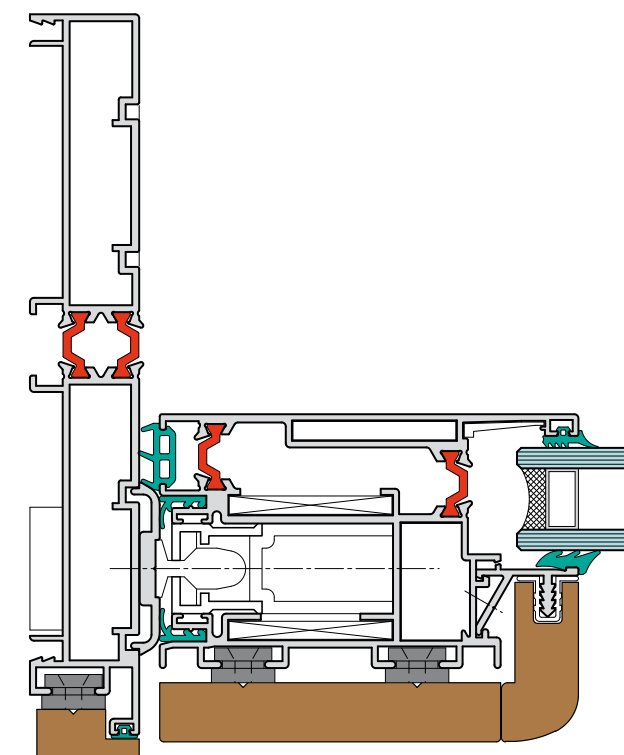



Osnovne dimenzije:



Tip sistema:	Mješovit sistem aluminij-drvo s termičkim mostom - podizno klizno otvaranje
Osnovne dimenzije:	presjek fiksnog štoka: 182 mm, presjek krila 80 mm
Prosječan presjek:	173,5 mm
Maksimalna debljina stakla ili panela:	30 mm
Dimenzije izolacijskih šipkica:	16 mm
Visina utora stakla:	19 mm
Maksimalna nosivost kotača po krilu:	300 kg (2 kotača)
Utor za okov:	mjere prema potrebnim okovima
Izolacijski sistem zrak/voda:	brtve na četkicu i u EPDM
Koeficijent toplinske provodljivosti profila:	Uf = 3,08 ÷ 4,61
Zrakopropusnost (razred):	2
Vodonepropusnost (razred):	A2
Otpornost na vjetar (razred):	C3

Uf koeficijent
3,08 ÷ 4,61 W/m² K

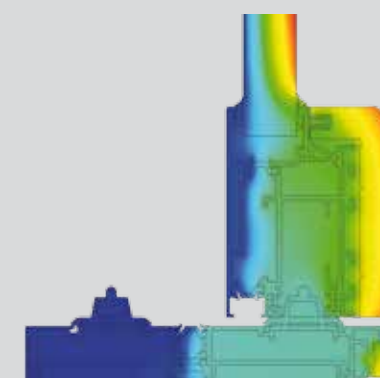

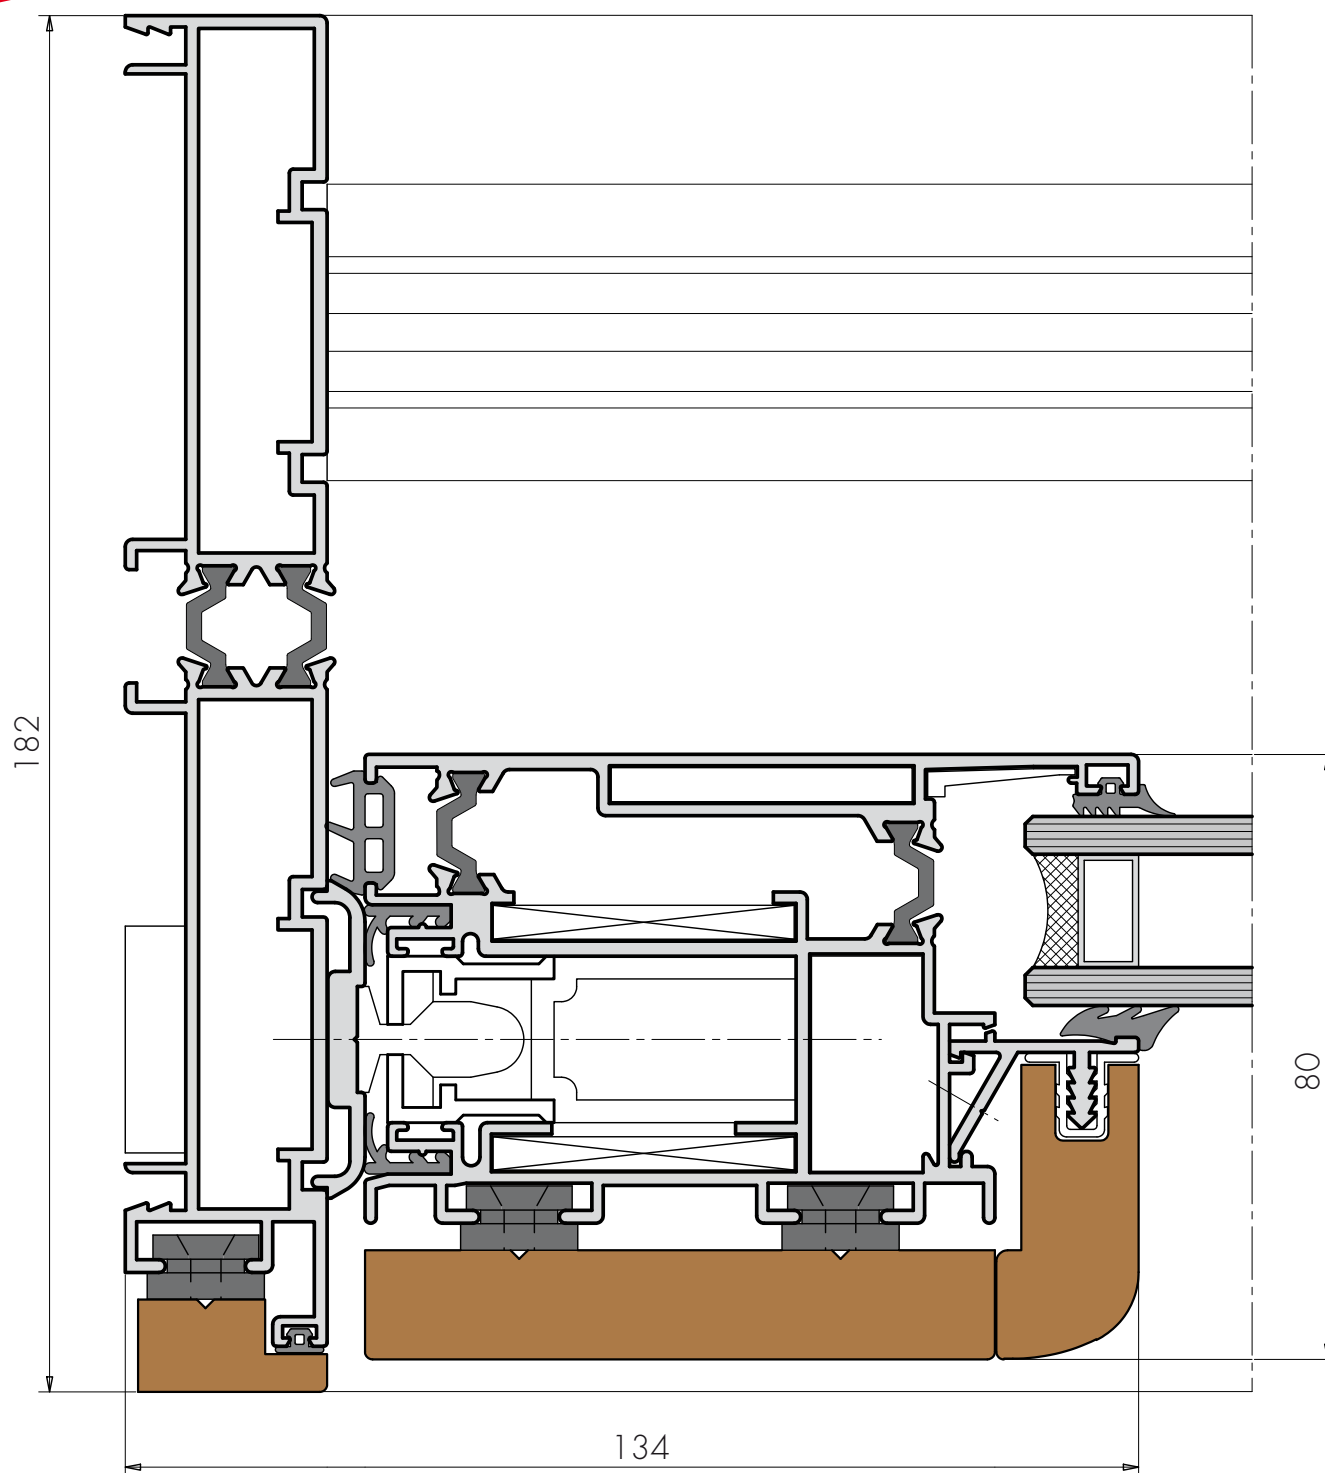

Sjedište Rijeka: Blažići 23, 51216 Viškovo
Tel: 051 504 150, Fax: 051 504 180

Poslovnica Zagreb: F. Lučića 23, Jankomir, 10000 Zagreb
Tel: 01 348 48 88, Fax: 01 348 48 90

Poslovnica Zadar: N. Jurišića 49, 23000 Zadar
Tel: 023 643 610, Fax: 023 341 094

info@zekic.hr